

SCX 1200-3

HYDRAULIC CRAWLER CRANE

Specifications & Lifting Capacities

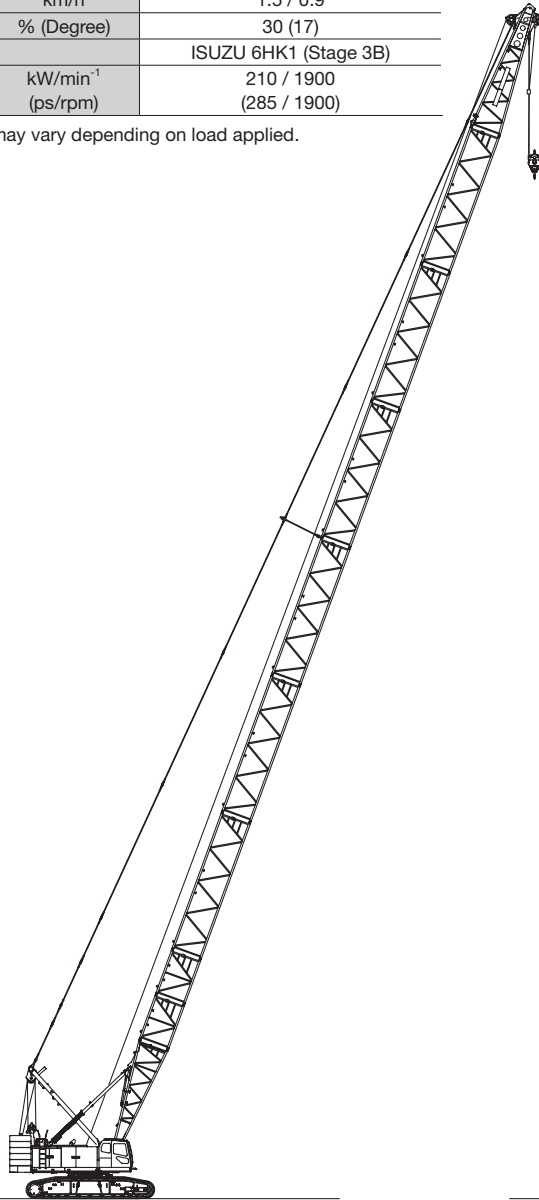
HITACHI SUMITOMO



Variation of The Attachment


Line Speed *	Front / Rear Winch (Rated with 12 t load)	m/min	110 (45)
	Third Winch (Rated with 12 t load)		95 (30)
	Boom Hoist Winch		44
	Tower Jib Hoist Winch		55
Swing Speed	min ⁻¹ (rpm)		1.7
Travel Speed High / Low *	km/h		1.5 / 0.9
Gradeability	% (Degree)		30 (17)
Engine Model			ISUZU 6HK1 (Stage 3B)
Engine Rated Output Power	kW/min ⁻¹		210 / 1900
	(ps/rpm)		(285 / 1900)

Note : Speeds marked with "*" may vary depending on load applied.




**Crane Specification
(Boom Longest Length)**

Boom Length	m	15 to 75
Ground Contact Pressure	kPa (kgf/cm ²)	94 (0.96) (Boom longest length with 35 t hook)
Overall Operating Weight	t	Approximately 130 (Boom longest length with 35 t hook)

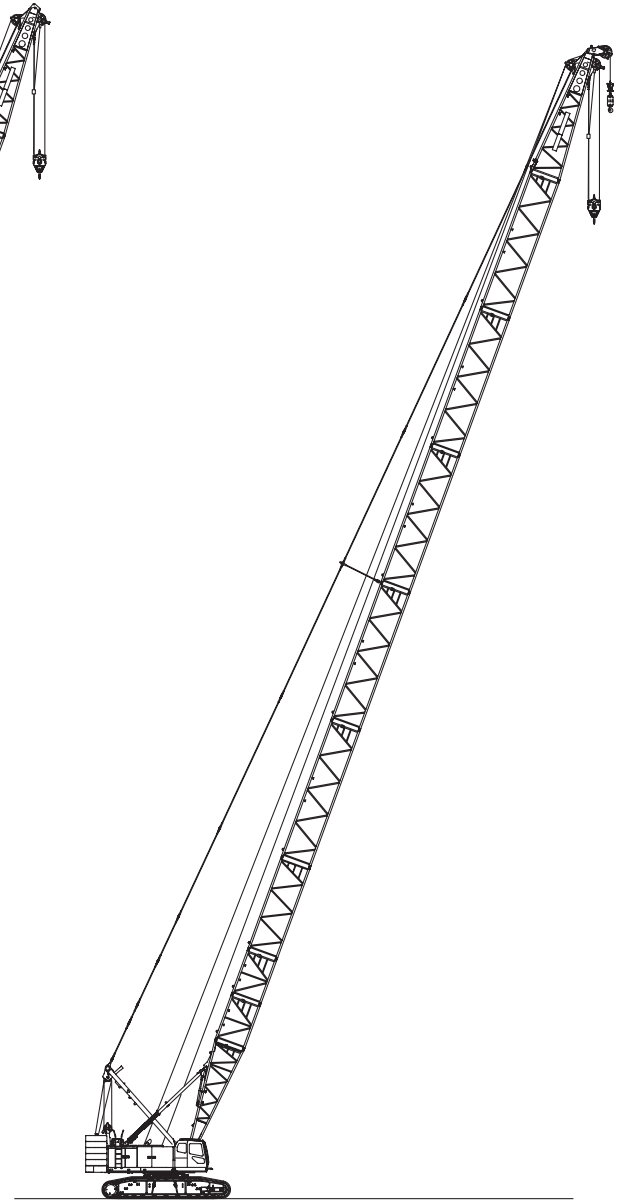


**Crane Specification
(Boom Longest Length with Aux. Sheave)**

Boom Length	m	15 to 72
Ground Contact Pressure	kPa (kgf/cm ²)	94 (0.96) (Boom longest length + 35 t aux. sheave + 12 t hook attached)
Overall Operating Weight	t	Approximately 131 (Boom longest length + 35 t aux. sheave + 12 t hook attached)

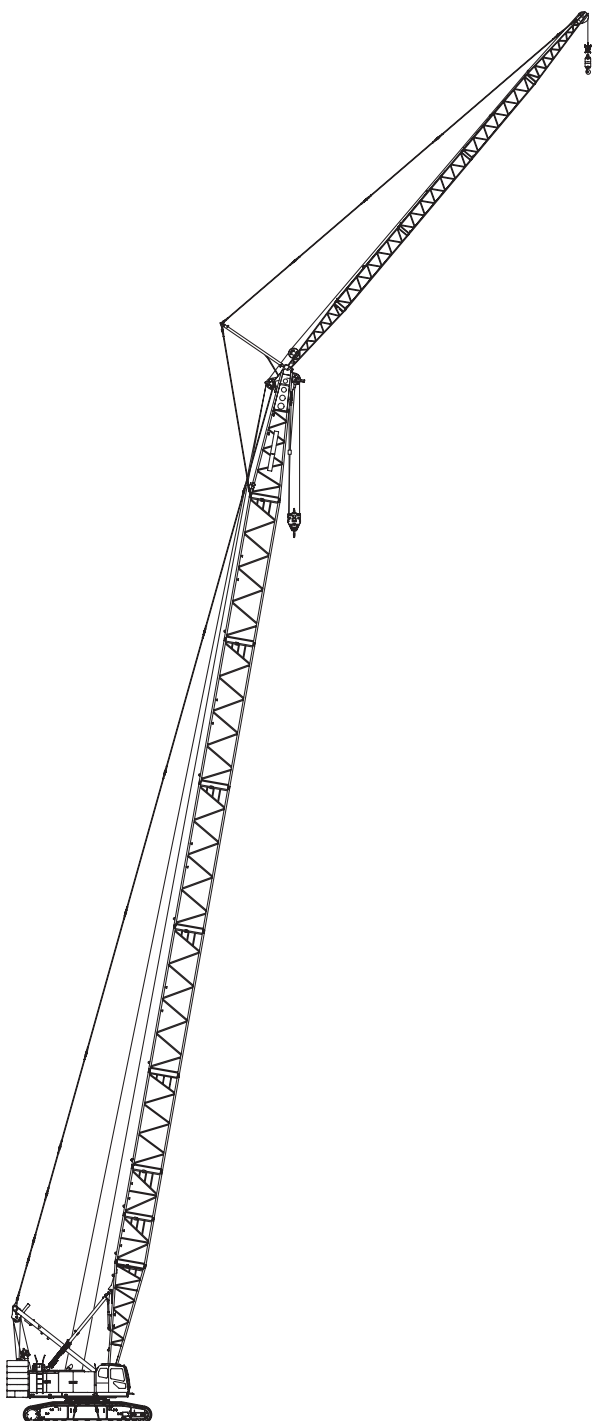

**Crane Specification
(Boom Longest Length with Crane Jib)**

Boom Length	m	24 to 63
Crane Jib Length	m	10 to 28
Boom + Crane Jib Longest Length	m	63 + 28
Ground Contact Pressure	kPa (kgf/cm ²)	94 (0.96) (Boom + crane jib longest length 35 t + 12 t hook attached)
Overall Operating Weight	t	Approximately 131 (Boom + crane jib longest length 35 t + 12 t hook attached)

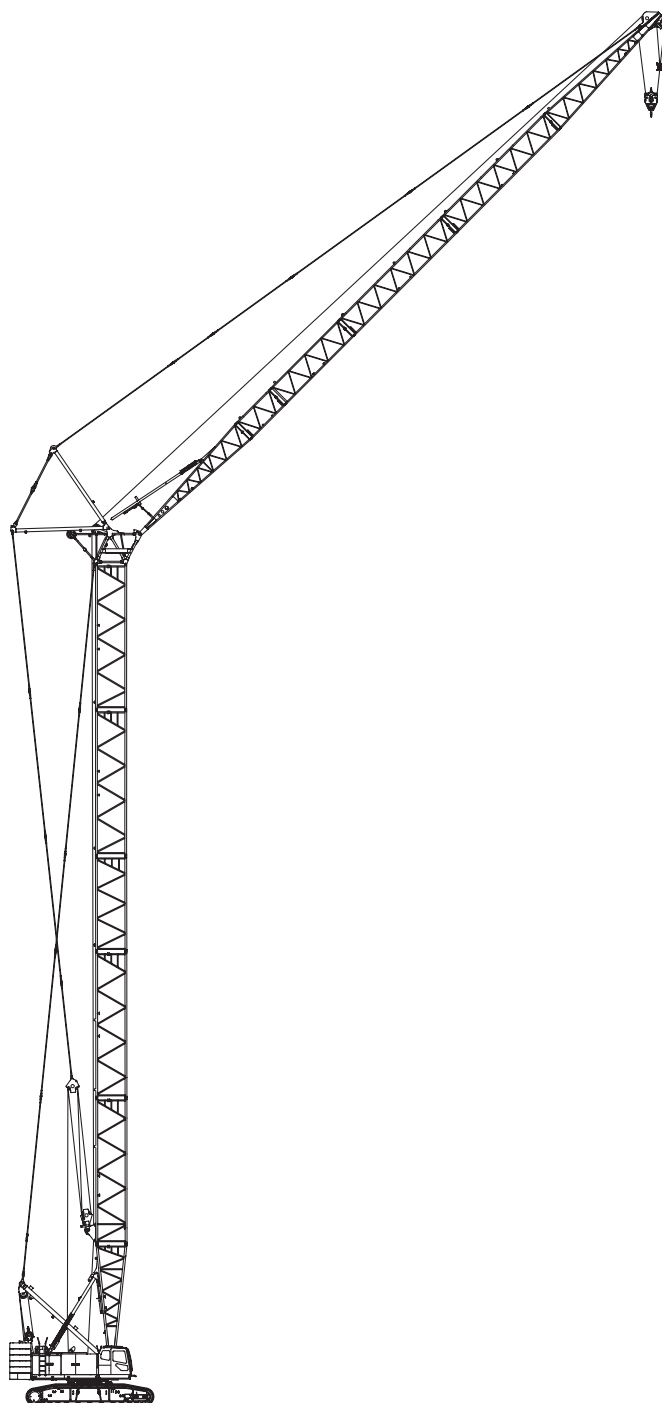

**Tower Specification
(Tower + Tower Jib Longest Length)**

Tower Length	m	30.35 to 51.35
Tower Jib Length	m	24 to 45
Tower + Tower Jib Longest Length	m	51.35 + 45
Ground Contact Pressure	kPa (kgf/cm ²)	99 (1.01) (Tower + tower jib longest length with 35 t hook attached)
Overall Operating Weight	t	Approximately 137 (Tower + tower jib longest length with 35 t hook attached)

VARIATION

Variation of The Attachment

2

SPECIFICATIONS

Crane Specifications

6

Dimensions and Specifications.....6

Boom and Crane Jib Configurations7

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)9

Working Ranges10

■ Main Boom (With Crane Boom Extensions)..... 10

■ Main Boom with Aux. Sheave (With Crane Boom Extensions) 11

■ Main Boom with 28 m Crane Jib (With Crane Boom Extensions)..... 12

■ Main Boom (With Tower Boom Extensions)..... 13

■ Main Boom with Aux. Sheave (With Tower Boom Extensions) 14

■ Main Boom with 28 m Crane Jib (With Tower Boom Extensions)..... 15

Gross Rated Load Table16

■ Main Boom (With Crane Boom Extensions)..... 16

■ Aux. Sheave (With Crane Boom Extensions) 17

■ Main Boom with Aux. Sheave (With Crane Boom Extensions) 18

■ Crane Jib (With Crane Boom Extensions)..... 19

■ Main Boom with Crane Jib (With Crane Boom Extensions)..... 26

■ Main Boom (Using Third Winch) (With Crane Boom Extensions)..... 33

■ Main Boom with Aux. Sheave (Using Third Winch) (With Crane Boom Extensions)..... 34

■ Main Boom (With Tower Boom Extensions)..... 35

■ Aux. Sheave (With Tower Boom Extensions) 36

■ Main Boom with Aux. Sheave (With Tower Boom Extensions) 37

■ Crane Jib (With Tower Boom Extensions)..... 38

■ Main Boom with Crane Jib (With Tower Boom Extensions)..... 45


■ Main Boom (Using Third Winch) (With Tower Boom Extensions)..... 52

■ Main Boom with Aux. Sheave (Using Third Winch) (With Tower Boom Extensions)..... 53

Tower Specifications	54
Dimensions and Specifications.....	54
Tower and Tower Jib Configurations.....	55
Working Ranges	56
Gross Rated Load Table	57
■ 30.35 m Tower.....	57
■ 33.35 m Tower.....	57
■ 36.35 m Tower.....	58
■ 39.35 m Tower.....	59
■ 42.35 m Tower.....	60
■ 45.35 m Tower.....	61
■ 48.35 m Tower.....	62
■ 51.35 m Tower.....	64
Clamshell Specifications	66
Dimensions and Specifications.....	66
■ Working Ranges	66
■ Specifications.....	66
■ Clamshell Bucket	66
■ Gross Rated Load Table.....	66
TECHNICAL DATA	
Weights and Dimensions of Disassembled Units	67
Weights and Dimensions List.....	67
Equipment List	73
Standard and Optional Equipment	73

Crane Specifications

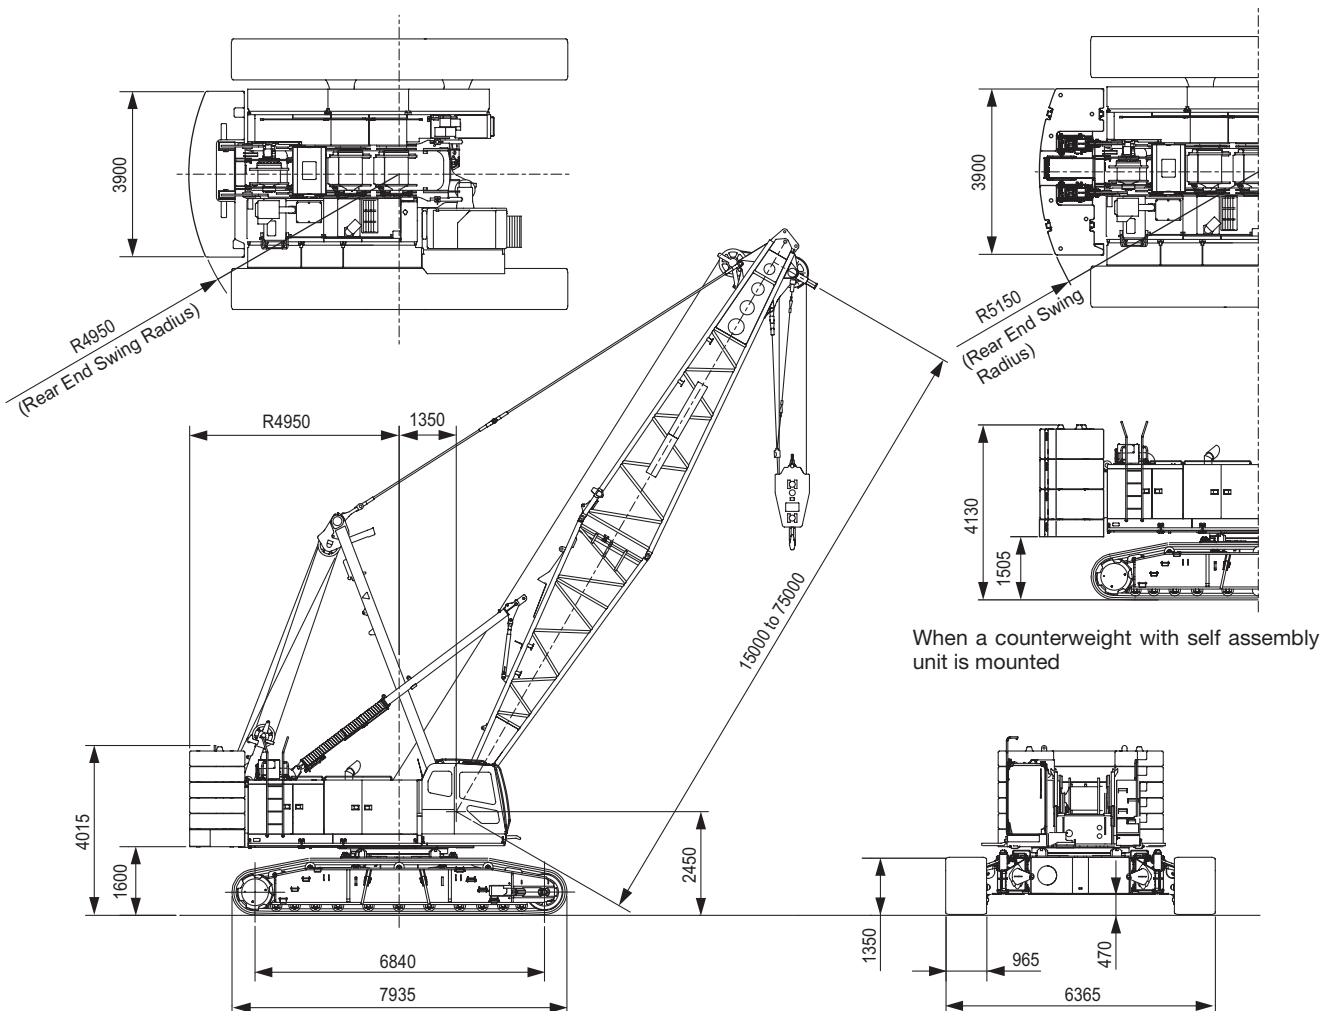Dimensions and Specifications



Crane Specifications

Max. Lifting Load × Working Radius	t × m	120×5.0
Basic Boom Length	m	15
Max. Boom Length	m	75
Max. Crane Jib Length	m	10 to 28
Max. Boom + Jib Length	m	63 + 28
Ground Contact Pressure	kPa (kgf/cm ²)	88 (0.9) (w / Basic Boom, 120 t Hook)
Overall Operating Weight	t	Approximately 122 (w / Basic Boom, 120 t Hook)

Hook Weight

120 t	1,640 kg
80 t	1,350 kg
35 t	900 kg
12 t	510 kg

NOTE : Data is expressed in SI units followed by conventional units in ().

Front/Rear Third Winch Rope No. of Falls and Lifting Load

Hook Capacity (t)	Maximum Rated Load (t)									
	10 Falls	9 Falls	8 Falls	7 Falls	6 Falls	5 Falls	4 Falls	3 Falls	2 Falls	1 Fall
120	120	108	96	84	72	60	48	36	24	-
80	-	-	-	80	72	60	48	36	24	-
35	-	-	-	-	-	-	-	35	24	-
12	-	-	-	-	-	-	-	-	-	12

Boom and Crane Jib Configurations

With Crane Boom Extensions

Boom (1/2)	
Boom Length (m)	Boom Configurations
15	
18	
21	
24	
27	
30	
33	
36	
39	
42	
45	

Boom (2/2)	
Boom Length (m)	Boom Configurations
48	
51	
54	
57	
60	
63	
66	
69	
72	
75	

▽ indicates the midpoint pendant rope connection position.


Aux. Sheave Installable Boom Length																					
Boom Length (m)	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
With Aux. Sheave	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×

(○: Attachable ×: Not Attachable)

(○ : Attachable × : Not Attachable)

Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure		Pendant Rope		
Symbols	Boom Length (m)	Length (m)	Rope Diameter (mm)	Imprint
3	3	1.2	40	□ • △ • 40 • 1.2 • C
6	6	2.6	40	□ • △ • 40 • 2.55 • C
7.5	7.5	3	40	□ • △ • 40 • 3 • C
9	9	6	40	□ • △ • 40 • 6 • C
		6.9	40	□ • △ • 40 • 6.9 • C
		9	40	□ • △ • 40 • 9 • C



With Tower Boom Extensions

Boom (1/2)	
Boom Length (m)	Boom Configurations
15	
18	
21	
24	
27	
30	
33	
36	
39	
42	
45	

Boom (2/2)	
Boom Length (m)	Boom Configurations
48	
51	
54	
57	
60	
63	
66	
69	
72	
75	

▽ indicates the midpoint pendant rope connection position.

Aux. Sheave Installable Boom Length																					
Boom Length (m)	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
With Aux. Sheave	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×


(○: Attachable ×: Not Attachable)

(○: Attachable ×: Not Attachable)

Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure	
Symbols	Boom Length (m)
3	3
6	6
7.5	7.5
9	9

Pendant Rope			
Length (m)	Rope Diameter (mm)	Imprint	
1.2	40	□ • △ • 40 • 1.2 • C	
2.6	40	□ • △ • 40 • 2.55 • C	
3	40	□ • △ • 40 • 3 • C	
6	40	□ • △ • 40 • 6 • C	
6.9	40	□ • △ • 40 • 6.9 • C	
9	40	□ • △ • 40 • 9 • C	



Combination of Boom and Crane Jib (Offset Angle 10° and 30°)

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)

Boom Length (m)	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
Jib Length (m)	10	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
16	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
22	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
28	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×

(○ : Attachable × : Not Attachable)

Crane Jib (Offset Angle 10° and 30°)

Crane Jib Length (m)	Offset Angle	Crane Jib Configurations
10	10°	
	30°	
16	10°	
	30°	
22	10°	
	30°	
28	10°	
	30°	


Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure

Symbols	Jib Length (m)
5	5.00
6	6.00


Jib Pendant Rope

Length (m)	Rope Diameter (mm)	Imprint
1.4	24	□ • △ • 24 • 1.4 • S
5.7	24	□ • △ • 24 • 5.7 • S
9.6	24	□ • △ • 24 • 9.6 • S
10	26	□ • △ • 26 • 10 • S




Working Ranges

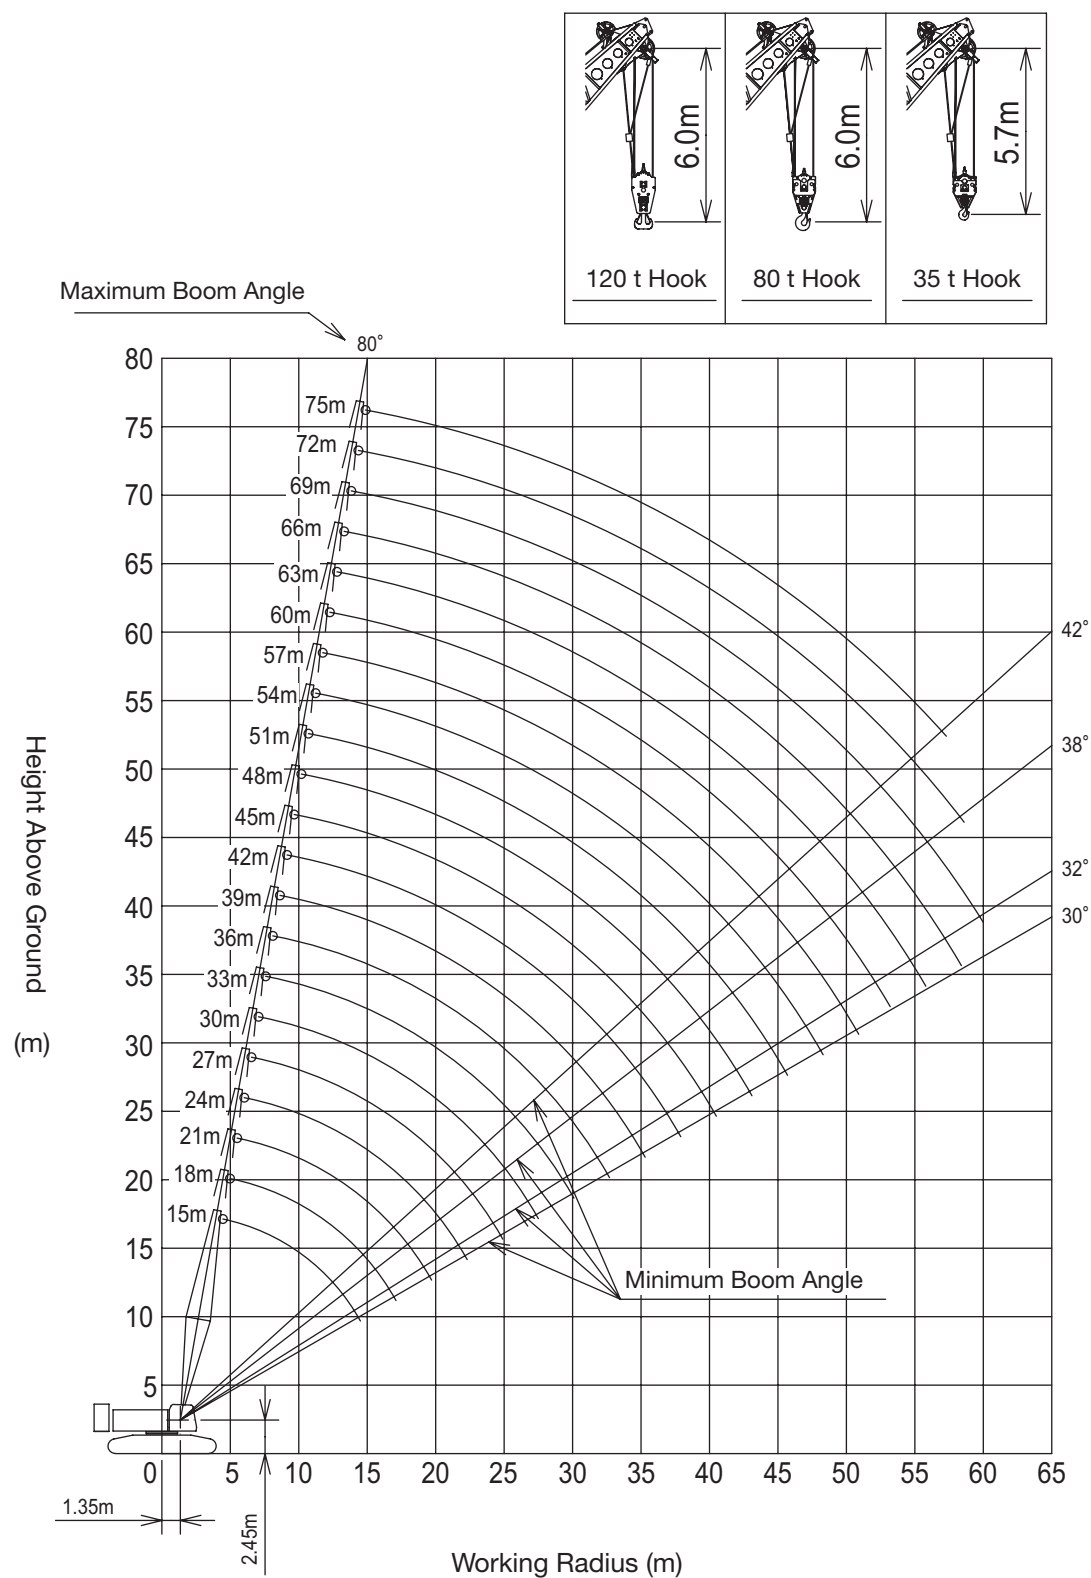
■ Main Boom (With Crane Boom Extensions)



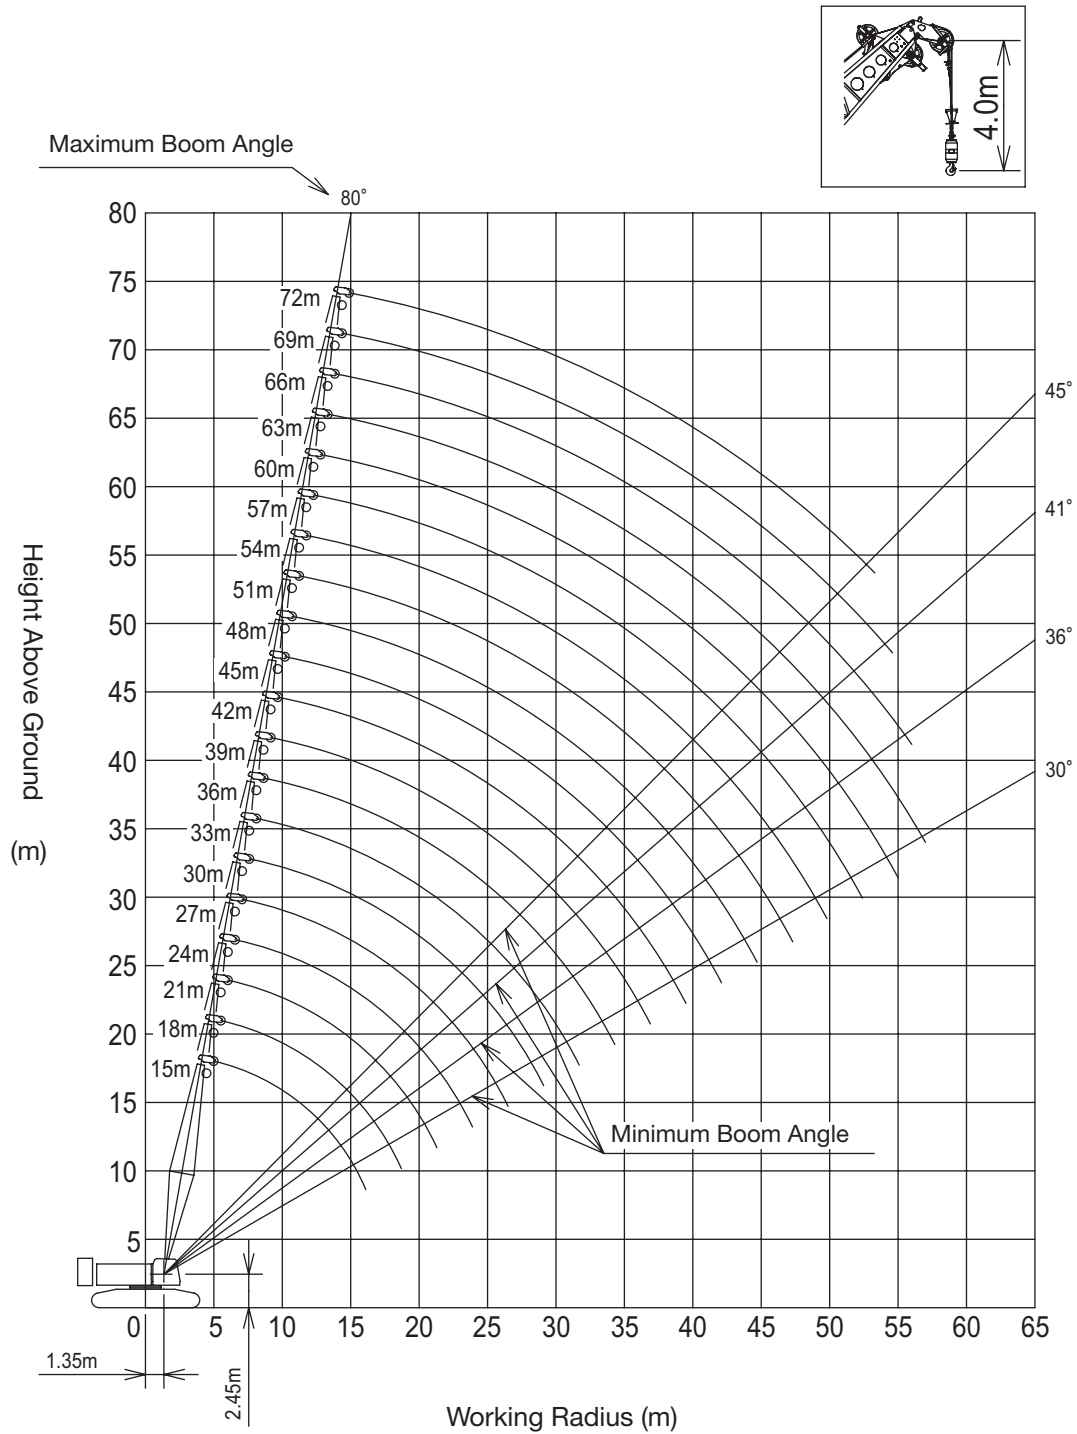
■ Main Boom with Aux. Sheave (With Crane Boom Extensions)



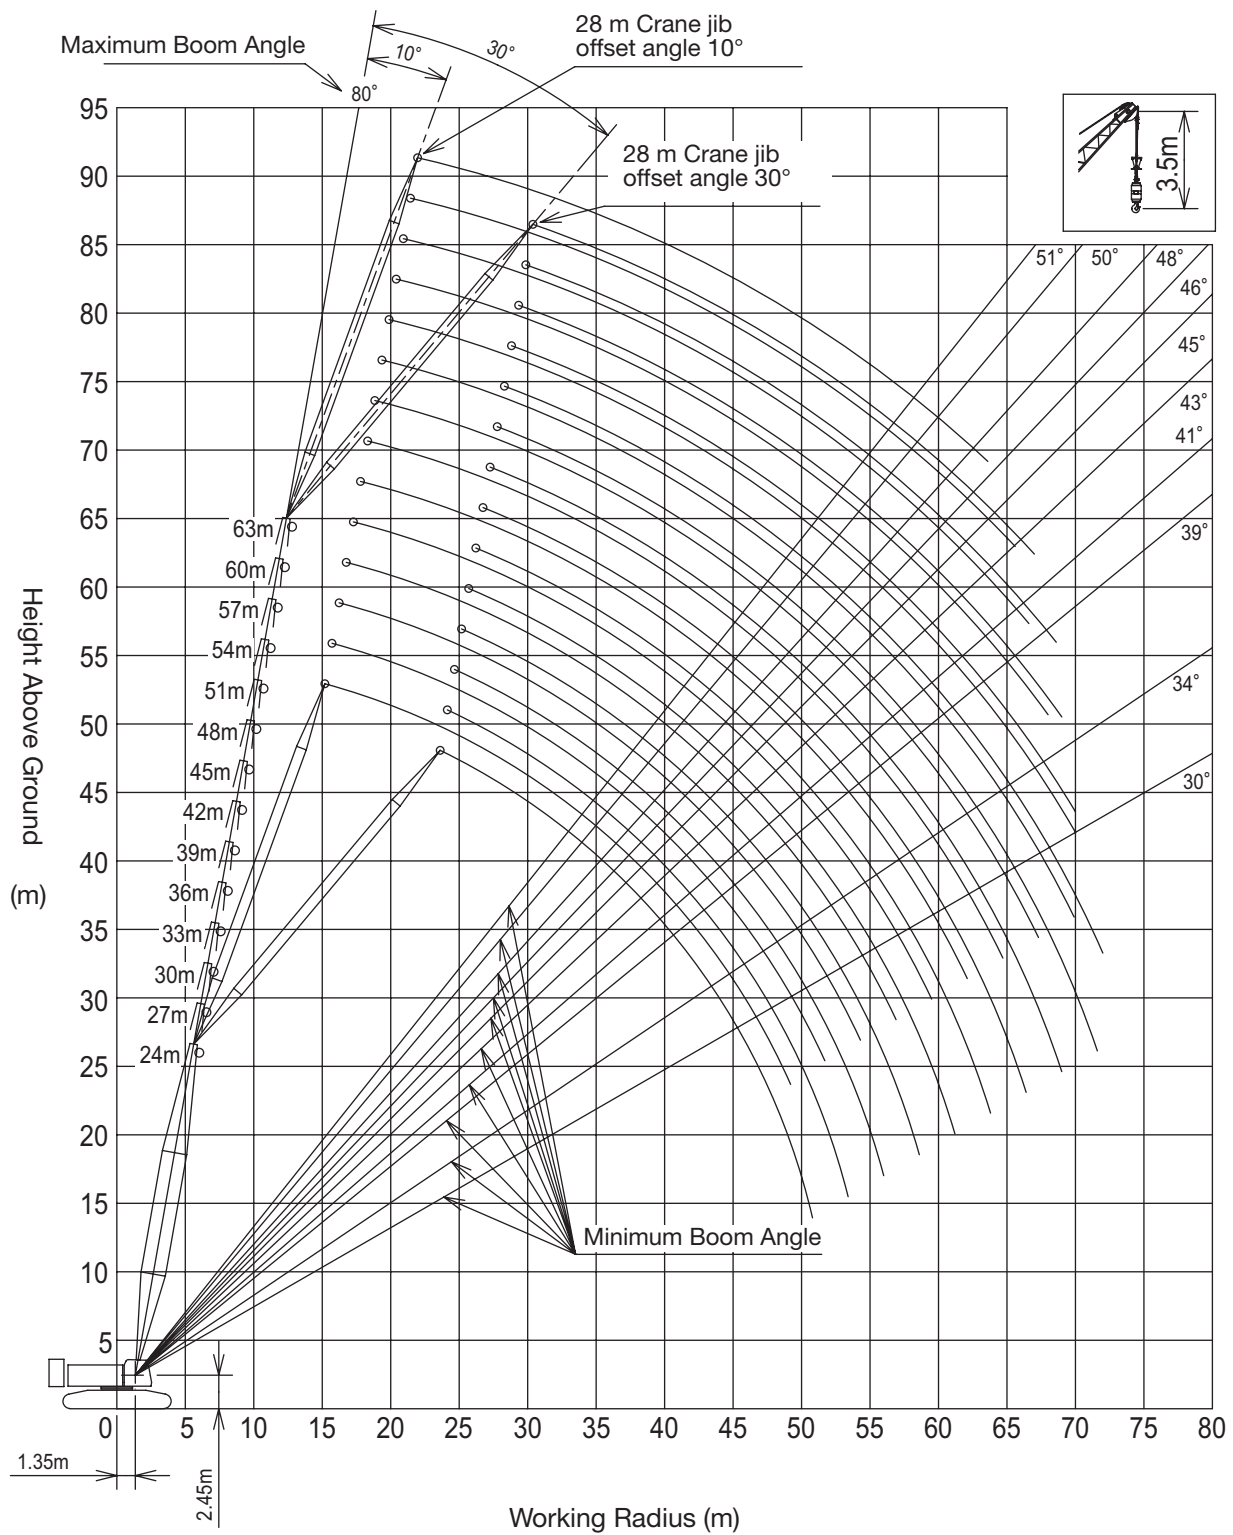
Main Boom with 28 m Crane Jib (With Crane Boom Extensions)



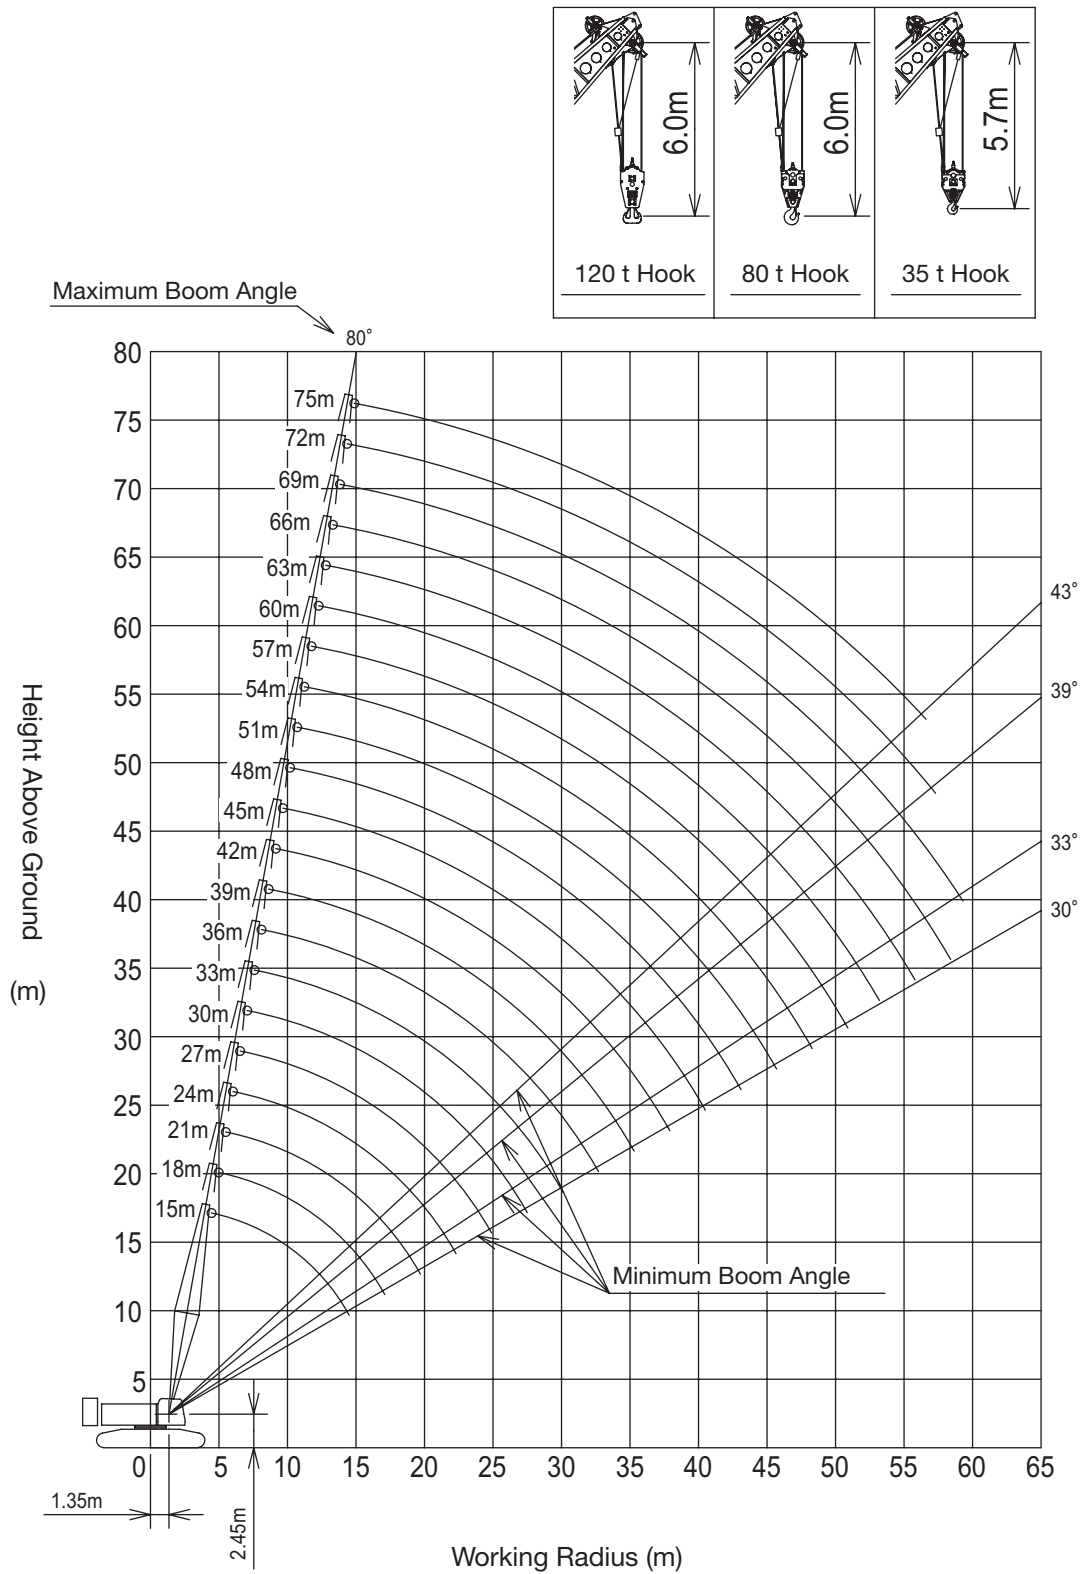
■ Main Boom (With Tower Boom Extensions)



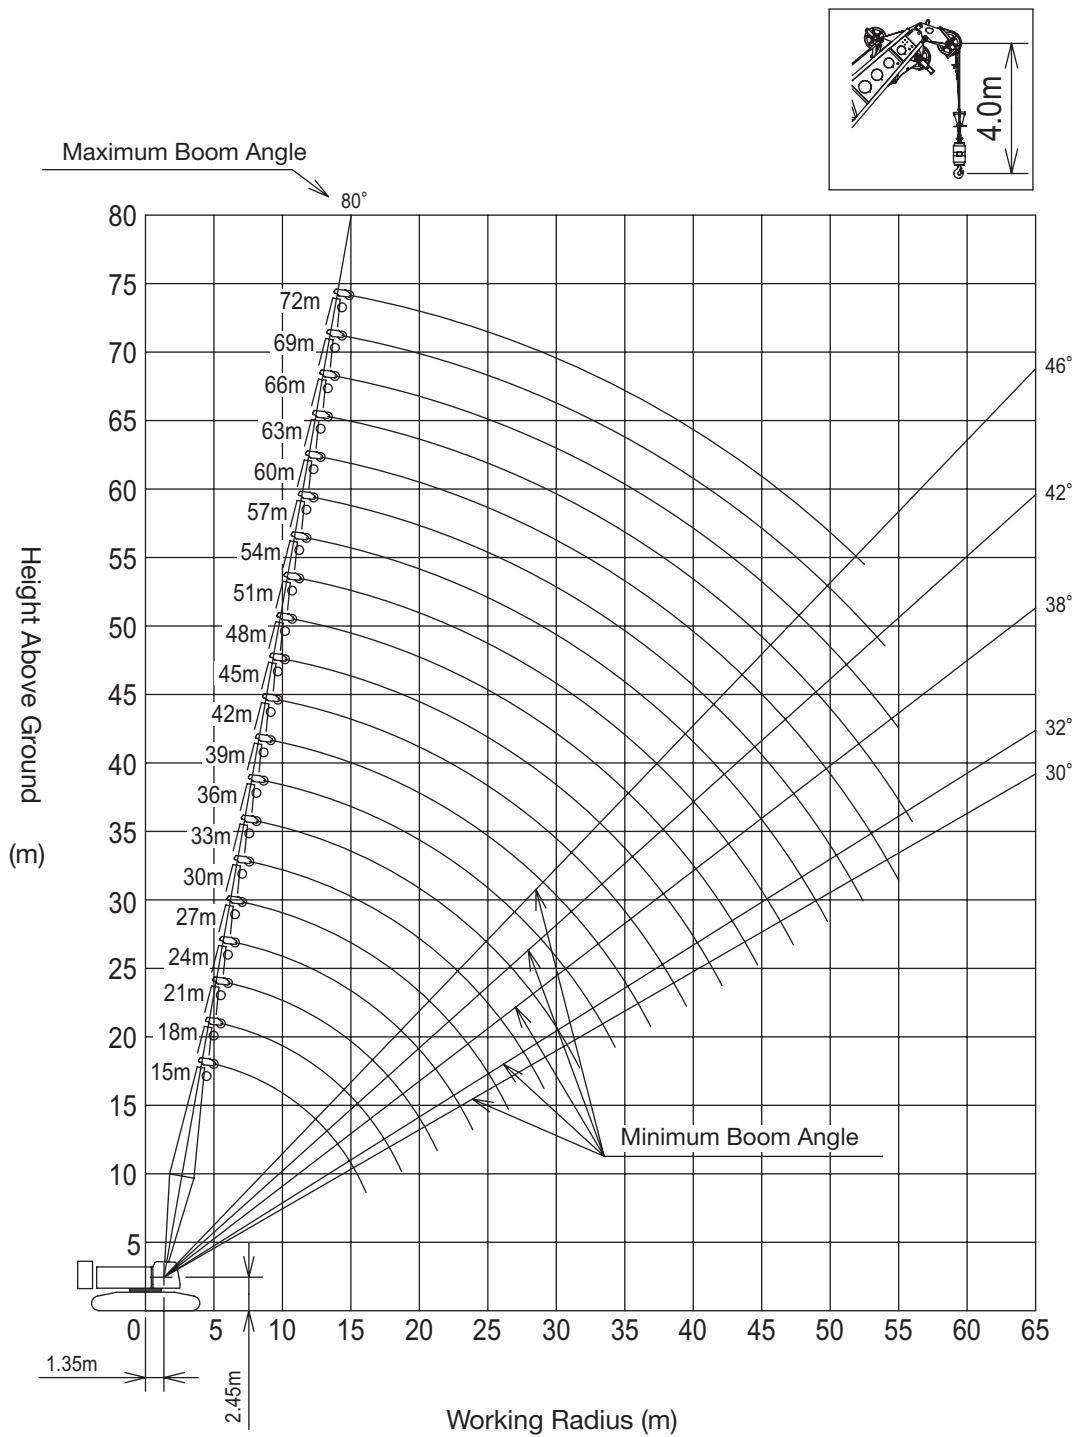■ Main Boom with Aux. Sheave (With Tower Boom Extensions)



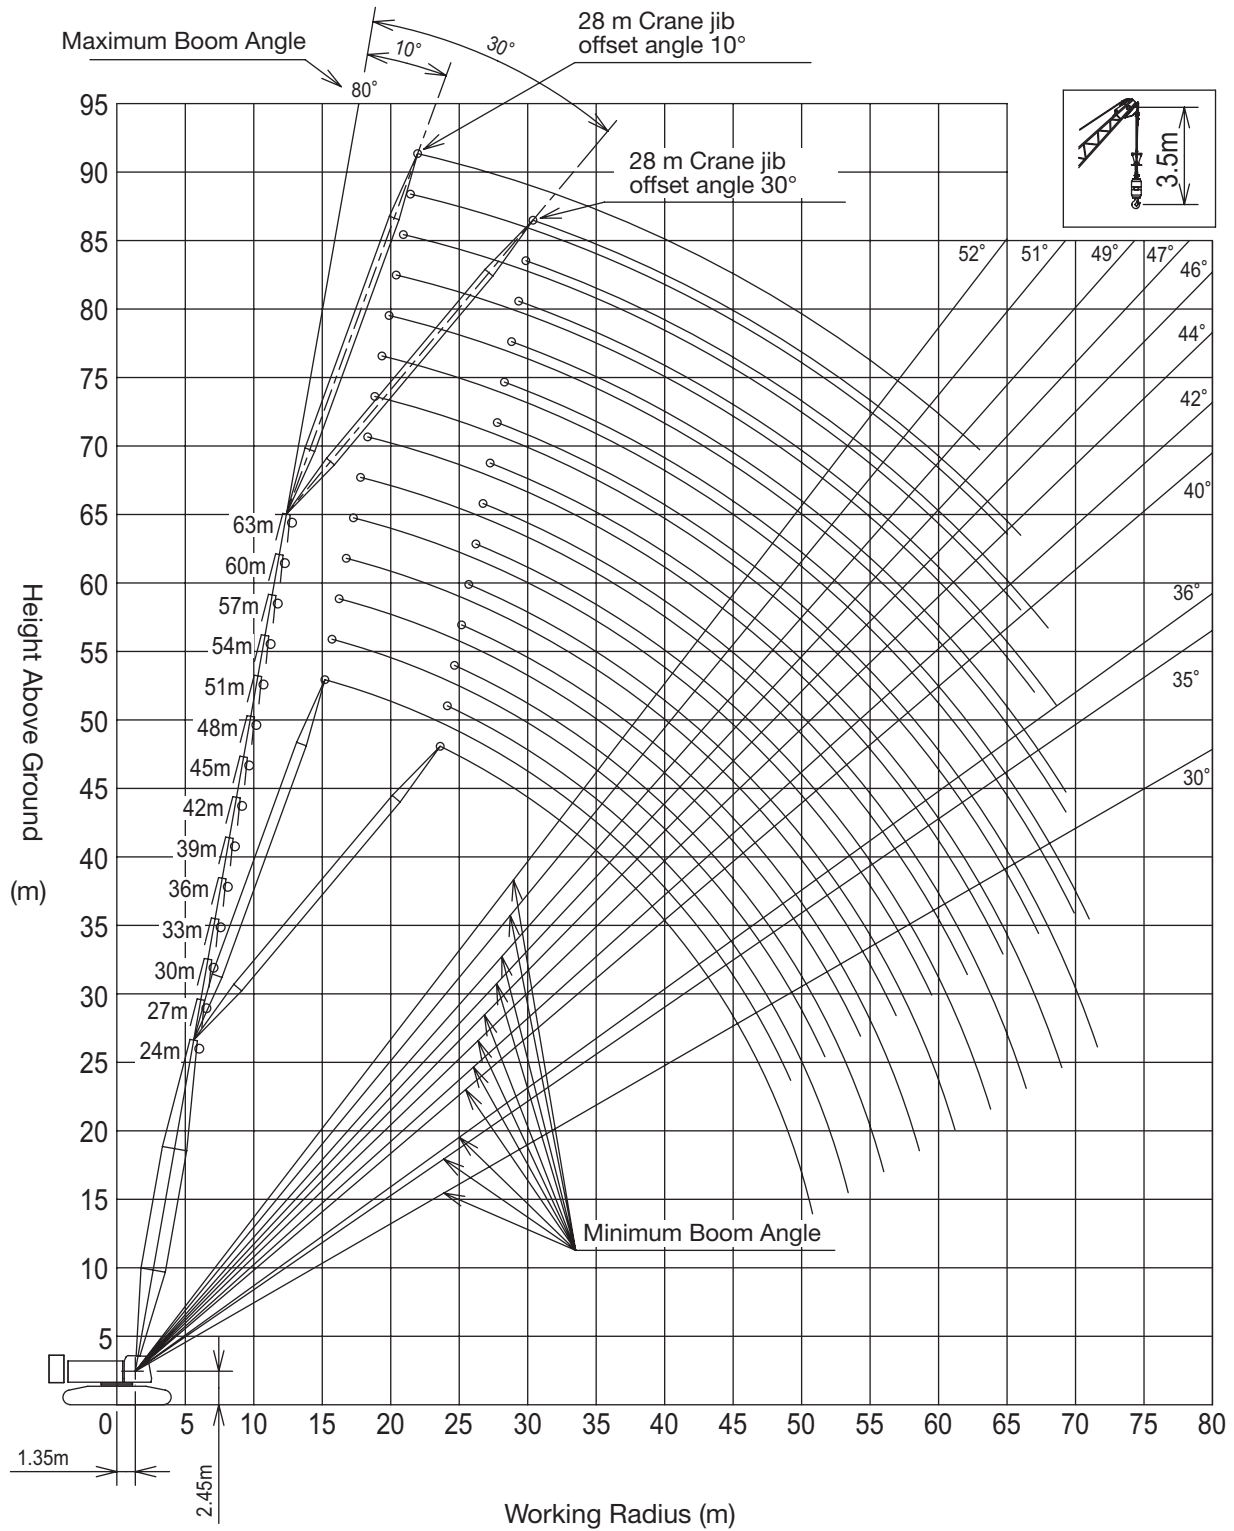■ Main Boom with 28 m Crane Jib (With Tower Boom Extensions)



Gross Rated Load Table

■ Main Boom (With Crane Boom Extensions)



Working Radius (m)	Boom length (m)											Working Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
4.6	120.0											4.6
5.0	120.0	115.8 / 5.2										5.0
5.5	109.9	109.7	105.9 / 5.7									5.5
6.0	101.1	100.9	100.7	96.0 / 6.3	84.0 / 6.8							6.0
7.0	87.0	86.8	86.7	86.6	84.0	72.0 / 7.4	72.0 / 7.9					7.0
8.0	76.3	76.1	75.9	75.9	75.7	72.0	72.0	60.0 / 8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.8	64.8	63.7	60.0	60.0	48.0 / 9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.4	55.4	55.3	54.9	53.8	48.0	48.0 / 10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.6	42.5	42.4	42.3	42.3	41.6	12.0
14.0	34.5	34.5	34.5	34.5	34.4	34.4	34.2	34.1	34.0	34.0	33.8	14.0
16.0	32.9 / 14.5	28.8	28.7	28.7	28.6	28.6	28.5	28.3	28.2	28.2	28.0	16.0
18.0		26.3 / 17.1	24.5	24.5	24.3	24.3	24.2	24.1	23.9	23.9	23.7	18.0
20.0			21.6 / 19.7	21.2	21.1	21.0	20.9	20.8	20.6	20.6	20.4	20.0
22.0				18.6	18.5	18.4	18.3	18.2	18.0	17.9	17.7	22.0
24.0				18.3 / 22.3	16.4	16.3	16.2	16.0	15.9	15.8	15.6	24.0
26.0					15.5 / 24.9	14.6	14.4	14.3	14.1	14.1	13.8	26.0
28.0						13.4 / 27.5	13.0	12.8	12.7	12.6	12.4	28.0
30.0							11.7	11.5	11.4	11.3	11.1	30.0
32.0							11.7 / 30.1	10.5	10.3	10.2	10.0	32.0
34.0								10.1 / 32.7	9.4	9.3	9.1	34.0
36.0									8.8 / 35.3	8.4	8.2	36.0
38.0										7.7 / 37.9	7.5	38.0
40.0											6.8	40.0
42.0											6.7 / 40.5	42.0

Working Radius (m)	Boom length (m)										Working Radius (m)
	48	51	54	57	60	63	66	69	72	75	
10.0	36.0 / 10.6	36.0 / 11.2	36.0 / 11.7								10.0
12.0	36.0	36.0	36.0	36.0 / 12.3	24.0 / 12.9	24.0 / 13.5					12.0
14.0	33.8	33.3	32.5	31.8	24.0	24.0	24.0	24.0 / 14.5	23.7 / 15.1	21.0 / 15.6	14.0
16.0	27.9	27.8	27.6	27.2	24.0	24.0	24.0	24.0	23.2	20.8	16.0
18.0	23.6	23.5	23.3	23.1	22.9	22.4	21.8	21.3	20.7	20.0	18.0
20.0	20.3	20.2	20.0	19.8	19.8	19.6	19.1	18.6	18.0	17.5	20.0
22.0	17.7	17.5	17.3	17.2	17.1	16.9	16.8	16.3	15.8	15.4	22.0
24.0	15.6	15.4	15.2	15.0	15.0	14.8	14.6	14.4	14.0	13.6	24.0
26.0	13.8	13.6	13.4	13.3	13.2	13.0	12.8	12.7	12.5	12.0	26.0
28.0	12.3	12.1	11.9	11.8	11.7	11.5	11.3	11.2	10.9	10.7	28.0
30.0	11.0	10.9	10.7	10.5	10.4	10.2	10.1	9.9	9.7	9.5	30.0
32.0	9.9	9.8	9.6	9.4	9.3	9.1	8.9	8.8	8.6	8.4	32.0
34.0	9.0	8.8	8.6	8.4	8.4	8.1	8.0	7.8	7.6	7.4	34.0
36.0	8.1	8.0	7.8	7.6	7.5	7.3	7.1	7.0	6.7	6.6	36.0
38.0	7.4	7.2	7.0	6.8	6.8	6.5	6.4	6.2	6.0	5.8	38.0
40.0	6.7	6.6	6.3	6.2	6.1	5.9	5.7	5.5	5.3	5.1	40.0
42.0	6.1	6.0	5.8	5.6	5.5	5.3	5.1	4.9	4.7	4.5	42.0
44.0	5.8 / 43.1	5.4	5.2	5.0	4.9	4.7	4.6	4.4	4.2	4.0	44.0
46.0		5.0 / 45.7	4.7	4.6	4.5	4.2	4.1	3.9	3.7	3.5	46.0
48.0			4.3	4.1	4.0	3.8	3.6	3.4	3.2	3.0	48.0
50.0			4.2 / 48.3	3.7	3.6	3.4	3.2	3.0	2.8	2.6	50.0
52.0				3.6 / 50.9	3.2	3.0	2.8	2.7	2.4	2.3	52.0
54.0					3.0 / 53.2	2.7	2.5	2.3	2.1	1.9	54.0
56.0						2.4 / 55.8	2.2	2.0	1.8	1.6	56.0
58.0							1.9	1.7	1.5	1.4 / 57.3	58.0
60.0							1.8 / 58.4	1.4	1.4 / 58.6		60.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.

2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.

3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.

5. The counterweight is 49.6 ton.

6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12

■ Aux. Sheave (With Crane Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
5.8	12.0											5.8
6.0	12.0	12.0 / 6.3	12.0 / 6.9									6.0
7.0	12.0	12.0	12.0	12.0 / 7.4								7.0
8.0	12.0	12.0	12.0	12.0	12.0	12.0 / 8.5						8.0
9.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 9.6				9.0
10.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 10.1	12.0 / 10.7	12.0 / 11.2	10.0
12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	16.0
18.0	12.0 / 16.1	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0		12.0 / 18.7	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0			12.0 / 21.3	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0				12.0 / 23.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0					12.0	12.0	12.0	12.0	12.0	12.0	12.0	26.0
28.0					12.0 / 26.5	12.0	12.0	12.0	12.0	12.0	12.0	28.0
30.0						12.0 / 29.1	11.5	11.4	11.2	11.1	10.9	30.0
32.0							10.6 / 31.7	10.3	10.1	10.0	9.8	32.0
34.0								9.3	9.2	9.1	8.8	34.0
36.0								9.2 / 34.3	8.3	8.2	8.0	36.0
38.0									8.0 / 36.9	7.5	7.2	38.0
40.0										7.0 / 39.5	6.6	40.0
42.0											6.0	42.0
44.0											6.0 / 42.1	44.0

Radius (m)	Boom length (m)									Unit: ton
	48	51	54	57	60	63	66	69	72	Radius (m)
10.0	12.0 / 11.8									10.0
12.0	12.0	12.0 / 12.3	12.0 / 12.9	12.0 / 13.4						12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0 / 14.5	12.0 / 15.1	12.0 / 15.6		14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 16.2	16.0
18.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.8	26.0
28.0	12.0	11.9	11.7	11.5	11.5	11.3	11.1	10.9	10.5	28.0
30.0	10.8	10.6	10.4	10.3	10.2	10.0	9.8	9.6	9.3	30.0
32.0	9.7	9.5	9.3	9.1	9.1	8.9	8.7	8.5	8.3	32.0
34.0	8.7	8.6	8.4	8.2	8.1	7.9	7.7	7.5	7.3	34.0
36.0	7.9	7.7	7.5	7.3	7.3	7.0	6.9	6.7	6.5	36.0
38.0	7.1	7.0	6.8	6.6	6.5	6.3	6.1	5.9	5.7	38.0
40.0	6.5	6.3	6.1	5.9	5.8	5.6	5.4	5.2	5.0	40.0
42.0	5.9	5.7	5.5	5.3	5.2	5.0	4.8	4.6	4.4	42.0
44.0	5.3	5.2	4.9	4.8	4.7	4.5	4.3	4.1	3.9	44.0
46.0	5.2 / 44.7	4.7	4.5	4.3	4.2	4.0	3.8	3.6	3.4	46.0
48.0		4.4 / 47.3	4.0	3.8	3.7	3.5	3.3	3.1	2.9	48.0
50.0			3.6 / 49.8	3.4	3.3	3.1	2.9	2.7	2.5	50.0
52.0				3.1	2.9	2.7	2.5	2.3	2.1	52.0
54.0				3.0 / 52.4	2.6	2.4	2.2	2.0	1.9 / 53.3	54.0
56.0					2.4 / 55.0	2.1	1.9	1.9 / 54.6		56.0
58.0						1.9 / 57.0				58.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.

Main Boom with Aux. Sheave (With Crane Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
4.6	120.0											4.6
5.0	119.5	114.9 / 5.2										5.0
5.5	109.1	108.9	105.0 / 5.7									5.5
6.0	100.2	100.0	99.9	95.1 / 6.3	84.0 / 6.8							6.0
7.0	86.2	86.0	85.8	85.7	84.0	72.0 / 7.4	72.0 / 7.9					7.0
8.0	75.4	75.2	75.1	75.0	74.8	72.0	72.0	60.0 / 8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	64.3	63.1	60.0	60.0	48.0 / 9.6		9.0
10.0	55.0	55.1	55.0	55.0	55.0	54.9	54.8	54.2	53.1	48.0	48.0 / 10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.2	42.1	42.0	41.9	41.8	40.9	12.0
14.0	34.2	34.2	34.1	34.1	34.0	34.0	33.8	33.7	33.6	33.5	33.3	14.0
16.0	32.6 / 14.5	28.4	28.4	28.4	28.2	28.2	28.1	27.9	27.8	27.7	27.5	16.0
18.0		26.0 / 17.1	24.1	24.1	24.0	23.9	23.8	23.7	23.5	23.4	23.2	18.0
20.0			21.3 / 19.7	20.8	20.7	20.6	20.5	20.4	20.2	20.1	19.9	20.0
22.0				18.3	18.1	18.1	17.9	17.8	17.6	17.5	17.3	22.0
24.0				17.9 / 22.3	16.0	15.9	15.8	15.6	15.5	15.4	15.2	24.0
26.0					15.2 / 24.9	14.2	14.1	13.9	13.7	13.7	13.4	26.0
28.0						13.1 / 27.5	12.6	12.4	12.3	12.2	12.0	28.0
30.0							11.4	11.2	11.0	10.9	10.7	30.0
32.0							11.3 / 30.1	10.1	10.0	9.8	9.6	32.0
34.0								9.8 / 32.7	9.0	8.9	8.7	34.0
36.0									8.5 / 35.3	8.1	7.8	36.0
38.0										7.4 / 37.9	7.1	38.0
40.0											6.5	40.0
42.0											6.3 / 40.5	42.0

Radius (m)	Boom length (m)									Unit: ton Radius (m)
	48	51	54	57	60	63	66	69	72	
10.0	36.0 / 10.6	36.0 / 11.2	36.0 / 11.7							10.0
12.0	36.0	36.0	36.0	36.0 / 12.3	24.0 / 12.9	24.0 / 13.5				12.0
14.0	33.3	32.6	31.8	31.1	24.0	24.0	24.0	24.0 / 14.5	22.5 / 15.1	14.0
16.0	27.5	27.3	27.1	26.5	24.0	24.0	24.0	23.9	22.1	16.0
18.0	23.2	23.0	22.8	22.6	22.2	21.7	21.1	20.5	19.9	18.0
20.0	19.9	19.7	19.5	19.3	19.3	18.8	18.3	17.8	17.3	20.0
22.0	17.3	17.1	16.9	16.7	16.7	16.4	16.1	15.6	15.1	22.0
24.0	15.1	15.0	14.7	14.6	14.5	14.3	14.1	13.7	13.3	24.0
26.0	13.4	13.2	13.0	12.8	12.7	12.5	12.3	12.2	11.7	26.0
28.0	11.9	11.7	11.5	11.3	11.2	11.0	10.8	10.7	10.4	28.0
30.0	10.6	10.4	10.2	10.0	10.0	9.7	9.6	9.4	9.2	30.0
32.0	9.5	9.4	9.1	8.9	8.9	8.6	8.5	8.3	8.1	32.0
34.0	8.6	8.4	8.2	8.0	7.9	7.7	7.5	7.3	7.1	34.0
36.0	7.7	7.6	7.3	7.2	7.1	6.8	6.7	6.5	6.2	36.0
38.0	7.0	6.8	6.6	6.4	6.3	6.1	5.9	5.7	5.5	38.0
40.0	6.4	6.2	5.9	5.8	5.7	5.4	5.2	5.1	4.8	40.0
42.0	5.8	5.6	5.4	5.2	5.1	4.8	4.6	4.5	4.2	42.0
44.0	5.5 / 43.1	5.1	4.8	4.6	4.5	4.3	4.1	3.9	3.7	44.0
46.0		4.7 / 45.7	4.3	4.2	4.0	3.8	3.6	3.4	3.2	46.0
48.0			3.9	3.7	3.6	3.4	3.2	3.0	2.8	48.0
50.0			3.9 / 48.3	3.3	3.2	3.0	2.8	2.6	2.3	50.0
52.0				3.2 / 50.9	2.8	2.6	2.4	2.2	2.0	52.0
54.0					2.6 / 53.2	2.2	2.1	1.9	1.9 / 52.5	54.0
56.0						2.0 / 55.8	1.9 / 55.3			56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.

2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.

3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.

5. The counterweight is 49.6 ton.

6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)										
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls	
120	1.64	120	108	96	84	72	60	48	36	24		
80	1.35				80	72	60	48	36	24		
35	0.90								35	24		
12	0.51										12	

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	24							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
9.7	12.0							
10.0	12.0		12.0 / 11.8					
12.0	12.0	12.0 / 12.6	12.0		8.8 / 13.9			
14.0	12.0	12.0	12.0		8.8			
16.0	12.0	12.0	12.0	9.0 / 16.5	8.8		5.4	
18.0	12.0	12.0	12.0	9.0	8.6		5.1	
20.0	12.0	12.0	12.0	9.0	8.3	6.4 / 20.4	4.8	
22.0	12.0	11.7	12.0	9.0	7.9	6.4	4.5	
24.0	12.0	11.2	12.0	9.0	7.6	6.4	4.3	3.4 / 24.3
26.0	12.0	10.8	12.0	8.7	7.3	6.4	4.1	3.4
28.0	12.0	10.4	11.9	8.3	7.0	6.4	3.9	3.3
30.0	12.0	10.2	11.1	8.0	6.8	6.2	3.7	3.1
32.0	11.4	10.0	10.4	7.7	6.6	5.9	3.6	3.0
34.0	11.3 / 32.2	9.9 / 32.8	9.8	7.5	6.4	5.7	3.4	2.9
36.0			9.3	7.3	6.2	5.4	3.3	2.9
38.0			8.9 / 37.9	7.2	6.1	5.3	3.2	2.8
40.0				7.2 / 38.8	5.9	5.1	3.1	2.7
42.0					5.8	5.0	3.0	2.7
44.0					5.8 / 43.5	4.9	2.9	2.6
46.0						4.9 / 44.8	2.8	2.6
48.0							2.7	2.6
50.0							2.7 / 49.2	2.6
52.0								2.6 / 50.8

Unit: ton								
Boom length (m)	27							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.0	12.0 / 10.2							
12.0	12.0	12.0 / 13.2	12.0 / 12.3					
14.0	12.0	12.0	12.0		8.8 / 14.4			
16.0	12.0	12.0	12.0	9.0 / 17.1	8.8		5.4 / 16.5	
18.0	12.0	12.0	12.0	9.0	8.8		5.2	
20.0	12.0	12.0	12.0	9.0	8.4	6.4 / 21.0	4.9	
22.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	
24.0	12.0	11.5	12.0	9.0	7.8	6.4	4.4	3.4 / 24.9
26.0	12.0	11.1	12.0	8.9	7.5	6.4	4.2	3.4
28.0	12.0	10.7	12.0	8.5	7.2	6.4	4.0	3.3
30.0	12.0	10.4	11.8	8.2	7.0	6.3	3.8	3.2
32.0	11.2	10.2	11.1	7.9	6.7	6.1	3.7	3.1
34.0	10.2	10.0	10.4		6.5	5.8	3.5	3.0
36.0	9.9 / 34.8	9.7 / 35.4	9.8	7.5	6.4	5.6	3.4	2.9
38.0			9.0	7.3	6.2	5.4	3.3	2.8
40.0			8.3	7.2	6.1	5.2	3.2	2.8
42.0			8.2 / 40.5	7.2 / 41.4	5.9	5.1	3.1	2.7
44.0					5.9	5.0	3.0	2.7
46.0					5.8	4.9	2.9	2.6
48.0					5.8 / 46.1	4.8 / 47.4	2.8	2.6
50.0							2.8	2.6
52.0							2.7 / 51.7	2.6
54.0								2.6 / 53.4

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.

■ Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	30								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
10.7	12.0								10.7
12.0	12.0	12.0 / 13.7	12.0 / 12.8						12.0
14.0	12.0	12.0	12.0		8.8 / 15.0				14.0
16.0	12.0	12.0	12.0	9.0 / 17.6	8.8		5.4 / 17.1		16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2		18.0
20.0	12.0	12.0	12.0	9.0	8.6	6.4 / 21.5	5.0		20.0
22.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7		22.0
24.0	12.0	11.8	12.0	9.0	7.9	6.4	4.5	3.4 / 25.4	24.0
26.0	12.0	11.4	12.0	9.0	7.6	6.4	4.3	3.4	26.0
28.0	12.0	11.0	12.0	8.7	7.4	6.4	4.1	3.3	28.0
30.0	12.0	10.7	12.0	8.4	7.1	6.4	3.9	3.2	30.0
32.0	11.1	10.4	11.4	8.1	6.9	6.2	3.8	3.1	32.0
34.0	10.1	10.2	10.5	7.9	6.7	6.0	3.6	3.0	34.0
36.0	9.3	9.4	9.6	7.7	6.5	5.8	3.5	2.9	36.0
38.0	8.7 / 37.4	8.6	8.8	7.5	6.3	5.6	3.4	2.9	38.0
40.0			8.2	7.3	6.2	5.4	3.2	2.8	40.0
42.0			7.6	7.2	6.1	5.2	3.1	2.7	42.0
44.0			7.3 / 43.1	7.1	6.0	5.1	3.0	2.7	44.0
46.0					5.9	5.0	3.0	2.7	46.0
48.0					5.8	4.9	2.9	2.6	48.0
50.0					5.8 / 48.7	4.8	2.8	2.6	50.0
52.0							2.8	2.6	52.0
54.0							2.7	2.6	54.0
56.0							2.7 / 54.3	2.6	56.0

Unit: ton

Boom length (m)	33								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
10.7	12.0 / 11.3								10.7
12.0	12.0		12.0 / 13.4						12.0
14.0	12.0	12.0 / 14.3	12.0		8.8 / 15.5				14.0
16.0	12.0	12.0	12.0		8.8		5.4 / 17.6		16.0
18.0	12.0	12.0	12.0	9.0 / 18.2	8.8		5.3		18.0
20.0	12.0	12.0	12.0	9.0	8.7		5.0		20.0
22.0	12.0	12.0	12.0	9.0	8.4	6.4 / 22.1	4.8		22.0
24.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6		24.0
26.0	12.0	11.7	12.0	9.0	7.8	6.4	4.4	3.4	26.0
28.0	12.0	11.3	12.0	8.9	7.5	6.4	4.2	3.4	28.0
30.0	12.0	11.0	12.0	8.6	7.3	6.4	4.0	3.2	30.0
32.0	10.9	10.7	11.3	8.3	7.0	6.4	3.9	3.1	32.0
34.0	9.9	10.1	10.3	8.1	6.8	6.1	3.7	3.1	34.0
36.0	9.1	9.2	9.4	7.9	6.7	5.9	3.6	3.0	36.0
38.0	8.3	8.4	8.7	7.7	6.5	5.7	3.5	2.9	38.0
40.0	7.7	7.7	8.0	7.5	6.3	5.5	3.3	2.8	40.0
42.0		7.5 / 40.6	7.4	7.3	6.2	5.3	3.2	2.8	42.0
44.0			6.8	7.0	6.1	5.2	3.1	2.7	44.0
46.0			6.4 / 45.7	6.4	6.0	5.1	3.0	2.7	46.0
48.0				6.3 / 46.6	5.9	5.0	3.0	2.7	48.0
50.0					5.7	4.9	2.9	2.6	50.0
52.0					5.4 / 51.3	4.8	2.8	2.6	52.0
54.0						4.8 / 52.6	2.8	2.6	54.0
56.0							2.7	2.6	56.0
58.0							2.7 / 56.9	2.6	58.0
60.0								2.6 / 58.6	60.0

■ Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	36								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
11.8	12.0								11.8
12.0	12.0		12.0 / 13.9						12.0
14.0	12.0	12.0 / 14.8	12.0						14.0
16.0	12.0	12.0	12.0		8.8				16.0
18.0	12.0	12.0	12.0	9.0 / 18.7	8.8		5.4 / 18.1		18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.1		20.0
22.0	12.0	12.0	12.0	9.0	8.5	6.4 / 22.6	4.9		22.0
24.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7		24.0
26.0	12.0	11.9	12.0	9.0	7.9	6.4	4.5	3.4 / 26.5	26.0
28.0	12.0	11.5	12.0	9.0	7.7	6.4	4.3	3.4	28.0
30.0	11.8	11.2	12.0	8.8	7.4	6.4	4.1	3.3	30.0
32.0	10.7	10.9	11.1	8.5	7.2	6.4	4.0	3.2	32.0
34.0	9.7	10.0	10.1	8.3	7.0	6.2	3.8	3.1	34.0
36.0	8.9	9.1	9.2	8.0	6.8	6.0	3.7	3.0	36.0
38.0	8.1	8.3	8.5	7.8	6.6	5.8	3.5	2.9	38.0
40.0	7.5	7.6	7.8	7.6	6.5	5.6	3.4	2.9	40.0
42.0	6.9	6.9	7.2	7.4	6.3	5.5	3.3	2.8	42.0
44.0	6.7 / 42.6	6.6 / 43.2	6.6	6.8	6.2	5.3	3.2	2.8	44.0
46.0			6.1	6.3	6.1	5.2	3.1	2.7	46.0
48.0			5.7	5.8	5.9	5.1	3.0	2.7	48.0
50.0			5.6 / 48.3	5.5 / 49.2	5.5	5.0	3.0	2.6	50.0
52.0					5.1	4.9	2.9	2.6	52.0
54.0					4.8 / 53.9	4.8	2.8	2.6	54.0
56.0						4.6 / 55.2	2.8	2.6	56.0
58.0							2.7	2.6	58.0
60.0							2.7 / 59.5	2.6	60.0
62.0								2.6 / 61.2	62.0

Unit: ton

Boom length (m)	39								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
12.0	12.0 / 12.4								12.0
14.0	12.0	12.0 / 15.4	12.0 / 14.5						14.0
16.0	12.0	12.0	12.0		8.8 / 16.6				16.0
18.0	12.0	12.0	12.0	9.0 / 19.3	8.8		5.3 / 18.7		18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.2		20.0
22.0	12.0	12.0	12.0	9.0	8.6	6.4 / 23.2	5.0		22.0
24.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7		24.0
26.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 / 27.1	26.0
28.0	12.0	11.8	12.0	9.0	7.8	6.4	4.4	3.4	28.0
30.0	11.6	11.4	12.0	8.9	7.6	6.4	4.2	3.3	30.0
32.0	10.5	10.8	10.9	8.7	7.3	6.4	4.0	3.2	32.0
34.0	9.6	9.8	9.9	8.4	7.1	6.4	3.9	3.1	34.0
36.0	8.7	8.9	9.1	8.2	6.9	6.1	3.8	3.0	36.0
38.0	8.0	8.1	8.3	8.0	6.8	5.9	3.6	3.0	38.0
40.0	7.3	7.4	7.6	7.8	6.6	5.8	3.5	2.9	40.0
42.0	6.7	6.8	7.0	7.3	6.4	5.6	3.4	2.8	42.0
44.0	6.1	6.2	6.5	6.7	6.3	5.4	3.3	2.8	44.0
46.0	5.8 / 45.2	5.7 / 45.8	6.0	6.1	6.2	5.3	3.2	2.7	46.0
48.0			5.5	5.6	5.7	5.2	3.1	2.7	48.0
50.0			5.1	5.2	5.3	5.1	3.0	2.7	50.0
52.0			4.9 / 50.9	4.8 / 51.8	4.9	5.0	3.0	2.6	52.0
54.0					4.6	4.7	2.9	2.6	54.0
56.0					4.2	4.4	2.8	2.6	56.0
58.0					4.2 / 56.5	4.1 / 57.8	2.8	2.6	58.0
60.0							2.7	2.6	60.0
62.0							2.7	2.6	62.0
64.0							2.7 / 62.1	2.6 / 63.8	64.0

■ Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	42								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
12.9	12.0								12.9
14.0	12.0	12.0 / 15.9	12.0 / 15.0						14.0
16.0	12.0	12.0	12.0		8.8 / 17.1				16.0
18.0	12.0	12.0	12.0	9.0 / 19.8	8.8		5.3 / 19.2		18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.2		20.0
22.0	12.0	12.0	12.0	9.0	8.7	6.4 / 23.7	5.0		22.0
24.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8		24.0
26.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 27.6	26.0
28.0	12.0	12.0	12.0	9.0	7.9	6.4	4.4	3.4	28.0
30.0	11.5	11.6	11.9	9.0	7.7	6.4	4.3	3.3	30.0
32.0	10.4	10.7	10.8	8.8	7.5	6.4	4.1	3.2	32.0
34.0	9.4	9.7	9.8	8.6	7.3	6.4	4.0	3.1	34.0
36.0	8.6	8.8	8.9	8.3	7.1	6.3	3.8	3.1	36.0
38.0	7.8	8.0	8.2	8.1	6.9	6.1	3.7	3.0	38.0
40.0	7.2	7.3	7.5	7.8	6.7	5.9	3.6	2.9	40.0
42.0	6.5	6.7	6.9	7.2	6.6	5.7	3.5	2.9	42.0
44.0	6.0	6.1	6.3	6.6	6.4	5.5	3.4	2.8	44.0
46.0	5.5	5.6	5.8	6.0	6.0	5.4	3.3	2.8	46.0
48.0	5.1 / 47.8	5.1	5.4	5.5	5.6	5.3	3.2	2.7	48.0
50.0		5.0 / 48.4	4.9	5.1	5.2	5.2	3.1	2.7	50.0
52.0			4.6	4.7	4.8	5.0	3.0	2.6	52.0
54.0			4.3 / 53.5	4.3	4.4	4.6	2.9	2.6	54.0
56.0				4.2 / 54.4	4.1	4.3	2.9	2.6	56.0
58.0					3.8	3.9	2.8	2.6	58.0
60.0					3.6 / 59.1	3.6	2.8	2.6	60.0
62.0						3.5 / 60.4	2.7	2.6	62.0
64.0							2.7	2.6	64.0
66.0							2.7 / 64.7	2.6	66.0
68.0								2.6 / 66.4	68.0

Unit: ton

Boom length (m)	45								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
12.9	12.0 / 13.5								12.9
14.0	12.0		12.0 / 15.6						14.0
16.0	12.0	12.0 / 16.5	12.0		8.8 / 17.7				16.0
18.0	12.0	12.0	12.0		8.8		5.3 / 19.8		18.0
20.0	12.0	12.0	12.0	9.0 / 20.4	8.8		5.3		20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.1		22.0
24.0	12.0	12.0	12.0	9.0	8.5	6.4 / 24.3	4.9		24.0
26.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7		26.0
28.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 / 28.2	28.0
30.0	11.3	11.7	11.7	9.0	7.8	6.4	4.3	3.3	30.0
32.0	10.2	10.5	10.6	9.0	7.6	6.4	4.2	3.3	32.0
34.0	9.2	9.5	9.6	8.7	7.4	6.4	4.0	3.2	34.0
36.0	8.4	8.6	8.7	8.5	7.2	6.4	3.9	3.1	36.0
38.0	7.6	7.8	7.9	8.3	7.0	6.2	3.8	3.0	38.0
40.0	6.9	7.1	7.3	7.6	6.8	6.0	3.7	3.0	40.0
42.0	6.3	6.5	6.6	7.0	6.7	5.8	3.5	2.9	42.0
44.0	5.8	5.9	6.1	6.4	6.3	5.7	3.4	2.8	44.0
46.0	5.3	5.4	5.6	5.8	5.8	5.5	3.3	2.8	46.0
48.0	4.8	4.9	5.1	5.3	5.4	5.4	3.3	2.7	48.0
50.0	4.4	4.5	4.7	4.9	4.9	5.3	3.2	2.7	50.0
52.0	4.3 / 50.4	4.3 / 51.0	4.3	4.5	4.6	4.8	3.1	2.7	52.0
54.0			4.0	4.1	4.2	4.5	3.0	2.6	54.0
56.0			3.6	3.7	3.9	4.1	2.9	2.6	56.0
58.0			3.6 / 56.1	3.6 / 57.0	3.6	3.7	2.9	2.6	58.0
60.0					3.3	3.4	2.8	2.6	60.0
62.0					3.1 / 61.7	3.1	2.8	2.6	62.0
64.0						3.0 / 63.0	2.7	2.6	64.0
66.0							2.7	2.6	66.0
68.0							2.6 / 67.3	2.6	68.0
70.0								2.5 / 69.0	70.0

■ Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	48								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
14.0	12.0								14.0
16.0	12.0	12.0 / 17.0	12.0 / 16.1						16.0
18.0	12.0	12.0	12.0		8.8 / 18.2				18.0
20.0	12.0	12.0	12.0	9.0 / 20.9	8.8		5.3 / 20.3		20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.1		22.0
24.0	12.0	12.0	12.0	9.0	8.6	6.4 / 24.8	4.9		24.0
26.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8		26.0
28.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	3.4 / 28.7	28.0
30.0	11.2	11.6	11.6	9.0	7.9	6.4	4.4	3.4	30.0
32.0	10.1	10.4	10.5	9.0	7.7	6.4	4.3	3.3	32.0
34.0	9.1	9.4	9.5	8.8	7.5	6.4	4.1	3.2	34.0
36.0	8.2	8.5	8.6	8.6	7.3	6.4	4.0	3.1	36.0
38.0	7.5	7.7	7.8	8.3	7.1	6.3	3.9	3.1	38.0
40.0	6.8	7.0	7.1	7.5	7.0	6.1	3.7	3.0	40.0
42.0	6.2	6.4	6.5	6.9	6.8	5.9	3.6	2.9	42.0
44.0	5.6	5.8	6.0	6.3	6.2	5.8	3.5	2.9	44.0
46.0	5.1	5.3	5.5	5.7	5.7	5.6	3.4	2.8	46.0
48.0	4.7	4.8	5.0	5.3	5.2	5.5	3.3	2.8	48.0
50.0	4.3	4.4	4.6	4.8	4.8	5.2	3.2	2.7	50.0
52.0	3.9	4.0	4.2	4.4	4.4	4.8	3.2	2.7	52.0
54.0	3.7 / 53.0	3.7 / 53.6	3.8	4.0	4.1	4.4	3.1	2.7	54.0
56.0			3.5	3.6	3.7	4.0	3.0	2.6	56.0
58.0			3.2	3.3	3.4	3.6	2.9	2.6	58.0
60.0			3.1 / 58.7	3.0 / 59.6	3.1	3.3	2.9	2.6	60.0
62.0					2.9	3.0	2.8	2.6	62.0
64.0					2.6	2.7	2.8	2.6	64.0
66.0					2.6 / 64.3	2.5 / 65.6	2.5	2.6	66.0
68.0							2.3	2.5	68.0
70.0							2.1 / 69.9	2.3	70.0
72.0								2.1 / 71.6	72.0

Unit: ton

Boom length (m)	51								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
14.0	12.0 / 14.6								14.0
16.0	12.0	12.0 / 17.6	12.0 / 16.7						16.0
18.0	12.0	12.0	12.0		8.8 / 18.8				18.0
20.0	12.0	12.0	12.0	9.0 / 21.5	8.8		5.3 / 20.9		20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.2		22.0
24.0	12.0	12.0	12.0	9.0	8.7	6.4 / 25.4	5.0		24.0
26.0	12.0	12.0	12.0	9.0	8.5	6.4	4.8		26.0
28.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 29.3	28.0
30.0	11.0	11.5	11.4	9.0	8.0	6.4	4.5	3.4	30.0
32.0	9.9	10.3	10.3	9.0	7.8	6.4	4.3	3.3	32.0
34.0	8.9	9.3	9.3	9.0	7.6	6.4	4.2	3.2	34.0
36.0	8.1	8.4	8.4	8.7	7.4	6.4	4.0	3.1	36.0
38.0	7.3	7.6	7.6	8.1	7.2	6.4	3.9	3.1	38.0
40.0	6.6	6.9	7.0	7.4	7.1	6.2	3.8	3.0	40.0
42.0	6.0	6.2	6.3	6.7	6.6	6.0	3.7	2.9	42.0
44.0	5.5	5.6	5.8	6.1	6.0	5.9	3.6	2.9	44.0
46.0	5.0	5.1	5.3	5.6	5.5	5.7	3.5	2.8	46.0
48.0	4.5	4.6	4.8	5.1	5.1	5.5	3.4	2.8	48.0
50.0	4.1	4.2	4.4	4.6	4.6	5.0	3.3	2.7	50.0
52.0	3.7	3.8	4.0	4.2	4.2	4.6	3.2	2.7	52.0
54.0	3.4	3.4	3.6	3.8	3.9	4.2	3.1	2.7	54.0
56.0	3.1 / 55.6	3.1	3.3	3.5	3.5	3.8	3.1	2.6	56.0
58.0		3.1 / 56.2	3.0	3.1	3.2	3.5	3.0	2.6	58.0
60.0			2.7	2.8	2.9	3.2	2.9	2.6	60.0
62.0			2.6 / 61.3	2.5	2.7	2.9	2.9	2.6	62.0
64.0				2.5 / 62.2	2.4	2.6	2.6	2.6	64.0
66.0					2.2	2.3	2.4	2.6	66.0
68.0					2.1 / 66.9	2.1	2.1	2.4	68.0
70.0						2.0 / 68.2	1.9	2.1	70.0
72.0								1.9	72.0

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0							
16.0	12.0		12.0 / 17.2					
18.0	12.0	12.0 / 18.1	12.0		8.8 / 19.3			
20.0	12.0	12.0	12.0		8.8		5.3 / 21.4	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.8	6.4 / 25.9	5.0	
26.0	12.0	12.0	12.0	9.0	8.6	6.4	4.9	
28.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	3.4 / 29.8
30.0	10.8	11.3	11.2	9.0	8.1	6.4	4.5	3.4
32.0	9.7	10.1	10.1	9.0	7.9	6.4	4.4	3.3
34.0	8.7	9.1	9.1	9.0	7.7	6.4	4.2	3.2
36.0	7.8	8.2	8.2	8.8	7.5	6.4	4.1	3.2
38.0	7.1	7.4	7.4	7.9	7.3	6.4	4.0	3.1
40.0	6.4	6.7	6.7	7.2	7.0	6.3	3.9	3.0
42.0	5.8	6.0	6.1	6.5	6.4	6.1	3.8	3.0
44.0	5.2	5.4	5.6	5.9	5.8	5.9	3.6	2.9
46.0	4.7	4.9	5.0	5.4	5.3	5.8	3.5	2.9
48.0	4.3	4.4	4.6	4.9	4.8	5.3	3.5	2.8
50.0	3.9	4.0	4.2	4.4	4.4	4.9	3.4	2.8
52.0	3.5	3.6	3.8	4.0	4.0	4.4	3.3	2.7
54.0	3.1	3.2	3.4	3.6	3.7	4.0	3.2	2.7
56.0	2.8	2.9	3.1	3.3	3.3	3.7	3.1	2.7
58.0	2.5	2.6	2.8	2.9	3.0	3.3	3.1	2.6
60.0	2.5 / 58.2	2.4 / 58.8	2.5	2.6	2.7	3.0	2.9	2.6
62.0			2.2	2.3	2.5	2.7	2.6	2.6
64.0			2.0 / 63.9	2.1	2.2	2.4	2.4	2.6
66.0				2.0 / 64.8	2.0	2.1	2.1	2.4
68.0					1.9 / 67.0	1.9	1.9	2.2
70.0							1.9	2.0

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0 / 15.7							
16.0	12.0		12.0 / 17.8					
18.0	12.0	12.0 / 18.7	12.0		8.8 / 19.9			
20.0	12.0	12.0	12.0		8.8			
22.0	12.0	12.0	12.0	9.0 / 22.6	8.8		5.3	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.7	6.4 / 26.5	4.9	
28.0	11.9	12.0	12.0	9.0	8.4	6.4	4.8	
30.0	10.6	11.1	11.0	9.0	8.2	6.4	4.6	3.4 / 30.4
32.0	9.5	9.9	9.9	9.0	8.0	6.4	4.4	3.3
34.0	8.5	8.9	8.9	9.0	7.8	6.4	4.3	3.3
36.0	7.7	8.0	8.0	8.6	7.6	6.4	4.2	3.2
38.0	6.9	7.2	7.2	7.8	7.4	6.4	4.0	3.1
40.0	6.2	6.5	6.5	7.1	6.8	6.4	3.9	3.1
42.0	5.6	5.9	5.9	6.4	6.2	6.2	3.8	3.0
44.0	5.0	5.3	5.4	5.8	5.6	6.0	3.7	2.9
46.0	4.5	4.7	4.9	5.2	5.1	5.7	3.6	2.9
48.0	4.1	4.3	4.4	4.7	4.7	5.2	3.5	2.8
50.0	3.7	3.8	4.0	4.3	4.2	4.7	3.4	2.8
52.0	3.3	3.4	3.6	3.9	3.8	4.3	3.3	2.7
54.0	2.9	3.1	3.2	3.5	3.5	3.9	3.3	2.7
56.0	2.6	2.7	2.9	3.1	3.1	3.5	3.2	2.7
58.0	2.3	2.4	2.6	2.8	2.8	3.2	3.0	2.6
60.0	2.0	2.1	2.3	2.5	2.5	2.8	2.7	2.6
62.0	1.9 / 60.8	1.9 / 61.4	2.0	2.2	2.3	2.5	2.5	2.6
64.0			1.9 / 63.0	1.9	2.0	2.3	2.2	2.6
66.0					1.9 / 65.0	2.0	2.0	2.3
68.0						1.9 / 66.6	1.9 / 66.6	2.0
70.0							1.9 / 69.0	2.0

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	60							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0							
18.0	12.0	12.0 / 19.2	12.0 / 18.3					
20.0	12.0	12.0	12.0		8.8 / 20.4			
22.0	12.0	12.0	12.0	9.0 / 23.1	8.8		5.3 / 22.5	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.0	5.0	
28.0	11.9	12.0	12.0	9.0	8.5	6.4	4.8	
30.0	10.5	11.1	10.9	9.0	8.3	6.4	4.6	3.4 / 30.9
32.0	9.4	9.9	9.8	9.0	8.1	6.4	4.5	3.3
34.0	8.4	8.9	8.8	9.0	7.9	6.4	4.4	3.3
36.0	7.6	7.9	7.9	8.6	7.7	6.4	4.2	3.2
38.0	6.8	7.1	7.2	7.7	7.4	6.4	4.1	3.1
40.0	6.1	6.4	6.5	7.0	6.7	6.4	4.0	3.1
42.0	5.5	5.8	5.8	6.3	6.1	6.3	3.9	3.0
44.0	4.9	5.2	5.3	5.7	5.5	6.1	3.8	3.0
46.0	4.4	4.7	4.8	5.2	5.0	5.6	3.7	2.9
48.0	4.0	4.2	4.3	4.7	4.6	5.1	3.6	2.9
50.0	3.6	3.7	3.9	4.2	4.1	4.6	3.5	2.8
52.0	3.2	3.3	3.5	3.8	3.7	4.2	3.4	2.8
54.0	2.8	3.0	3.1	3.4	3.4	3.8	3.3	2.7
56.0	2.5	2.6	2.8	3.0	3.0	3.4	3.2	2.7
58.0	2.2	2.3	2.5	2.7	2.7	3.1	2.9	2.7
60.0	1.9	2.0	2.2	2.4	2.4	2.8	2.6	2.6
62.0		1.9 / 60.6	1.9	2.1	2.1	2.5	2.3	2.6
64.0				1.9 / 63.3	1.9	2.2	2.1	2.5
66.0						1.9	1.9 / 65.6	2.2
68.0							2.0	2.0
70.0							1.9 / 68.6	2.0

Unit: ton								
Boom length (m)	63							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0 / 16.8							
18.0	12.0	12.0 / 19.8	12.0 / 18.9					
20.0	12.0	12.0	12.0		8.8 / 21.0			
22.0	12.0	12.0	12.0	9.0 / 23.7	8.8		5.3 / 23.1	
24.0	12.0	12.0	12.0	9.0	8.8		5.2	
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.5	5.0	
28.0	11.6	12.0	12.0	9.0	8.6	6.4	4.9	
30.0	10.3	10.9	10.7	9.0	8.4	6.4	4.7	3.4 / 31.4
32.0	9.2	9.7	9.6	9.0	8.2	6.4	4.6	3.4
34.0	8.2	8.7	8.6	9.0	8.0	6.4	4.4	3.3
36.0	7.3	7.8	7.7	8.4	7.8	6.4	4.3	3.2
38.0	6.6	7.0	6.9	7.6	7.2	6.4	4.2	3.2
40.0	5.9	6.2	6.2	6.8	6.5	6.4	4.0	3.1
42.0	5.3	5.6	5.6	6.1	5.9	6.4	3.9	3.0
44.0	4.7	5.0	5.1	5.5	5.3	6.0	3.8	3.0
46.0	4.2	4.5	4.5	5.0	4.8	5.5	3.7	2.9
48.0	3.8	4.0	4.1	4.5	4.3	4.9	3.6	2.9
50.0	3.3	3.5	3.6	4.0	3.9	4.5	3.5	2.8
52.0	2.9	3.1	3.3	3.6	3.5	4.0	3.5	2.8
54.0	2.6	2.8	2.9	3.2	3.1	3.6	3.4	2.7
56.0	2.3	2.4	2.6	2.8	2.8	3.2	3.0	2.7
58.0	2.0	2.1	2.3	2.5	2.5	2.9	2.7	2.7
60.0	1.9 / 58.6	1.9 / 59.3	2.0	2.2	2.2	2.6	2.4	2.7
62.0			1.9 / 60.6	1.9	1.9	2.3	2.1	2.6
64.0						2.0	1.9 / 63.6	2.3
66.0						1.9 / 64.6	2.0	2.0
68.0							1.9 / 67.0	2.0

Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	24								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.3	74.0	73.7	73.2	73.1	72.4	72.5	71.4	8.0
9.0	63.5	63.1	62.8	62.1	62.0	61.0	61.1	59.7	9.0
10.0	54.1	53.8	53.5	52.9	52.7	51.8	51.8	50.6	10.0
12.0	41.4	41.2	40.8	40.4	40.0	39.4	39.2	38.4	12.0
14.0	33.2	33.0	32.6	32.2	31.9	31.4	31.1	30.5	14.0
16.0	27.4	27.3	26.8	26.6	26.1	25.8	25.4	24.9	16.0
18.0	23.1	23.0	22.6	22.4	21.9	21.7	21.2	20.9	18.0
20.0	19.9	19.8	19.3	19.2	18.7	18.5	18.0	17.8	20.0
22.0	17.3	17.2	16.8	16.7	16.1	16.1	15.5	15.4	22.0
24.0	16.9 / 22.3	16.9 / 22.3	16.4 / 22.3	16.4 / 22.3	15.8 / 22.3	15.7 / 22.3	15.1 / 22.3	15.1 / 22.3	24.0

Unit: ton

Boom length (m)	27								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.1	73.8	73.6	73.1	73.0	72.2	72.4	71.3	8.0
9.0	63.5	63.1	62.8	62.1	62.1	61.0	61.2	59.7	9.0
10.0	54.1	53.8	53.5	52.9	52.7	51.8	51.9	50.7	10.0
12.0	41.3	41.1	40.7	40.3	40.0	39.4	39.3	38.4	12.0
14.0	33.1	32.9	32.5	32.2	31.8	31.4	31.1	30.4	14.0
16.0	27.3	27.2	26.7	26.5	26.1	25.7	25.4	24.9	16.0
18.0	23.0	22.9	22.5	22.3	21.9	21.6	21.2	20.8	18.0
20.0	19.8	19.7	19.2	19.1	18.6	18.4	18.0	17.7	20.0
22.0	17.2	17.1	16.7	16.6	16.1	15.9	15.4	15.2	22.0
24.0	15.1	15.0	14.6	14.5	14.0	13.9	13.4	13.3	24.0
26.0	14.3 / 24.9	14.2 / 24.9	13.8 / 24.9	13.7 / 24.9	13.2 / 24.9	13.1 / 24.9	12.6 / 24.9	12.5 / 24.9	26.0

- The rated loads determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The offset angles shown are of jib boom offset angle against the main boom, under load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12

■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	30								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
7.4	72.0	72.0	72.0	72.0	72.0	72.0 / 7.4	72.0 / 7.4	72.0 / 7.4	7.4
8.0	72.0	72.0	72.0	72.0	72.0	71.2	71.3	69.7	8.0
9.0	63.5	63.1	62.9	62.2	62.2	61.1	61.2	59.8	9.0
10.0	54.1	53.8	53.5	52.9	52.8	51.9	52.0	50.7	10.0
12.0	41.3	41.1	40.8	40.3	40.1	39.4	39.4	38.4	12.0
14.0	33.1	32.9	32.5	32.2	31.9	31.4	31.2	30.5	14.0
16.0	27.3	27.1	26.8	26.5	26.2	25.7	25.5	24.9	16.0
18.0	23.0	22.9	22.5	22.3	21.9	21.6	21.3	20.8	18.0
20.0	19.7	19.6	19.2	19.1	18.7	18.4	18.0	17.7	20.0
22.0	17.1	17.1	16.6	16.5	16.1	15.9	15.5	15.2	22.0
24.0	15.0	15.0	14.5	14.4	14.0	13.9	13.4	13.2	24.0
26.0	13.3	13.2	12.8	12.7	12.3	12.2	11.7	11.6	26.0
28.0	12.2 / 27.5	12.1 / 27.5	11.7 / 27.5	11.7 / 27.5	11.2 / 27.5	11.1 / 27.5	10.6 / 27.5	10.5 / 27.5	28.0

Unit: ton

Boom length (m)	33								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
7.4	72.0 / 7.9	72.0 / 7.9	72.0 / 7.9	72.0 / 7.9	71.9 / 7.9	70.7 / 7.9	70.9 / 7.9	69.2 / 7.9	7.4
8.0	72.0	72.0	71.7	70.9	70.8	69.6	69.7	68.1	8.0
9.0	62.6	62.2	61.8	61.1	61.0	60.0	60.0	58.6	9.0
10.0	54.0	53.7	53.4	52.8	52.8	51.8	52.0	50.7	10.0
12.0	41.3	41.0	40.7	40.2	40.1	39.3	39.3	38.4	12.0
14.0	33.0	32.8	32.4	32.1	31.8	31.3	31.2	30.4	14.0
16.0	27.2	27.0	26.7	26.4	26.1	25.6	25.4	24.8	16.0
18.0	22.9	22.8	22.4	22.2	21.8	21.5	21.2	20.7	18.0
20.0	19.6	19.5	19.1	18.9	18.6	18.3	18.0	17.6	20.0
22.0	17.0	16.9	16.5	16.4	16.0	15.8	15.4	15.1	22.0
24.0	14.9	14.8	14.4	14.3	13.9	13.7	13.3	13.1	24.0
26.0	13.2	13.1	12.7	12.6	12.2	12.1	11.6	11.4	26.0
28.0	11.7	11.7	11.3	11.2	10.8	10.7	10.2	10.1	28.0
30.0	10.5	10.4	10.0	10.0	9.5	9.5	9.0	8.9	30.0
32.0	10.4 / 30.1	10.4 / 30.1	10.0 / 30.1	9.9 / 30.1	9.5 / 30.1	9.4 / 30.1	8.9 / 30.1	8.9 / 30.1	32.0

Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	36								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
8.5	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	8.5
9.0	60.0	60.0	60.0	59.8	59.6	58.6	58.7	57.3	9.0
10.0	53.7	53.4	53.1	52.5	52.3	51.4	51.4	50.2	10.0
12.0	41.2	40.9	40.6	40.1	40.0	39.3	39.3	38.3	12.0
14.0	32.9	32.7	32.4	32.0	31.8	31.2	31.1	30.3	14.0
16.0	27.1	26.9	26.6	26.3	26.0	25.6	25.4	24.8	16.0
18.0	22.8	22.7	22.3	22.1	21.8	21.4	21.2	20.6	18.0
20.0	19.5	19.4	19.0	18.8	18.5	18.2	17.9	17.5	20.0
22.0	16.9	16.8	16.4	16.3	15.9	15.6	15.3	15.0	22.0
24.0	14.8	14.7	14.3	14.2	13.8	13.6	13.2	13.0	24.0
26.0	13.0	13.0	12.6	12.5	12.1	11.9	11.5	11.3	26.0
28.0	11.6	11.5	11.1	11.0	10.6	10.5	10.1	9.9	28.0
30.0	10.3	10.3	9.9	9.8	9.4	9.3	8.9	8.7	30.0
32.0	9.2	9.2	8.8	8.8	8.3	8.3	7.8	7.7	32.0
34.0	8.9 / 32.7	8.9 / 32.7	8.5 / 32.7	8.4 / 32.7	8.0 / 32.7	7.9 / 32.7	7.5 / 32.7	7.4 / 32.7	34.0

Unit: ton

Boom length (m)	39								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
9.0	59.9	59.5	59.2	58.5	58.4	57.4	57.5	56.1	9.0
10.0	52.7	52.4	52.0	51.5	51.3	50.4	50.4	49.2	10.0
12.0	41.1	40.8	40.5	40.0	39.9	39.2	39.3	38.2	12.0
14.0	32.8	32.5	32.3	31.9	31.7	31.1	31.1	30.2	14.0
16.0	27.0	26.8	26.5	26.1	25.9	25.4	25.3	24.7	16.0
18.0	22.7	22.5	22.2	21.9	21.7	21.3	21.1	20.5	18.0
20.0	19.4	19.2	18.9	18.7	18.4	18.1	17.8	17.4	20.0
22.0	16.8	16.7	16.3	16.1	15.8	15.5	15.2	14.9	22.0
24.0	14.6	14.5	14.2	14.0	13.7	13.5	13.1	12.8	24.0
26.0	12.9	12.8	12.4	12.3	12.0	11.8	11.4	11.2	26.0
28.0	11.4	11.4	11.0	10.9	10.5	10.3	10.0	9.8	28.0
30.0	10.2	10.1	9.7	9.7	9.3	9.1	8.7	8.6	30.0
32.0	9.1	9.0	8.7	8.6	8.2	8.1	7.7	7.6	32.0
34.0	8.2	8.1	7.7	7.7	7.3	7.2	6.8	6.7	34.0
36.0	7.6 / 35.3	7.6 / 35.3	7.2 / 35.3	7.2 / 35.3	6.8 / 35.3	6.7 / 35.3	6.3 / 35.3	6.2 / 35.3	36.0

■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton									
Boom length (m)	42								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
9.6	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	9.6
10.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	10.0
12.0	41.0	40.7	40.5	40.0	39.9	39.2	39.3	38.2	12.0
14.0	32.7	32.5	32.2	31.8	31.7	31.1	31.1	30.2	14.0
16.0	26.9	26.7	26.4	26.1	25.9	25.4	25.3	24.6	16.0
18.0	22.6	22.5	22.2	21.9	21.6	21.2	21.1	20.5	18.0
20.0	19.3	19.2	18.9	18.6	18.4	18.0	17.8	17.3	20.0
22.0	16.7	16.6	16.3	16.1	15.8	15.5	15.2	14.8	22.0
24.0	14.6	14.5	14.1	14.0	13.6	13.4	13.1	12.8	24.0
26.0	12.8	12.7	12.4	12.2	11.9	11.7	11.4	11.1	26.0
28.0	11.3	11.3	10.9	10.8	10.4	10.3	9.9	9.7	28.0
30.0	10.1	10.0	9.7	9.6	9.2	9.1	8.7	8.5	30.0
32.0	9.0	8.9	8.6	8.5	8.1	8.0	7.6	7.5	32.0
34.0	8.1	8.0	7.6	7.6	7.2	7.1	6.7	6.6	34.0
36.0	7.2	7.2	6.8	6.8	6.4	6.3	5.9	5.8	36.0
38.0	6.5 / 37.9	6.5 / 37.9	6.1 / 37.9	6.1 / 37.9	5.7 / 37.9	5.7 / 37.9	5.2 / 37.9	5.2 / 37.9	38.0

Unit: ton									
Boom length (m)	45								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
10.0	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	47.7 /10.1	47.8 /10.1	46.6 /10.1	10.0
12.0	40.6	40.3	40.0	39.5	39.3	38.6	38.5	37.5	12.0
14.0	32.6	32.3	32.1	31.7	31.5	30.9	30.9	30.1	14.0
16.0	26.7	26.5	26.3	25.9	25.7	25.2	25.2	24.5	16.0
18.0	22.4	22.3	22.0	21.7	21.5	21.0	20.9	20.3	18.0
20.0	19.1	19.0	18.7	18.4	18.2	17.8	17.6	17.1	20.0
22.0	16.5	16.4	16.1	15.8	15.6	15.3	15.0	14.6	22.0
24.0	14.4	14.3	13.9	13.8	13.5	13.2	12.9	12.6	24.0
26.0	12.6	12.5	12.2	12.0	11.7	11.5	11.2	10.9	26.0
28.0	11.1	11.0	10.7	10.6	10.2	10.1	9.7	9.5	28.0
30.0	9.9	9.8	9.5	9.3	9.0	8.8	8.5	8.3	30.0
32.0	8.8	8.7	8.4	8.3	7.9	7.8	7.4	7.3	32.0
34.0	7.8	7.8	7.4	7.4	7.0	6.9	6.5	6.4	34.0
36.0	7.0	7.0	6.6	6.5	6.2	6.1	5.7	5.6	36.0
38.0	6.3	6.2	5.9	5.8	5.5	5.4	5.0	4.9	38.0
40.0	5.6	5.6	5.2	5.2	4.8	4.8	4.4	4.3	40.0
42.0	5.5 /40.5	5.5 /40.5	5.1 /40.5	5.1 /40.5	4.7 /40.5	4.6 /40.5	4.2 /40.5	4.2 /40.5	42.0

Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	48								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
10.6	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	32.5	32.3	32.0	31.6	31.5	30.9	30.9	30.0	14.0
16.0	26.7	26.5	26.2	25.9	25.7	25.2	25.2	24.4	16.0
18.0	22.4	22.2	21.9	21.6	21.4	21.0	20.9	20.3	18.0
20.0	19.1	18.9	18.6	18.4	18.1	17.8	17.6	17.1	20.0
22.0	16.4	16.3	16.0	15.8	15.5	15.2	15.0	14.6	22.0
24.0	14.3	14.2	13.9	13.7	13.4	13.1	12.9	12.5	24.0
26.0	12.5	12.4	12.1	12.0	11.7	11.4	11.2	10.8	26.0
28.0	11.1	11.0	10.6	10.5	10.2	10.0	9.7	9.4	28.0
30.0	9.8	9.7	9.4	9.3	8.9	8.8	8.5	8.2	30.0
32.0	8.7	8.6	8.3	8.2	7.9	7.7	7.4	7.2	32.0
34.0	7.8	7.7	7.4	7.3	6.9	6.8	6.4	6.3	34.0
36.0	6.9	6.9	6.5	6.4	6.1	6.0	5.6	5.5	36.0
38.0	6.2	6.1	5.8	5.7	5.4	5.3	4.9	4.8	38.0
40.0	5.5	5.5	5.1	5.1	4.7	4.7	4.3	4.2	40.0
42.0	4.9	4.9	4.6	4.5	4.2	4.1	3.7	3.6	42.0
44.0	4.7 / 43.1	4.6 / 43.1	4.3 / 43.1	4.2 / 43.1	3.9 / 43.1	3.8 / 43.1	3.4 / 43.1	3.4 / 43.1	44.0

Unit: ton

Boom length (m)	51								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
10.6	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	32.3	32.1	31.7	31.3	31.1	30.5	30.4	29.6	14.0
16.0	26.5	26.3	26.1	25.7	25.6	25.0	25.0	24.3	16.0
18.0	22.2	22.1	21.8	21.5	21.3	20.8	20.8	20.1	18.0
20.0	18.9	18.8	18.5	18.2	18.0	17.6	17.5	17.0	20.0
22.0	16.3	16.2	15.9	15.6	15.4	15.1	14.9	14.4	22.0
24.0	14.2	14.0	13.7	13.5	13.3	13.0	12.8	12.4	24.0
26.0	12.4	12.3	12.0	11.8	11.5	11.3	11.0	10.7	26.0
28.0	10.9	10.8	10.5	10.3	10.0	9.8	9.6	9.3	28.0
30.0	9.6	9.5	9.2	9.1	8.8	8.6	8.3	8.1	30.0
32.0	8.5	8.5	8.1	8.0	7.7	7.5	7.2	7.0	32.0
34.0	7.6	7.5	7.2	7.1	6.8	6.6	6.3	6.1	34.0
36.0	6.8	6.7	6.4	6.3	5.9	5.8	5.5	5.3	36.0
38.0	6.0	6.0	5.6	5.6	5.2	5.1	4.8	4.6	38.0
40.0	5.4	5.3	5.0	4.9	4.6	4.5	4.1	4.0	40.0
42.0	4.8	4.7	4.4	4.3	4.0	3.9	3.5	3.5	42.0
44.0	4.2	4.2	3.9	3.8	3.5	3.4	3.0	3.0	44.0
46.0	3.8 / 45.7	3.8 / 45.7	3.5 / 45.7	3.4 / 45.7	3.1 / 45.7	3.0 / 45.7	2.6 / 45.7	2.6 / 45.7	46.0

■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	54								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
11.7	36.0	36.0	36.0	36.0	36.0	36.0	36.0	35.7	11.7
12.0	36.0	36.0	36.0	36.0	36.0	36.0	35.6	35.3	12.0
14.0	31.6	31.4	31.1	30.7	30.5	29.9	29.8	29.0	14.0
16.0	26.4	26.1	25.9	25.5	25.4	24.9	24.9	24.1	16.0
18.0	22.0	21.9	21.6	21.3	21.1	20.7	20.6	20.0	18.0
20.0	18.7	18.6	18.3	18.0	17.8	17.4	17.3	16.8	20.0
22.0	16.1	15.9	15.7	15.4	15.2	14.9	14.7	14.2	22.0
24.0	13.9	13.8	13.5	13.3	13.1	12.8	12.6	12.2	24.0
26.0	12.2	12.1	11.8	11.6	11.3	11.1	10.8	10.5	26.0
28.0	10.7	10.6	10.3	10.1	9.8	9.6	9.4	9.1	28.0
30.0	9.4	9.3	9.0	8.9	8.6	8.4	8.1	7.8	30.0
32.0	8.3	8.2	7.9	7.8	7.5	7.3	7.0	6.8	32.0
34.0	7.4	7.3	7.0	6.9	6.6	6.4	6.1	5.9	34.0
36.0	6.5	6.5	6.1	6.1	5.7	5.6	5.3	5.1	36.0
38.0	5.8	5.7	5.4	5.3	5.0	4.9	4.5	4.4	38.0
40.0	5.1	5.1	4.8	4.7	4.3	4.2	3.9	3.8	40.0
42.0	4.5	4.5	4.2	4.1	3.8	3.7	3.3	3.2	42.0
44.0	4.0	4.0	3.6	3.6	3.2	3.2	2.8	2.7	44.0
46.0	3.5	3.5	3.2	3.1	2.8	2.7	2.4	2.3	46.0
48.0	3.1	3.1	2.7	2.7	2.4	2.3	1.9	1.9	48.0
50.0	3.0 / 48.3	3.0 / 48.3	2.7 / 48.3	2.7 / 48.3	2.3 / 48.3	2.3 / 48.3	1.9 / 48.3		50.0

Unit: ton

Boom length (m)	57								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
12.0	35.2 / 12.3	35.2 / 12.3	34.2 / 12.3	34.1 / 12.3	33.0 / 12.3	32.9 / 12.3	31.7 / 12.3	31.5 / 12.3	12.0
14.0	31.0	30.8	30.5	30.1	29.9	29.3	29.2	28.4	14.0
16.0	26.2	26.0	25.7	25.3	25.1	24.6	24.5	23.8	16.0
18.0	21.9	21.7	21.4	21.1	21.0	20.5	20.5	19.8	18.0
20.0	18.6	18.4	18.1	17.9	17.7	17.3	17.2	16.6	20.0
22.0	15.9	15.8	15.5	15.3	15.1	14.7	14.6	14.1	22.0
24.0	13.8	13.7	13.4	13.2	12.9	12.6	12.4	12.0	24.0
26.0	12.0	11.9	11.6	11.4	11.2	10.9	10.7	10.3	26.0
28.0	10.5	10.4	10.1	10.0	9.7	9.4	9.2	8.9	28.0
30.0	9.2	9.2	8.9	8.7	8.4	8.2	8.0	7.7	30.0
32.0	8.2	8.1	7.8	7.6	7.3	7.2	6.9	6.6	32.0
34.0	7.2	7.1	6.8	6.7	6.4	6.2	5.9	5.7	34.0
36.0	6.4	6.3	6.0	5.9	5.6	5.4	5.1	4.9	36.0
38.0	5.6	5.6	5.2	5.1	4.8	4.7	4.4	4.2	38.0
40.0	5.0	4.9	4.6	4.5	4.2	4.1	3.7	3.6	40.0
42.0	4.4	4.3	4.0	3.9	3.6	3.5	3.2	3.0	42.0
44.0	3.8	3.8	3.5	3.4	3.1	3.0	2.6	2.5	44.0
46.0	3.4	3.3	3.0	2.9	2.6	2.5	2.2	2.1	46.0
48.0	2.9	2.9	2.6	2.5	2.2	2.1	1.9 / 47.5	1.9 / 47.0	48.0
50.0	2.5	2.5	2.2	2.1	1.9 / 49.5	1.9 / 49.3			50.0
52.0	2.4 / 50.9	2.3 / 50.9	2.0 / 50.9	2.0 / 50.9					52.0

Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	60								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10		30		10		30		Offset angle (deg)
Radius (m)	10		30		10		30		Radius (m)
12.9	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	12.9
14.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	14.0
16.0	24.0	24.0	24.0	24.0	24.0	24.0	23.9	23.2	16.0
18.0	21.9	21.7	21.4	21.1	20.9	20.5	20.3	19.7	18.0
20.0	18.5	18.4	18.1	17.8	17.7	17.2	17.2	16.6	20.0
22.0	15.9	15.7	15.5	15.2	15.0	14.7	14.5	14.0	22.0
24.0	13.7	13.6	13.3	13.1	12.9	12.6	12.4	12.0	24.0
26.0	12.0	11.8	11.6	11.4	11.1	10.8	10.7	10.3	26.0
28.0	10.5	10.4	10.1	9.9	9.6	9.4	9.2	8.8	28.0
30.0	9.2	9.1	8.8	8.6	8.4	8.1	7.9	7.6	30.0
32.0	8.1	8.0	7.7	7.6	7.3	7.1	6.8	6.6	32.0
34.0	7.1	7.0	6.7	6.6	6.3	6.1	5.9	5.6	34.0
36.0	6.3	6.2	5.9	5.8	5.5	5.3	5.0	4.8	36.0
38.0	5.5	5.5	5.1	5.0	4.7	4.6	4.3	4.1	38.0
40.0	4.9	4.8	4.5	4.4	4.1	4.0	3.7	3.5	40.0
42.0	4.3	4.2	3.9	3.8	3.5	3.4	3.1	2.9	42.0
44.0	3.7	3.7	3.4	3.3	3.0	2.9	2.5	2.4	44.0
46.0	3.2	3.2	2.9	2.8	2.5	2.4	2.1	2.0	46.0
48.0	2.8	2.8	2.4	2.4	2.0	2.0	1.9 /46.8	1.9 /46.5	48.0
50.0	2.4	2.4	2.0	2.0	1.9 /48.6	1.9 /48.5			50.0
52.0	2.0	2.0	1.9 /50.6	1.9 /50.5					52.0
54.0	1.9 /52.6	1.9 /52.6							54.0

Unit: ton

Boom length (m)	63								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10		30		10		30		Offset angle (deg)
Radius (m)	10		30		10		30		Radius (m)
12.9	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	23.8 /13.5	23.6 /13.5	12.9
14.0	24.0	24.0	24.0	24.0	24.0	24.0	23.4	23.2	14.0
16.0	24.0	24.0	23.6	23.6	22.7	22.7	21.7	21.6	16.0
18.0	21.5	21.3	21.0	20.7	20.4	20.0	19.8	19.2	18.0
20.0	18.3	18.2	17.9	17.6	17.5	17.1	17.0	16.4	20.0
22.0	15.7	15.5	15.3	15.0	14.8	14.5	14.4	13.9	22.0
24.0	13.5	13.4	13.1	12.9	12.7	12.4	12.2	11.8	24.0
26.0	11.7	11.6	11.4	11.2	10.9	10.6	10.5	10.1	26.0
28.0	10.2	10.1	9.9	9.7	9.4	9.2	9.0	8.6	28.0
30.0	9.0	8.9	8.6	8.4	8.2	7.9	7.7	7.4	30.0
32.0	7.9	7.8	7.5	7.3	7.1	6.9	6.6	6.3	32.0
34.0	6.9	6.8	6.5	6.4	6.1	5.9	5.7	5.4	34.0
36.0	6.1	6.0	5.7	5.6	5.3	5.1	4.8	4.6	36.0
38.0	5.3	5.2	4.9	4.8	4.5	4.4	4.1	3.9	38.0
40.0	4.6	4.6	4.3	4.2	3.9	3.7	3.4	3.3	40.0
42.0	4.0	4.0	3.7	3.6	3.3	3.2	2.9	2.7	42.0
44.0	3.5	3.4	3.1	3.1	2.7	2.6	2.3	2.2	44.0
46.0	3.0	3.0	2.7	2.6	2.3	2.2	1.9 /45.6	1.9 /45.2	46.0
48.0	2.6	2.5	2.2	2.2	1.9 /47.6	1.9 /47.5			48.0
50.0	2.2	2.1	1.9 /49.5	1.9 /49.5					50.0
52.0	1.9 /51.5	1.9 /51.3							52.0

Main Boom (Using Third Winch) (With Crane Boom Extensions)



Working Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius (m)
4.6	120.0											4.6
5.0	120.4	108.0 /5.2										5.0
5.5	109.9	108.0	84.0 /5.7									5.5
6.0	101.1	100.9	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	87.0	86.8	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	76.3	76.1	75.9	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.8	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.4	55.4	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.6	42.5	42.4	42.3	36.0	36.0	12.0
14.0	34.5	34.5	34.5	34.5	34.4	34.4	34.2	34.1	34.0	34.0	33.8	14.0
16.0	32.9 /14.5	28.8	28.7	28.7	28.6	28.6	28.5	28.3	28.2	28.2	28.0	16.0
18.0		26.3 /17.1	24.5	24.5	24.3	24.3	24.2	24.1	23.9	23.9	23.7	18.0
20.0			21.6 /19.7	21.2	21.1	21.0	20.9	20.8	20.6	20.6	20.4	20.0
22.0				18.6	18.5	18.4	18.3	18.1	18.0	17.9	17.7	22.0
24.0				18.3 /22.3	16.4	16.3	16.2	16.0	15.9	15.8	15.6	24.0
26.0					15.5 /24.9	14.6	14.4	14.3	14.1	14.1	13.8	26.0
28.0						13.4 /27.5	13.0	12.8	12.7	12.6	12.4	28.0
30.0							11.7	11.5	11.4	11.3	11.1	30.0
32.0							11.7 /30.1	10.5	10.3	10.2	10.0	32.0
34.0								10.1 /32.7	9.4	9.3	9.1	34.0
36.0									8.8 /35.3	8.4	8.2	36.0
38.0										7.7 /37.9	7.5	38.0
40.0											6.8	40.0
42.0											6.7 /40.5	42.0

Working Radius (m)	Boom length (m)						Unit: ton
	48	51	54	57	60	63	Working Radius (m)
10.0	36.0 / 10.6	24.0 / 11.2	24.0 / 11.7				10.0
12.0	36.0	24.0	24.0	24.0 / 12.3	24.0 / 12.9	24.0 / 13.5	12.0
14.0	33.7	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.9	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.6	23.5	23.3	23.1	22.9	22.4	18.0
20.0	20.3	20.2	20.0	19.8	19.8	19.6	20.0
22.0	17.7	17.5	17.3	17.2	17.1	16.9	22.0
24.0	15.5	15.4	15.2	15.0	15.0	14.8	24.0
26.0	13.8	13.6	13.4	13.3	13.2	13.0	26.0
28.0	12.3	12.1	11.9	11.8	11.7	11.5	28.0
30.0	11.0	10.9	10.7	10.5	10.4	10.2	30.0
32.0	9.9	9.8	9.6	9.4	9.3	9.1	32.0
34.0	9.0	8.8	8.6	8.4	8.4	8.1	34.0
36.0	8.1	8.0	7.8	7.6	7.5	7.3	36.0
38.0	7.4	7.2	7.0	6.8	6.8	6.5	38.0
40.0	6.7	6.6	6.3	6.2	6.1	5.9	40.0
42.0	6.1	6.0	5.8	5.6	5.5	5.3	42.0
44.0	5.8 / 43.1	5.4	5.2	5.0	4.9	4.7	44.0
46.0		5.0 / 45.7	4.7	4.6	4.5	4.2	46.0
48.0			4.3	4.1	4.0	3.8	48.0
50.0			4.2 / 48.3	3.7	3.6	3.4	50.0
52.0				3.6 / 50.9	3.2	3.0	52.0
54.0					3.0 / 53.2	2.7	54.0
56.0						2.4 / 55.8	56.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
- Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	

Main Boom with Aux. Sheave (Using Third Winch) (With Crane Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
4.6	120.0											4.6
5.0	119.5	108.0 /5.2										5.0
5.5	109.1	108.0	84.0 /5.7									5.5
6.0	100.2	100.0	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	86.2	86.0	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	75.4	75.2	75.1	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.0	55.1	55.0	55.0	55.0	54.9	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.2	42.1	42.0	41.9	36.0	36.0	12.0
14.0	34.2	34.2	34.1	34.1	34.0	34.0	33.8	33.7	33.6	33.5	33.3	14.0
16.0	32.6 /14.5	28.4	28.4	28.4	28.2	28.2	28.1	27.9	27.8	27.7	27.5	16.0
18.0		26.0 /17.1	24.1	24.1	24.0	23.9	23.8	23.7	23.5	23.4	23.2	18.0
20.0			21.3 /19.7	20.8	20.7	20.6	20.5	20.4	20.2	20.1	19.9	20.0
22.0				18.3	18.1	18.0	17.9	17.8	17.6	17.5	17.3	22.0
24.0				17.9 /22.3	16.0	15.9	15.8	15.6	15.5	15.4	15.2	24.0
26.0					15.2 /24.9	14.2	14.1	13.9	13.7	13.7	13.4	26.0
28.0						13.1 /27.5	12.6	12.4	12.3	12.2	12.0	28.0
30.0							11.4	11.2	11.0	10.9	10.7	30.0
32.0							11.3 /30.1	10.1	10.0	9.8	9.6	32.0
34.0								9.8 /32.7	9.0	8.9	8.7	34.0
36.0									8.5 /35.3	8.1	7.8	36.0
38.0										7.4 /37.9	7.1	38.0
40.0											6.5	40.0
42.0											6.3 /40.5	42.0

Radius (m)	Boom length (m)						Radius (m)
	48	51	54	57	60	63	
10.0	36.0 / 10.6	24.0 / 11.2	24.0 / 11.7				10.0
12.0	36.0	24.0	24.0	24.0 / 12.3	24.0 / 12.9	24.0 / 13.5	12.0
14.0	33.3	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.5	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.2	23.0	22.8	22.6	22.2	21.6	18.0
20.0	19.9	19.7	19.5	19.3	19.3	18.8	20.0
22.0	17.2	17.1	16.9	16.7	16.7	16.4	22.0
24.0	15.1	15.0	14.7	14.6	14.5	14.3	24.0
26.0	13.4	13.2	13.0	12.8	12.7	12.5	26.0
28.0	11.9	11.7	11.5	11.3	11.2	11.0	28.0
30.0	10.6	10.4	10.2	10.0	10.0	9.7	30.0
32.0	9.5	9.3	9.1	8.9	8.9	8.6	32.0
34.0	8.6	8.4	8.2	8.0	7.9	7.7	34.0
36.0	7.7	7.6	7.3	7.2	7.1	6.8	36.0
38.0	7.0	6.8	6.6	6.4	6.3	6.1	38.0
40.0	6.4	6.2	5.9	5.8	5.6	5.4	40.0
42.0	5.8	5.6	5.3	5.2	5.1	4.8	42.0
44.0	5.5 / 43.1	5.1	4.8	4.6	4.5	4.3	44.0
46.0		4.7 / 45.7	4.3	4.2	4.0	3.8	46.0
48.0			3.9	3.7	3.6	3.4	48.0
50.0			3.9 / 48.3	3.3	3.2	3.0	50.0
52.0				3.2 / 50.9	2.8	2.6	52.0
54.0					2.6 / 53.2	2.2	54.0
56.0						2.0 / 55.8	56.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
- Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	

Main Boom (With Tower Boom Extensions)



Working Radius(m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius(m)
4.6	120.0											4.6
5.0	120.0	115.8 /5.2										5.0
5.5	109.9	109.7	105.9 /5.7									5.5
6.0	101.1	100.9	100.7	95.9 /6.3	84.0 /6.8							6.0
7.0	87.0	86.8	86.7	86.5	84.0	72.0 /7.4	72.0 /7.9					7.0
8.0	76.3	76.1	75.9	75.8	75.6	72.0	72.0	60.0 /8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.7	64.7	63.6	60.0	60.0	48.0 /9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.3	55.2	55.2	54.8	53.5	48.0	48.0 /10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.5	42.4	42.3	42.1	42.1	41.4	12.0
14.0	34.5	34.5	34.5	34.4	34.3	34.2	34.2	34.0	33.8	33.8	33.6	14.0
16.0	32.9 /14.5	28.8	28.7	28.7	28.6	28.4	28.4	28.2	28.0	28.0	27.8	16.0
18.0		26.3 /17.1	24.5	24.4	24.3	24.2	24.1	23.9	23.7	23.7	23.5	18.0
20.0			21.6 /19.7	21.2	21.0	20.9	20.8	20.6	20.4	20.4	20.2	20.0
22.0				18.6	18.4	18.3	18.2	18.0	17.8	17.8	17.5	22.0
24.0				18.2 /22.3	16.3	16.2	16.1	15.9	15.7	15.6	15.4	24.0
26.0					15.5 /24.9	14.4	14.3	14.1	13.9	13.9	13.6	26.0
28.0						13.3 /27.5	12.9	12.7	12.4	12.4	12.2	28.0
30.0							11.6	11.4	11.2	11.1	10.9	30.0
32.0							11.6 /30.1	10.3	10.1	10.0	9.8	32.0
34.0								10.0 /32.7	9.2	9.1	8.8	34.0
36.0									8.6 /35.3	8.3	8.0	36.0
38.0										7.6 /37.9	7.3	38.0
40.0											6.6	40.0
42.0											6.5 /40.5	42.0

Working Radius(m)	Boom length (m)										Unit: ton
	48	51	54	57	60	63	66	69	72	75	Working Radius(m)
10.0	36.0 /10.6	36.0 /11.2	36.0 /11.7								10.0
12.0	36.0	36.0	36.0	36.0 /12.3	24.0 /12.9	24.0 /13.5					12.0
14.0	33.6	33.1	32.4	31.7	24.0	24.0	24.0	24.0 /14.5	23.5 /15.1	21.0 /15.6	14.0
16.0	27.8	27.7	27.4	27.0	24.0	24.0	24.0	24.0	23.1	20.8	16.0
18.0	23.5	23.3	23.1	23.0	22.8	22.2	21.7	21.2	20.5	20.0	18.0
20.0	20.1	20.0	19.8	19.7	19.7	19.4	18.9	18.4	17.9	17.4	20.0
22.0	17.5	17.4	17.2	17.0	17.0	16.8	16.7	16.2	15.7	15.2	22.0
24.0	15.4	15.3	15.0	14.9	14.9	14.6	14.5	14.3	13.9	13.4	24.0
26.0	13.6	13.5	13.2	13.1	13.1	12.9	12.7	12.6	12.3	11.9	26.0
28.0	12.1	12.0	11.8	11.6	11.6	11.4	11.2	11.1	10.8	10.6	28.0
30.0	10.9	10.7	10.5	10.3	10.3	10.1	9.9	9.8	9.5	9.4	30.0
32.0	9.8	9.6	9.4	9.2	9.2	9.0	8.8	8.7	8.4	8.3	32.0
34.0	8.8	8.7	8.4	8.3	8.2	8.0	7.9	7.7	7.5	7.3	34.0
36.0	8.0	7.8	7.6	7.4	7.4	7.2	7.0	6.8	6.6	6.4	36.0
38.0	7.2	7.1	6.8	6.7	6.6	6.4	6.3	6.1	5.9	5.7	38.0
40.0	6.6	6.4	6.2	6.0	6.0	5.7	5.6	5.4	5.2	5.0	40.0
42.0	6.0	5.8	5.6	5.4	5.4	5.1	5.0	4.8	4.6	4.4	42.0
44.0	5.7 /43.1	5.3	5.0	4.9	4.8	4.6	4.4	4.3	4.0	3.9	44.0
46.0		4.9 /45.7	4.6	4.4	4.3	4.1	3.9	3.8	3.5	3.4	46.0
48.0			4.1	4.0	3.9	3.6	3.5	3.3	3.1	2.9	48.0
50.0			4.1 /48.3	3.6	3.5	3.2	3.1	2.9	2.7	2.5	50.0
52.0				3.4 /50.9	3.1	2.9	2.7	2.5	2.3	2.1	52.0
54.0					2.9 /53.2	2.5	2.4	2.2	2.0	1.8	54.0
56.0						2.2 /55.8	2.0	1.9	1.6	1.5	56.0
58.0							1.7	1.6	1.4 /57.3	1.4 /56.6	58.0
60.0							1.7 /58.4	1.4 /59.3			60.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12

■ Aux. Sheave (With Tower Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
5.8	12.0											5.8
6.0	12.0	12.0 / 6.3	12.0 / 6.9									6.0
7.0	12.0	12.0	12.0	12.0 / 7.4								7.0
8.0	12.0	12.0	12.0	12.0	12.0	12.0 / 8.5						8.0
9.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 9.6				9.0
10.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 10.1	12.0 / 10.7	12.0 / 11.2	10.0
12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	16.0
18.0	12.0 / 16.1	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0		12.0 / 18.7	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0			12.0 / 21.3	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0				12.0 / 23.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0					12.0	12.0	12.0	12.0	12.0	12.0	12.0	26.0
28.0					12.0 / 26.5	12.0	12.0	12.0	12.0	12.0	12.0	28.0
30.0						12.0 / 29.1	11.4	11.2	11.0	10.9	10.7	30.0
32.0							10.5 / 31.7	10.1	9.9	9.8	9.6	32.0
34.0								9.2	9.0	8.9	8.6	34.0
36.0								9.1 / 34.3	8.1	8.0	7.8	36.0
38.0									7.8 / 36.9	7.3	7.0	38.0
40.0										6.8 / 39.5	6.4	40.0
42.0											5.8	42.0
44.0											5.8 / 42.1	44.0

Radius (m)	Boom length (m)									Unit: ton
	48	51	54	57	60	63	66	69	72	Radius (m)
10.0	12.0 / 11.8									10.0
12.0	12.0	12.0 / 12.3	12.0 / 12.9	12.0 / 13.4						12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0 / 14.5	12.0 / 15.1	12.0 / 15.6		14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 16.2	16.0
18.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.7	26.0
28.0	11.9	11.8	11.6	11.4	11.4	11.2	11.0	10.8	10.4	28.0
30.0	10.6	10.5	10.3	10.1	10.1	9.9	9.7	9.5	9.2	30.0
32.0	9.5	9.4	9.2	9.0	9.0	8.7	8.6	8.4	8.2	32.0
34.0	8.6	8.4	8.2	8.0	8.0	7.8	7.6	7.4	7.2	34.0
36.0	7.7	7.6	7.3	7.2	7.1	6.9	6.7	6.6	6.3	36.0
38.0	7.0	6.8	6.6	6.4	6.4	6.1	6.0	5.8	5.6	38.0
40.0	6.3	6.2	5.9	5.8	5.7	5.5	5.3	5.1	4.9	40.0
42.0	5.7	5.6	5.3	5.2	5.1	4.9	4.7	4.5	4.3	42.0
44.0	5.2	5.0	4.8	4.6	4.6	4.3	4.2	4.0	3.7	44.0
46.0	5.0 / 44.7	4.5	4.3	4.1	4.1	3.8	3.7	3.5	3.2	46.0
48.0		4.3 / 47.3	3.8	3.7	3.6	3.4	3.2	3.0	2.8	48.0
50.0			3.5 / 49.8	3.3	3.2	2.9	2.8	2.6	2.4	50.0
52.0				2.9	2.8	2.6	2.4	2.2	2.0	52.0
54.0				2.8 / 52.4	2.5	2.2	2.1	1.9	1.9 / 52.5	54.0
56.0					2.3 / 55.0	1.9	1.9 / 55.0			56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.

■ Main Boom with Aux. Sheave (With Tower Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
4.6	120.0											4.6
5.0	119.5	114.9 / 5.2										5.0
5.5	109.1	108.9	105.0 / 5.7									5.5
6.0	100.2	100.0	99.9	95.0 / 6.3	84.0 / 6.8							6.0
7.0	86.2	86.0	85.8	85.6	84.0	72.0 / 7.4	72.0 / 7.9					7.0
8.0	75.4	75.2	75.1	74.9	74.7	72.0	72.0	60.0 / 8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	64.2	63.0	60.0	60.0	48.0 / 9.6		9.0
10.0	55.0	55.1	55.0	55.0	54.9	54.8	54.8	54.1	52.9	48.0	48.0 / 10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.1	42.0	41.9	41.7	41.6	40.7	12.0
14.0	34.2	34.2	34.1	34.1	33.9	33.8	33.7	33.6	33.4	33.4	33.1	14.0
16.0	32.6 / 14.5	28.4	28.4	28.3	28.2	28.0	28.0	27.8	27.6	27.6	27.3	16.0
18.0		26.0 / 17.1	24.1	24.1	23.9	23.8	23.7	23.5	23.3	23.3	23.0	18.0
20.0			21.3 / 19.7	20.8	20.6	20.5	20.4	20.2	20.0	20.0	19.7	20.0
22.0				18.2	18.1	17.9	17.8	17.6	17.4	17.4	17.1	22.0
24.0				17.9 / 22.3	16.0	15.8	15.7	15.5	15.3	15.2	15.0	24.0
26.0					15.1 / 24.9	14.1	14.0	13.8	13.5	13.5	13.2	26.0
28.0						12.9 / 27.5	12.5	12.3	12.1	12.0	11.7	28.0
30.0							11.3	11.1	10.8	10.7	10.5	30.0
32.0							11.2 / 30.1	10.0	9.7	9.7	9.4	32.0
34.0								9.6 / 32.7	8.8	8.7	8.5	34.0
36.0									8.3 / 35.3	7.9	7.6	36.0
38.0										7.2 / 37.9	6.9	38.0
40.0											6.3	40.0
42.0											6.1 / 40.5	42.0

Radius (m)	Boom length (m)									Unit: ton
	48	51	54	57	60	63	66	69	72	Radius (m)
10.0	36.0 / 10.6	36.0 / 11.2	36.0 / 11.7							10.0
12.0	36.0	36.0	36.0	36.0 / 12.3	24.0 / 12.9	24.0 / 13.5				12.0
14.0	33.1	32.4	31.7	31.0	24.0	24.0	24.0	24.0 / 14.5	22.4 / 15.1	14.0
16.0	27.3	27.2	26.9	26.3	24.0	24.0	24.0	23.8	22.0	16.0
18.0	23.0	22.9	22.6	22.5	22.1	21.5	21.0	20.4	19.8	18.0
20.0	19.7	19.6	19.3	19.2	19.2	18.7	18.2	17.7	17.1	20.0
22.0	17.1	16.9	16.7	16.6	16.5	16.3	15.9	15.5	14.9	22.0
24.0	15.0	14.8	14.6	14.4	14.4	14.2	14.0	13.6	13.1	24.0
26.0	13.2	13.0	12.8	12.7	12.6	12.4	12.2	12.1	11.6	26.0
28.0	11.7	11.6	11.3	11.2	11.1	10.9	10.7	10.6	10.3	28.0
30.0	10.4	10.3	10.0	9.9	9.8	9.6	9.4	9.3	9.0	30.0
32.0	9.3	9.2	9.0	8.8	8.7	8.5	8.3	8.2	7.9	32.0
34.0	8.4	8.3	8.0	7.8	7.8	7.5	7.4	7.2	7.0	34.0
36.0	7.6	7.4	7.2	7.0	6.9	6.7	6.5	6.4	6.1	36.0
38.0	6.8	6.7	6.4	6.3	6.2	5.9	5.8	5.6	5.4	38.0
40.0	6.2	6.0	5.8	5.6	5.5	5.3	5.1	4.9	4.7	40.0
42.0	5.6	5.4	5.2	5.0	4.9	4.7	4.5	4.3	4.1	42.0
44.0	5.3 / 43.1	4.9	4.6	4.5	4.4	4.1	4.0	3.8	3.6	44.0
46.0		4.5 / 45.7	4.2	4.0	3.9	3.7	3.5	3.3	3.1	46.0
48.0			3.7	3.6	3.5	3.2	3.0	2.9	2.6	48.0
50.0			3.7 / 48.3	3.2	3.1	2.8	2.6	2.5	2.2	50.0
52.0				3.0 / 50.9	2.7	2.4	2.3	2.1	1.9 / 51.5	52.0
54.0					2.5 / 53.2	2.1	1.9	1.9 / 53.3		54.0
56.0						1.9 / 55.2				56.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12

Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	24							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
9.7	12.0							9.7
10.0	12.0		12.0 / 11.8					10.0
12.0	12.0	12.0 / 12.6	12.0		8.8 / 13.9			12.0
14.0	12.0	12.0	12.0		8.8			14.0
16.0	12.0	12.0	12.0	9.0 / 16.5	8.8		5.4	16.0
18.0	12.0	12.0	12.0	9.0	8.6		5.1	18.0
20.0	12.0	12.0	12.0	9.0	8.3	6.4 / 20.4	4.8	20.0
22.0	12.0	11.7	12.0	9.0	7.9	6.4	4.5	22.0
24.0	12.0	11.2	12.0	9.0	7.6	6.4	4.3	24.0
26.0	12.0	10.8	12.0	8.7	7.3	6.4	4.1	26.0
28.0	12.0	10.4	11.9	8.3	7.0	6.4	3.9	28.0
30.0	12.0	10.2	11.1	8.0	6.8	6.2	3.7	30.0
32.0	11.4	10.0	10.4	7.7	6.6	5.9	3.6	32.0
34.0	11.3 / 32.2	9.9 / 32.8	9.8	7.5	6.4	5.7	3.4	34.0
36.0			9.3	7.3	6.2	5.4	3.3	36.0
38.0			8.9 / 37.9	7.2	6.1	5.3	3.2	38.0
40.0				7.2 / 38.8	5.9	5.1	3.1	40.0
42.0					5.8	5.0	3.0	42.0
44.0					5.8 / 43.5	4.9	2.9	44.0
46.0						4.9 / 44.8	2.8	46.0
48.0							2.7	48.0
50.0							2.7 / 49.2	50.0
52.0							2.6 / 50.8	52.0

Unit: ton								
Boom length (m)	27							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.0	12.0 / 10.2							10.0
12.0	12.0	12.0 / 13.2	12.0 / 12.3					12.0
14.0	12.0	12.0	12.0		8.8 / 14.4			14.0
16.0	12.0	12.0	12.0	9.0 / 17.1	8.8		5.4 / 16.5	16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2	18.0
20.0	12.0	12.0	12.0	9.0	8.4	6.4 / 21.0	4.9	20.0
22.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	22.0
24.0	12.0	11.5	12.0	9.0	7.8	6.4	4.4	24.0
26.0	12.0	11.1	12.0	8.9	7.5	6.4	4.2	26.0
28.0	12.0	10.7	12.0	8.5	7.2	6.4	4.0	28.0
30.0	12.0	10.4	11.8	8.2	7.0	6.3	3.8	30.0
32.0	11.2	10.2	11.1	7.9	6.7	6.1	3.7	32.0
34.0	10.2	10.0	10.4	7.7	6.5	5.8	3.5	34.0
36.0	9.9 / 34.8	9.7 / 35.4	9.7	7.5	6.4	5.6	3.4	36.0
38.0			9.0	7.3	6.2	5.4	3.3	38.0
40.0			8.3	7.2	6.1	5.2	3.2	40.0
42.0			8.1 / 40.5	7.2 / 41.4	5.9	5.1	3.1	42.0
44.0					5.9	5.0	3.0	44.0
46.0					5.8	4.9	2.9	46.0
48.0					5.8 / 46.1	4.8 / 47.4	2.8	48.0
50.0							2.8	50.0
52.0							2.7 / 51.7	52.0
54.0							2.6 / 53.4	54.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	30							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
10.7	12.0							10.7
12.0	12.0	12.0 / 13.7	12.0 / 12.8					12.0
14.0	12.0	12.0	12.0		8.8 / 15.0			14.0
16.0	12.0	12.0	12.0	9.0 / 17.6	8.8		5.4 / 17.1	16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2	18.0
20.0	12.0	12.0	12.0	9.0	8.6	6.4 / 21.5	5.0	20.0
22.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7	22.0
24.0	12.0	11.8	12.0	9.0	7.9	6.4	4.5	24.0
26.0	12.0	11.4	12.0	9.0	7.6	6.4	4.3	26.0
28.0	12.0	11.0	12.0	8.7	7.4	6.4	4.1	28.0
30.0	12.0	10.7	12.0	8.4	7.1	6.4	3.9	30.0
32.0	11.0	10.4	11.4	8.1	6.9	6.2	3.8	32.0
34.0	10.0	10.1	10.4	7.9	6.7	6.0	3.6	34.0
36.0	9.2	9.3	9.5	7.7	6.5	5.8	3.5	36.0
38.0	8.6 / 37.4	8.5	8.8	7.5	6.3	5.6	3.4	38.0
40.0			8.1	7.3	6.2	5.4	3.2	40.0
42.0			7.5	7.2	6.1	5.2	3.1	42.0
44.0			7.2 / 43.1	7.0	6.0	5.1	3.0	44.0
46.0					5.9	5.0	3.0	46.0
48.0					5.8	4.9	2.9	48.0
50.0					5.8 / 48.7	4.8	2.8	50.0
52.0							2.8	52.0
54.0							2.7	54.0
56.0							2.7 / 54.3	56.0

Unit: ton								
Boom length (m)	33							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
10.7	12.0 / 11.3							10.7
12.0	12.0		12.0 / 13.4					12.0
14.0	12.0	12.0 / 14.3	12.0		8.8 / 15.5			14.0
16.0	12.0	12.0	12.0		8.8		5.4 / 17.6	16.0
18.0	12.0	12.0	12.0	9.0 / 18.2	8.8		5.3	18.0
20.0	12.0	12.0	12.0	9.0	8.7		5.0	20.0
22.0	12.0	12.0	12.0	9.0	8.4	6.4 / 22.1	4.8	22.0
24.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	24.0
26.0	12.0	11.7	12.0	9.0	7.8	6.4	4.4	26.0
28.0	12.0	11.3	12.0	8.9	7.5	6.4	4.2	28.0
30.0	11.9	11.0	12.0	8.6	7.3	6.4	4.0	30.0
32.0	10.8	10.7	11.2	8.3	7.0	6.4	3.9	32.0
34.0	9.9	10.0	10.2	8.1	6.8	6.1	3.7	34.0
36.0	9.0	9.2	9.4	7.9	6.7	5.9	3.6	36.0
38.0	8.3	8.4	8.6	7.7	6.5	5.7	3.5	38.0
40.0	7.6	7.7	7.9	7.5	6.3	5.5	3.3	40.0
42.0		7.5 / 40.6	7.3	7.3	6.2	5.3	3.2	42.0
44.0			6.8	6.9	6.1	5.2	3.1	44.0
46.0			6.3 / 45.7	6.4	6.0	5.1	3.0	46.0
48.0				6.2 / 46.6	5.9	5.0	3.0	48.0
50.0					5.6	4.9	2.9	50.0
52.0					5.4 / 51.3	4.8	2.8	52.0
54.0						4.8 / 52.6	2.8	54.0
56.0							2.7	56.0
58.0							2.7 / 56.9	58.0
60.0							2.6 / 58.6	60.0

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	36							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
11.8	12.0							
12.0	12.0		12.0 / 13.9					
14.0	12.0	12.0 / 14.8	12.0					
16.0	12.0	12.0	12.0		8.8			
18.0	12.0	12.0	12.0	9.0 / 18.7	8.8		5.4 / 18.1	
20.0	12.0	12.0	12.0	9.0	8.8		5.1	
22.0	12.0	12.0	12.0	9.0	8.5	6.4 / 22.6	4.9	
24.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7	
26.0	12.0	11.9	12.0	9.0	7.9	6.4	4.5	3.4 / 26.5
28.0	12.0	11.5	12.0	9.0	7.7	6.4	4.3	3.4
30.0	11.7	11.2	12.0	8.8	7.4	6.4	4.1	3.3
32.0	10.6	10.9	11.0	8.5	7.2	6.4	4.0	3.2
34.0	9.6	9.9	10.0	8.3	7.0	6.2	3.8	3.1
36.0	8.8	9.0	9.2	8.0	6.8	6.0	3.7	3.0
38.0	8.0	8.2	8.4	7.8	6.6	5.8	3.5	2.9
40.0	7.4	7.5	7.7	7.6	6.5	5.6	3.4	2.9
42.0	6.8	6.8	7.1	7.3	6.3	5.5	3.3	2.8
44.0	6.6 / 42.6	6.5 / 43.2	6.5	6.7	6.2	5.3	3.2	2.8
46.0			6.0	6.2	6.1	5.2	3.1	2.7
48.0			5.6	5.7	5.8	5.1	3.0	2.7
50.0			5.5 / 48.3	5.4 / 49.2	5.4	5.0	3.0	2.6
52.0					5.0	4.9	2.9	2.6
54.0					4.7 / 53.9	4.8	2.8	2.6
56.0						4.6 / 55.2	2.8	2.6
58.0							2.7	2.6
60.0							2.7 / 59.5	2.6
62.0								2.6 / 61.2

Unit: ton								
Boom length (m)	39							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
12.0	12.0 / 12.4							
14.0	12.0	12.0 / 15.4	12.0 / 14.5					
16.0	12.0	12.0	12.0		8.8 / 16.6			
18.0	12.0	12.0	12.0	9.0 / 19.3	8.8		5.3 / 18.7	
20.0	12.0	12.0	12.0	9.0	8.8		5.2	
22.0	12.0	12.0	12.0	9.0	8.6	6.4 / 23.2	5.0	
24.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	
26.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 / 27.1
28.0	12.0	11.8	12.0	9.0	7.8	6.4	4.4	3.4
30.0	11.5	11.4	11.9	8.9	7.6	6.4	4.2	3.3
32.0	10.4	10.7	10.8	8.7	7.3	6.4	4.0	3.2
34.0	9.4	9.7	9.8	8.4	7.1	6.4	3.9	3.1
36.0	8.5	8.8	8.9	8.2	6.9	6.1	3.8	3.0
38.0	7.8	8.0	8.2	8.0	6.8	5.9	3.6	3.0
40.0	7.1	7.3	7.5	7.8	6.6	5.8	3.5	2.9
42.0	6.5	6.6	6.9	7.1	6.4	5.6	3.4	2.8
44.0	6.0	6.1	6.3	6.5	6.3	5.4	3.3	2.8
46.0	5.7 / 45.2	5.6 / 45.8	5.8	6.0	6.1	5.3	3.2	2.7
48.0			5.3	5.5	5.6	5.2	3.1	2.7
50.0			4.9	5.0	5.2	5.1	3.0	2.7
52.0			4.8 / 50.9	4.7 / 51.8	4.8	5.0	3.0	2.6
54.0					4.4	4.6	2.9	2.6
56.0					4.1	4.2	2.8	2.6
58.0					4.0 / 56.5	3.9 / 57.8	2.8	2.6
60.0							2.7	2.6
62.0							2.7	2.6
64.0							2.7 / 62.1	2.6 / 63.8

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	42							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
12.9	12.0							
14.0	12.0	12.0 / 15.9	12.0 / 15.0					
16.0	12.0	12.0	12.0		8.8 / 17.1			
18.0	12.0	12.0	12.0	9.0 / 19.8	8.8		5.3 / 19.2	
20.0	12.0	12.0	12.0	9.0	8.8		5.2	
22.0	12.0	12.0	12.0	9.0	8.7	6.4 / 23.7	5.0	
24.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	
26.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 27.6
28.0	12.0	12.0	12.0	9.0	7.9	6.4	4.4	3.4
30.0	11.4	11.6	11.8	9.0	7.7	6.4	4.3	3.3
32.0	10.3	10.6	10.7	8.8	7.5	6.4	4.1	3.2
34.0	9.3	9.6	9.7	8.6	7.3	6.4	4.0	3.1
36.0	8.4	8.7	8.8	8.3	7.1	6.3	3.8	3.1
38.0	7.7	7.9	8.0	8.1	6.9	6.1	3.7	3.0
40.0	7.0	7.2	7.4	7.7	6.7	5.9	3.6	2.9
42.0	6.4	6.6	6.7	7.1	6.6	5.7	3.5	2.9
44.0	5.9	6.0	6.2	6.5	6.4	5.5	3.4	2.8
46.0	5.4	5.5	5.7	5.9	5.9	5.4	3.3	2.8
48.0	5.0 / 47.8	5.0	5.2	5.4	5.5	5.3	3.2	2.7
50.0		4.9 / 48.4	4.8	5.0	5.1	5.2	3.1	2.7
52.0			4.4	4.5	4.7	4.9	3.0	2.6
54.0			4.2 / 53.5	4.2	4.3	4.5	2.9	2.6
56.0				4.1 / 54.4	4.0	4.2	2.9	2.6
58.0					3.7	3.8	2.8	2.6
60.0					3.5 / 59.1	3.5	2.8	2.6
62.0						3.4 / 60.4	2.7	2.6
64.0							2.7	2.6
66.0							2.7 / 64.7	2.6
68.0								2.6 / 66.4

Unit: ton								
Boom length (m)	45							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
12.9	12.0 / 13.5							
14.0	12.0		12.0 / 15.6					
16.0	12.0	12.0 / 16.5	12.0		8.8 / 17.7			
18.0	12.0	12.0	12.0		8.8		5.3 / 19.8	
20.0	12.0	12.0	12.0	9.0 / 20.4	8.8		5.3	
22.0	12.0	12.0	12.0	9.0	8.8		5.1	
24.0	12.0	12.0	12.0	9.0	8.5	6.4 / 24.3	4.9	
26.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	
28.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 / 28.2
30.0	11.1	11.6	11.6	9.0	7.8	6.4	4.3	3.3
32.0	10.0	10.4	10.4	9.0	7.6	6.4	4.2	3.3
34.0	9.1	9.4	9.4	8.7	7.4	6.4	4.0	3.2
36.0	8.2	8.5	8.6	8.5	7.2	6.4	3.9	3.1
38.0	7.4	7.7	7.8	8.2	7.0	6.2	3.8	3.0
40.0	6.8	7.0	7.1	7.5	6.8	6.0	3.7	3.0
42.0	6.1	6.3	6.5	6.8	6.7	5.8	3.5	2.9
44.0	5.6	5.7	5.9	6.2	6.2	5.7	3.4	2.8
46.0	5.1	5.2	5.4	5.7	5.7	5.5	3.3	2.8
48.0	4.7	4.7	5.0	5.2	5.2	5.4	3.3	2.7
50.0	4.2	4.3	4.6	4.8	4.8	5.2	3.2	2.7
52.0	4.2 / 50.4	4.1 / 51.0	4.2	4.3	4.4	4.7	3.1	2.7
54.0			3.8	3.9	4.1	4.3	3.0	2.6
56.0			3.5	3.6	3.7	4.0	2.9	2.6
58.0			3.5 / 56.1	3.4 / 57.0	3.4	3.6	2.9	2.6
60.0					3.1	3.3	2.8	2.6
62.0					2.9 / 61.7	3.0	2.8	2.6
64.0						2.8 / 63.0	2.7	2.6
66.0							2.6	2.6
68.0							2.4 / 67.3	2.5
70.0								2.3 / 69.0

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	48							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0							
16.0	12.0	12.0 / 17.0	12.0 / 16.1					
18.0	12.0	12.0	12.0		8.8 / 18.2			
20.0	12.0	12.0	12.0	9.0 / 20.9	8.8		5.3 / 20.3	
22.0	12.0	12.0	12.0	9.0	8.8		5.1	
24.0	12.0	12.0	12.0	9.0	8.6	6.4 / 24.8	4.9	
26.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	
28.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	3.4 / 28.7
30.0	11.1	11.5	11.5	9.0	7.9	6.4	4.4	3.4
32.0	9.9	10.3	10.3	9.0	7.7	6.4	4.3	3.3
34.0	9.0	9.3	9.3	8.8	7.5	6.4	4.1	3.2
36.0	8.1	8.4	8.5	8.6	7.3	6.4	4.0	3.1
38.0	7.3	7.6	7.7	8.2	7.1	6.3	3.9	3.1
40.0	6.7	6.9	7.0	7.4	7.0	6.1	3.7	3.0
42.0	6.1	6.3	6.4	6.8	6.7	5.9	3.6	2.9
44.0	5.5	5.7	5.8	6.2	6.1	5.8	3.5	2.9
46.0	5.0	5.1	5.3	5.6	5.6	5.6	3.4	2.8
48.0	4.5	4.7	4.9	5.1	5.1	5.5	3.3	2.8
50.0	4.1	4.2	4.4	4.7	4.7	5.1	3.2	2.7
52.0	3.8	3.8	4.1	4.3	4.3	4.6	3.2	2.7
54.0	3.6 / 53.0	3.5 / 53.6	3.7	3.9	3.9	4.3	3.1	2.7
56.0			3.4	3.5	3.6	3.9	3.0	2.6
58.0			3.1	3.2	3.3	3.5	2.9	2.6
60.0			3.0 / 58.7	2.9 / 59.6	3.0	3.2	2.9	2.6
62.0					2.7	2.9	2.8	2.6
64.0					2.5	2.6	2.7	2.6
66.0					2.5 / 64.3	2.4 / 65.6	2.4	2.6
68.0							2.2	2.4
70.0							2.0 / 69.9	2.2
72.0							2.0 / 71.6	2.2

Unit: ton								
Boom length (m)	51							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0 / 14.6							
16.0	12.0	12.0 / 17.6	12.0 / 16.7					
18.0	12.0	12.0	12.0		8.8 / 18.8			
20.0	12.0	12.0	12.0	9.0 / 21.5	8.8		5.3 / 20.9	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.7	6.4 / 25.4	5.0	
26.0	12.0	12.0	12.0	9.0	8.5	6.4	4.8	
28.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 29.3
30.0	10.9	11.4	11.3	9.0	8.0	6.4	4.5	3.4
32.0	9.8	10.2	10.2	9.0	7.8	6.4	4.3	3.3
34.0	8.8	9.2	9.2	9.0	7.6	6.4	4.2	3.2
36.0	7.9	8.3	8.3	8.7	7.4	6.4	4.0	3.1
38.0	7.2	7.5	7.5	8.0	7.2	6.4	3.9	3.1
40.0	6.5	6.8	6.9	7.3	7.1	6.2	3.8	3.0
42.0	5.9	6.1	6.2	6.6	6.5	6.0	3.7	2.9
44.0	5.3	5.5	5.7	6.0	5.9	5.9	3.6	2.9
46.0	4.8	5.0	5.2	5.5	5.4	5.7	3.5	2.8
48.0	4.4	4.5	4.7	5.0	5.0	5.4	3.4	2.8
50.0	4.0	4.1	4.3	4.5	4.5	5.0	3.3	2.7
52.0	3.6	3.7	3.9	4.1	4.1	4.5	3.2	2.7
54.0	3.2	3.3	3.5	3.7	3.8	4.1	3.1	2.7
56.0	3.0 / 55.6	3.0	3.2	3.4	3.4	3.8	3.1	2.6
58.0		2.9 / 56.2	2.9	3.0	3.1	3.4	3.0	2.6
60.0			2.6	2.7	2.8	3.1	2.9	2.6
62.0			2.4 / 61.3	2.4	2.6	2.8	2.8	2.6
64.0				2.4 / 62.2	2.3	2.5	2.5	2.6
66.0					2.1	2.2	2.3	2.5
68.0					2.0 / 66.9	2.0	2.1	2.3
70.0						1.9 / 68.2	1.9 / 69.3	2.0
72.0							1.9 / 71.0	2.0

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0							
16.0	12.0		12.0 / 17.2					
18.0	12.0	12.0 / 18.1	12.0		8.8 / 19.3			
20.0	12.0	12.0	12.0		8.8		5.3 / 21.4	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.8	6.4 / 25.9	5.0	
26.0	12.0	12.0	12.0	9.0	8.6	6.4	4.9	
28.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	3.4 / 29.8
30.0	10.7	11.2	11.1	9.0	8.1	6.4	4.5	3.4
32.0	9.5	10.0	9.9	9.0	7.9	6.4	4.4	3.3
34.0	8.6	9.0	9.0	9.0	7.7	6.4	4.2	3.2
36.0	7.7	8.1	8.1	8.7	7.5	6.4	4.1	3.2
38.0	6.9	7.2	7.3	7.8	7.3	6.4	4.0	3.1
40.0	6.2	6.5	6.6	7.1	6.9	6.3	3.9	3.0
42.0	5.6	5.9	6.0	6.4	6.3	6.1	3.8	3.0
44.0	5.1	5.3	5.4	5.8	5.7	5.9	3.6	2.9
46.0	4.6	4.8	4.9	5.3	5.2	5.7	3.5	2.9
48.0	4.1	4.3	4.5	4.8	4.7	5.2	3.5	2.8
50.0	3.7	3.9	4.0	4.3	4.3	4.8	3.4	2.8
52.0	3.3	3.5	3.6	3.9	3.9	4.3	3.3	2.7
54.0	3.0	3.1	3.3	3.5	3.5	3.9	3.2	2.7
56.0	2.7	2.7	3.0	3.2	3.2	3.5	3.1	2.7
58.0	2.4	2.4	2.7	2.8	2.9	3.2	3.1	2.6
60.0	2.3 / 58.2	2.3 / 58.8	2.4	2.5	2.6	2.9	2.8	2.6
62.0			2.1	2.2	2.3	2.6	2.5	2.6
64.0			1.9 / 63.9	1.9	2.1	2.3	2.3	2.6
66.0					1.9	2.0	2.0	2.3
68.0						1.9 / 67.0	1.9 / 67.0	2.1
70.0								1.9 / 69.3

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0 / 15.7							
16.0	12.0		12.0 / 17.8					
18.0	12.0	12.0 / 18.7	12.0		8.8 / 19.9			
20.0	12.0	12.0	12.0		8.8			
22.0	12.0	12.0	12.0	9.0 / 22.6	8.8		5.3	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.7	6.4 / 26.5	4.9	
28.0	11.8	12.0	12.0	9.0	8.4	6.4	4.8	
30.0	10.5	11.0	10.9	9.0	8.2	6.4	4.6	3.4 / 30.4
32.0	9.4	9.8	9.8	9.0	8.0	6.4	4.4	3.3
34.0	8.4	8.8	8.8	9.0	7.8	6.4	4.3	3.3
36.0	7.5	7.9	7.9	8.5	7.6	6.4	4.2	3.2
38.0	6.8	7.1	7.1	7.7	7.4	6.4	4.0	3.1
40.0	6.1	6.4	6.4	7.0	6.7	6.4	3.9	3.1
42.0	5.5	5.7	5.8	6.3	6.1	6.2	3.8	3.0
44.0	4.9	5.2	5.3	5.7	5.5	6.0	3.7	2.9
46.0	4.4	4.6	4.7	5.1	5.0	5.6	3.6	2.9
48.0	4.0	4.2	4.3	4.6	4.6	5.1	3.5	2.8
50.0	3.5	3.7	3.9	4.2	4.1	4.6	3.4	2.8
52.0	3.2	3.3	3.5	3.8	3.7	4.2	3.3	2.7
54.0	2.8	2.9	3.1	3.4	3.4	3.8	3.3	2.7
56.0	2.5	2.6	2.8	3.0	3.0	3.4	3.2	2.7
58.0	2.2	2.3	2.5	2.7	2.7	3.1	2.9	2.6
60.0	1.9	2.0	2.2	2.4	2.4	2.7	2.6	2.6
62.0		1.9 / 60.7	1.9	2.1	2.2	2.4	2.4	2.6
64.0				1.9 / 63.3	1.9	2.2	2.1	2.5
66.0						1.9	1.9	2.2
68.0								2.0
70.0								1.9 / 68.6

■ Crane Jib (With Tower Boom Extensions)



Unit: ton

Boom length (m)	60								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
16.2	12.0								16.2
18.0	12.0	12.0 / 19.2	12.0 / 18.3						18.0
20.0	12.0	12.0	12.0		8.8 / 20.4				20.0
22.0	12.0	12.0	12.0	9.0 / 23.1	8.8		5.3 / 22.5		22.0
24.0	12.0	12.0	12.0	9.0	8.8		5.1		24.0
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.0	5.0		26.0
28.0	11.8	12.0	12.0	9.0	8.5	6.4	4.8		28.0
30.0	10.5	11.0	10.9	9.0	8.3	6.4	4.6	3.4 / 30.9	30.0
32.0	9.3	9.8	9.7	9.0	8.1	6.4	4.5	3.3	32.0
34.0	8.3	8.8	8.7	9.0	7.9	6.4	4.4	3.3	34.0
36.0	7.5	7.9	7.8	8.5	7.7	6.4	4.2	3.2	36.0
38.0	6.7	7.1	7.1	7.7	7.4	6.4	4.1	3.1	38.0
40.0	6.0	6.3	6.4	6.9	6.7	6.4	4.0	3.1	40.0
42.0	5.4	5.7	5.7	6.2	6.0	6.3	3.9	3.0	42.0
44.0	4.8	5.1	5.2	5.6	5.5	6.1	3.8	3.0	44.0
46.0	4.3	4.6	4.7	5.1	4.9	5.6	3.7	2.9	46.0
48.0	3.9	4.1	4.2	4.6	4.5	5.0	3.6	2.9	48.0
50.0	3.5	3.6	3.8	4.1	4.0	4.6	3.5	2.8	50.0
52.0	3.1	3.2	3.4	3.7	3.6	4.1	3.4	2.8	52.0
54.0	2.7	2.9	3.0	3.3	3.3	3.7	3.3	2.7	54.0
56.0	2.4	2.5	2.7	2.9	2.9	3.3	3.1	2.7	56.0
58.0	2.1	2.2	2.4	2.6	2.6	3.0	2.8	2.7	58.0
60.0	1.9 / 59.3	1.9	2.1	2.3	2.3	2.7	2.5	2.6	60.0
62.0			1.9 / 61.3	2.0	2.1	2.4	2.3	2.6	62.0
64.0				1.9 / 62.6	1.9 / 63.3	2.1	2.0	2.4	64.0
66.0						1.9 / 65.3	1.9 / 65.0	2.1	66.0
68.0								1.9	68.0

Unit: ton

Boom length (m)	63								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
16.2	12.0 / 16.8								16.2
18.0	12.0	12.0 / 19.8	12.0 / 18.9						18.0
20.0	12.0	12.0	12.0		8.8 / 21.0				20.0
22.0	12.0	12.0	12.0	9.0 / 23.7	8.8		5.3 / 23.1		22.0
24.0	12.0	12.0	12.0	9.0	8.8		5.2		24.0
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.5	5.0		26.0
28.0	11.5	12.0	12.0	9.0	8.6	6.4	4.9		28.0
30.0	10.2	10.8	10.6	9.0	8.4	6.4	4.7	3.4 / 31.4	30.0
32.0	9.1	9.6	9.5	9.0	8.2	6.4	4.6	3.4	32.0
34.0	8.1	8.6	8.5	9.0	8.0	6.4	4.4	3.3	34.0
36.0	7.2	7.7	7.6	8.3	7.8	6.4	4.3	3.2	36.0
38.0	6.5	6.8	6.8	7.5	7.1	6.4	4.2	3.2	38.0
40.0	5.8	6.1	6.1	6.7	6.4	6.4	4.0	3.1	40.0
42.0	5.2	5.5	5.5	6.0	5.8	6.4	3.9	3.0	42.0
44.0	4.6	4.9	4.9	5.4	5.2	5.9	3.8	3.0	44.0
46.0	4.1	4.4	4.4	4.9	4.7	5.4	3.7	2.9	46.0
48.0	3.6	3.9	4.0	4.4	4.2	4.8	3.6	2.9	48.0
50.0	3.2	3.4	3.5	3.9	3.8	4.4	3.5	2.8	50.0
52.0	2.8	3.0	3.1	3.5	3.4	3.9	3.5	2.8	52.0
54.0	2.5	2.6	2.8	3.1	3.0	3.5	3.3	2.7	54.0
56.0	2.1	2.3	2.4	2.7	2.7	3.1	2.9	2.7	56.0
58.0	1.9 / 57.3	2.0	2.1	2.4	2.4	2.8	2.6	2.7	58.0
60.0		1.9 / 58.6	1.9 / 59.3	2.1	2.1	2.5	2.3	2.7	60.0
62.0				1.9 / 61.3	1.9 / 61.3	2.2	2.0	2.5	62.0
64.0						1.9	1.9 / 63.0	2.2	64.0
66.0								1.9	66.0

■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton

Boom length (m)	24								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
6.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.2	73.9	73.7	73.2	73.1	72.3	72.4	71.4	8.0
9.0	63.5	63.1	62.8	62.1	62.0	61.0	61.1	59.6	9.0
10.0	54.1	53.8	53.4	52.9	52.7	51.8	51.8	50.6	10.0
12.0	41.4	41.1	40.7	40.3	40.0	39.4	39.2	38.3	12.0
14.0	33.1	32.9	32.5	32.2	31.8	31.4	31.0	30.4	14.0
16.0	27.4	27.2	26.8	26.5	26.1	25.8	25.4	24.9	16.0
18.0	23.1	23.0	22.5	22.4	21.9	21.6	21.2	20.8	18.0
20.0	19.8	19.8	19.3	19.2	18.6	18.5	18.0	17.7	20.0
22.0	17.2	17.2	16.7	16.6	16.1	16.0	15.4	15.3	22.0
24.0	16.9 / 22.3	16.9 / 22.3	16.4 / 22.3	16.3 / 22.3	15.8 / 22.3	15.7 / 22.3	15.1 / 22.3	15.0 / 22.3	24.0

Unit: ton

Boom length (m)	27								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
6.3	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	80.0 / 6.8	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.0	73.7	73.5	73.0	73.0	72.2	72.3	71.2	8.0
9.0	63.5	63.1	62.8	62.1	62.0	61.0	61.2	59.7	9.0
10.0	54.1	53.7	53.4	52.8	52.7	51.8	51.9	50.6	10.0
12.0	41.3	41.0	40.7	40.2	40.0	39.3	39.2	38.3	12.0
14.0	33.0	32.8	32.5	32.1	31.8	31.3	31.1	30.4	14.0
16.0	27.3	27.1	26.7	26.4	26.1	25.7	25.4	24.8	16.0
18.0	23.0	22.9	22.4	22.2	21.8	21.5	21.1	20.8	18.0
20.0	19.7	19.6	19.2	19.0	18.6	18.4	17.9	17.6	20.0
22.0	17.1	17.0	16.6	16.5	16.0	15.9	15.4	15.2	22.0
24.0	15.0	15.0	14.5	14.4	13.9	13.9	13.3	13.2	24.0
26.0	14.2 / 24.9	14.2 / 24.9	13.7 / 24.9	13.6 / 24.9	13.1 / 24.9	13.1 / 24.9	12.5 / 24.9	12.4 / 24.9	26.0

- The rated loads determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The offset angles shown are of jib boom offset angle against the main boom, under load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12

Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton

Boom length (m)	30								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
7.4	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0 / 7.4	7.4
8.0	72.0	72.0	72.0	72.0	72.0	71.1	71.2	69.6	8.0
9.0	63.4	63.0	62.8	62.0	62.0	60.9	61.1	59.7	9.0
10.0	54.0	53.6	53.4	52.8	52.7	51.7	51.9	50.6	10.0
12.0	41.2	40.9	40.6	40.2	40.0	39.3	39.2	38.3	12.0
14.0	32.9	32.7	32.4	32.0	31.8	31.2	31.1	30.3	14.0
16.0	27.2	27.0	26.6	26.3	26.0	25.6	25.3	24.8	16.0
18.0	22.9	22.7	22.4	22.1	21.8	21.4	21.1	20.7	18.0
20.0	19.6	19.5	19.1	18.9	18.5	18.3	17.9	17.5	20.0
22.0	17.0	16.9	16.5	16.4	15.9	15.7	15.3	15.1	22.0
24.0	14.9	14.8	14.4	14.3	13.8	13.7	13.2	13.1	24.0
26.0	13.1	13.1	12.7	12.6	12.1	12.0	11.5	11.4	26.0
28.0	12.0 / 27.5	12.0 / 27.5	11.6 / 27.5	11.5 / 27.5	11.0 / 27.5	11.0 / 27.5	10.5 / 27.5	10.4 / 27.5	28.0

Unit: ton

Boom length (m)	33								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30	Offset angle (deg) Radius (m)
7.4	72.0 / 7.9	72.0 / 7.9	72.0 / 7.9	71.9 / 7.9	71.8 / 7.9	70.6 / 7.9	70.8 / 7.9	69.2 / 7.9	7.4
8.0	72.0	71.9	71.6	70.8	70.7	69.5	69.7	68.0	8.0
9.0	62.5	62.1	61.7	61.1	60.9	59.9	59.9	58.5	9.0
10.0	54.0	53.6	53.4	52.7	52.7	51.7	51.9	50.6	10.0
12.0	41.2	40.9	40.6	40.1	40.0	39.3	39.3	38.3	12.0
14.0	32.9	32.7	32.4	32.0	31.7	31.2	31.1	30.3	14.0
16.0	27.1	26.9	26.6	26.3	26.0	25.6	25.4	24.7	16.0
18.0	22.8	22.7	22.3	22.1	21.7	21.4	21.1	20.6	18.0
20.0	19.5	19.4	19.0	18.8	18.5	18.2	17.9	17.5	20.0
22.0	16.9	16.8	16.4	16.3	15.9	15.7	15.3	15.0	22.0
24.0	14.8	14.7	14.3	14.2	13.8	13.6	13.2	13.0	24.0
26.0	13.1	13.0	12.6	12.5	12.1	12.0	11.5	11.3	26.0
28.0	11.6	11.6	11.2	11.1	10.7	10.6	10.1	10.0	28.0
30.0	10.4	10.3	9.9	9.9	9.4	9.4	8.9	8.8	30.0
32.0	10.3 / 30.1	10.3 / 30.1	9.9 / 30.1	9.8 / 30.1	9.4 / 30.1	9.3 / 30.1	8.8 / 30.1	8.8 / 30.1	32.0

■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	36							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
8.5	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
9.0	60.0	60.0	60.0	59.6	59.5	58.5	58.6	57.2
10.0	53.6	53.3	52.9	52.3	52.1	51.3	51.3	50.1
12.0	41.1	40.8	40.5	40.0	39.9	39.2	39.2	38.2
14.0	32.8	32.5	32.2	31.9	31.7	31.1	31.0	30.2
16.0	27.0	26.8	26.5	26.1	25.9	25.4	25.3	24.6
18.0	22.7	22.5	22.2	21.9	21.6	21.3	21.0	20.5
20.0	19.4	19.3	18.9	18.7	18.4	18.1	17.8	17.4
22.0	16.8	16.7	16.3	16.1	15.8	15.5	15.2	14.9
24.0	14.7	14.6	14.2	14.0	13.7	13.5	13.1	12.8
26.0	12.9	12.8	12.4	12.3	11.9	11.8	11.4	11.2
28.0	11.4	11.4	11.0	10.9	10.5	10.4	9.9	9.8
30.0	10.2	10.1	9.7	9.7	9.3	9.2	8.7	8.6
32.0	9.1	9.1	8.7	8.6	8.2	8.1	7.7	7.6
34.0	8.8 /32.7	8.7 /32.7	8.3 /32.7	8.3 /32.7	7.9 /32.7	7.8 /32.7	7.3 /32.7	7.3 /32.7

Unit: ton								
Boom length (m)	39							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
9.0	59.7	59.3	59.0	58.3	58.2	57.2	57.3	55.9
10.0	52.5	52.1	51.8	51.2	51.1	50.2	50.2	49.0
12.0	40.9	40.6	40.3	39.8	39.7	39.0	39.1	38.0
14.0	32.6	32.3	32.1	31.7	31.5	30.9	30.9	30.0
16.0	26.8	26.6	26.3	25.9	25.7	25.2	25.1	24.4
18.0	22.5	22.3	22.0	21.7	21.5	21.1	20.9	20.3
20.0	19.2	19.0	18.7	18.5	18.2	17.8	17.6	17.2
22.0	16.6	16.4	16.1	15.9	15.6	15.3	15.0	14.6
24.0	14.4	14.3	14.0	13.8	13.5	13.2	12.9	12.6
26.0	12.7	12.6	12.2	12.1	11.7	11.5	11.2	10.9
28.0	11.2	11.1	10.8	10.7	10.3	10.1	9.8	9.5
30.0	9.9	9.9	9.5	9.4	9.0	8.9	8.5	8.4
32.0	8.9	8.8	8.4	8.4	8.0	7.9	7.5	7.4
34.0	7.9	7.9	7.5	7.5	7.1	7.0	6.6	6.5
36.0	7.4 /35.3	7.4 /35.3	7.0 /35.3	6.9 /35.3	6.5 /35.3	6.5 /35.3	6.0 /35.3	6.0 /35.3

Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	42							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
9.6	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0
10.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0
12.0	40.9	40.6	40.4	39.9	39.8	39.0	39.1	38.1
14.0	32.6	32.3	32.1	31.7	31.5	30.9	30.9	30.1
16.0	26.8	26.6	26.3	25.9	25.7	25.2	25.1	24.5
18.0	22.5	22.3	22.0	21.7	21.5	21.1	20.9	20.3
20.0	19.1	19.0	18.7	18.5	18.2	17.8	17.6	17.2
22.0	16.5	16.4	16.1	15.9	15.6	15.3	15.0	14.6
24.0	14.4	14.3	14.0	13.8	13.5	13.2	12.9	12.6
26.0	12.6	12.6	12.2	12.1	11.7	11.5	11.2	10.9
28.0	11.2	11.1	10.7	10.6	10.3	10.1	9.7	9.5
30.0	9.9	9.8	9.5	9.4	9.0	8.9	8.5	8.3
32.0	8.8	8.8	8.4	8.3	7.9	7.8	7.4	7.3
34.0	7.9	7.8	7.5	7.4	7.0	6.9	6.5	6.4
36.0	7.1	7.0	6.6	6.6	6.2	6.1	5.7	5.6
38.0	6.4 /37.9	6.3 /37.9	6.0 /37.9	5.9 /37.9	5.5 /37.9	5.5 /37.9	5.1 /37.9	5.0 /37.9

Unit: ton								
Boom length (m)	45							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
10.0	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	47.5 /10.1	47.5 /10.1	46.3 /10.1
12.0	40.4	40.1	39.7	39.3	39.1	38.4	38.3	37.3
14.0	32.4	32.1	31.9	31.5	31.3	30.7	30.7	29.9
16.0	26.5	26.3	26.1	25.7	25.5	25.0	25.0	24.3
18.0	22.2	22.1	21.8	21.5	21.3	20.8	20.7	20.1
20.0	18.9	18.8	18.5	18.2	18.0	17.6	17.4	16.9
22.0	16.3	16.2	15.9	15.6	15.4	15.1	14.8	14.4
24.0	14.2	14.1	13.7	13.6	13.3	13.0	12.7	12.4
26.0	12.4	12.3	12.0	11.8	11.5	11.3	11.0	10.7
28.0	10.9	10.8	10.5	10.4	10.0	9.8	9.5	9.3
30.0	9.7	9.6	9.2	9.1	8.8	8.6	8.3	8.1
32.0	8.6	8.5	8.2	8.1	7.7	7.6	7.2	7.0
34.0	7.6	7.6	7.2	7.1	6.8	6.7	6.3	6.2
36.0	6.8	6.8	6.4	6.3	6.0	5.9	5.5	5.4
38.0	6.1	6.0	5.7	5.6	5.2	5.2	4.8	4.7
40.0	5.4	5.4	5.0	5.0	4.6	4.6	4.1	4.1
42.0	5.3 /40.5	5.2 /40.5	4.9 /40.5	4.9 /40.5	4.5 /40.5	4.4 /40.5	4.0 /40.5	4.0 /40.5

Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	48							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)								
10.6	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0
14.0	32.4	32.1	31.9	31.5	31.4	30.7	30.8	29.9
16.0	26.5	26.3	26.1	25.7	25.6	25.0	25.0	24.3
18.0	22.2	22.0	21.8	21.5	21.3	20.8	20.7	20.1
20.0	18.9	18.8	18.5	18.2	18.0	17.6	17.4	16.9
22.0	16.3	16.1	15.8	15.6	15.4	15.0	14.8	14.4
24.0	14.1	14.0	13.7	13.5	13.2	13.0	12.7	12.4
26.0	12.4	12.3	12.0	11.8	11.5	11.3	11.0	10.7
28.0	10.9	10.8	10.5	10.3	10.0	9.8	9.5	9.2
30.0	9.6	9.5	9.2	9.1	8.8	8.6	8.3	8.0
32.0	8.5	8.5	8.1	8.0	7.7	7.5	7.2	7.0
34.0	7.6	7.5	7.2	7.1	6.7	6.6	6.3	6.1
36.0	6.7	6.7	6.3	6.3	5.9	5.8	5.5	5.3
38.0	6.0	6.0	5.6	5.6	5.2	5.1	4.7	4.6
40.0	5.4	5.3	5.0	4.9	4.5	4.5	4.1	4.0
42.0	4.8	4.7	4.4	4.3	4.0	3.9	3.5	3.5
44.0	4.5 / 43.1	4.4 / 43.1	4.1 / 43.1	4.1 / 43.1	3.7 / 43.1	3.6 / 43.1	3.2 / 43.1	3.2 / 43.1

Unit: ton								
Boom length (m)	51							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)								
10.6	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2	36.0 / 11.2
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	35.9
14.0	32.2	31.9	31.6	31.2	31.0	30.4	30.3	29.5
16.0	26.4	26.2	26.0	25.6	25.5	24.9	24.9	24.2
18.0	22.1	21.9	21.7	21.4	21.2	20.7	20.6	20.0
20.0	18.8	18.6	18.3	18.1	17.9	17.5	17.4	16.8
22.0	16.2	16.0	15.7	15.5	15.3	14.9	14.7	14.3
24.0	14.0	13.9	13.6	13.4	13.1	12.8	12.6	12.2
26.0	12.2	12.1	11.8	11.7	11.4	11.1	10.9	10.5
28.0	10.8	10.7	10.4	10.2	9.9	9.7	9.4	9.1
30.0	9.5	9.4	9.1	9.0	8.6	8.5	8.2	7.9
32.0	8.4	8.3	8.0	7.9	7.6	7.4	7.1	6.9
34.0	7.4	7.4	7.0	6.9	6.6	6.5	6.2	6.0
36.0	6.6	6.6	6.2	6.1	5.8	5.7	5.3	5.2
38.0	5.9	5.8	5.5	5.4	5.1	5.0	4.6	4.5
40.0	5.2	5.2	4.8	4.8	4.4	4.3	4.0	3.9
42.0	4.6	4.6	4.2	4.2	3.8	3.8	3.4	3.3
44.0	4.1	4.1	3.7	3.7	3.3	3.3	2.9	2.8
46.0	3.7 / 45.7	3.7 / 45.7	3.3 / 45.7	3.3 / 45.7	2.9 / 45.7	2.9 / 45.7	2.5 / 45.7	2.5 / 45.7

Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
11.7	36.0	36.0	36.0	36.0	36.0	36.0	35.7	35.5
12.0	36.0	36.0	36.0	36.0	36.0	36.0	35.3	35.1
14.0	31.5	31.2	30.9	30.5	30.3	29.7	29.6	28.8
16.0	26.2	26.0	25.8	25.4	25.3	24.7	24.7	24.0
18.0	21.9	21.7	21.4	21.1	21.0	20.5	20.4	19.8
20.0	18.6	18.4	18.1	17.9	17.7	17.3	17.1	16.6
22.0	15.9	15.8	15.5	15.3	15.0	14.7	14.5	14.1
24.0	13.8	13.7	13.4	13.2	12.9	12.6	12.4	12.0
26.0	12.0	11.9	11.6	11.4	11.2	10.9	10.7	10.3
28.0	10.5	10.4	10.1	10.0	9.7	9.4	9.2	8.9
30.0	9.2	9.2	8.8	8.7	8.4	8.2	7.9	7.7
32.0	8.1	8.1	7.8	7.6	7.3	7.2	6.9	6.6
34.0	7.2	7.1	6.8	6.7	6.4	6.2	5.9	5.7
36.0	6.4	6.3	6.0	5.9	5.6	5.4	5.1	4.9
38.0	5.6	5.6	5.2	5.2	4.8	4.7	4.4	4.2
40.0	5.0	4.9	4.6	4.5	4.2	4.1	3.7	3.6
42.0	4.4	4.3	4.0	3.9	3.6	3.5	3.2	3.0
44.0	3.8	3.8	3.5	3.4	3.1	3.0	2.6	2.6
46.0	3.4	3.3	3.0	3.0	2.6	2.5	2.2	2.1
48.0	2.9	2.9	2.6	2.5	2.2	2.1	1.9 /47.5	1.9 /47.0
50.0	2.9 /48.3	2.8 /48.3	2.5 /48.3	2.5 /48.3	2.1 /48.3	2.1 /48.3		50.0

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg) Radius (m)	10	30	10	30	10	30	10	30
12.0	35.0 /12.3	35.0 /12.3	34.0 /12.3	33.9 /12.3	32.8 /12.3	32.7 /12.3	31.5 /12.3	31.3 /12.3
14.0	30.9	30.6	30.3	29.9	29.7	29.1	29.0	28.2
16.0	26.1	25.9	25.5	25.2	25.0	24.4	24.3	23.6
18.0	21.7	21.6	21.3	21.0	20.8	20.4	20.3	19.7
20.0	18.4	18.3	18.0	17.7	17.5	17.1	17.0	16.5
22.0	15.8	15.6	15.4	15.1	14.9	14.6	14.4	13.9
24.0	13.6	13.5	13.2	13.0	12.8	12.5	12.3	11.9
26.0	11.9	11.8	11.5	11.3	11.0	10.8	10.6	10.2
28.0	10.4	10.3	10.0	9.8	9.5	9.3	9.1	8.8
30.0	9.1	9.0	8.7	8.6	8.3	8.1	7.8	7.5
32.0	8.0	7.9	7.6	7.5	7.2	7.0	6.7	6.5
34.0	7.0	7.0	6.7	6.5	6.2	6.1	5.8	5.6
36.0	6.2	6.1	5.8	5.7	5.4	5.3	5.0	4.8
38.0	5.5	5.4	5.1	5.0	4.7	4.6	4.2	4.1
40.0	4.8	4.8	4.4	4.4	4.0	3.9	3.6	3.4
42.0	4.2	4.2	3.8	3.8	3.4	3.4	3.0	2.9
44.0	3.7	3.6	3.3	3.3	2.9	2.8	2.5	2.4
46.0	3.2	3.2	2.8	2.8	2.4	2.4	2.0	1.9
48.0	2.8	2.7	2.4	2.4	2.0	2.0	1.9 /46.5	
50.0	2.4	2.4	2.0	2.0	1.9 /48.5	1.9 /48.5		50.0
52.0	2.2 /50.9	2.2 /50.9	1.9 /50.9	1.9 /50.4				52.0

Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	60							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)								
12.9	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
14.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
16.0	24.0	24.0	24.0	24.0	24.0	23.9	23.8	23.1
18.0	21.8	21.6	21.3	21.0	20.8	20.4	20.2	19.6
20.0	18.4	18.3	18.0	17.7	17.5	17.1	17.1	16.5
22.0	15.8	15.6	15.4	15.1	14.9	14.6	14.4	13.9
24.0	13.6	13.5	13.2	13.0	12.8	12.5	12.3	11.9
26.0	11.8	11.7	11.4	11.3	11.0	10.7	10.5	10.2
28.0	10.3	10.2	9.9	9.8	9.5	9.3	9.1	8.7
30.0	9.1	9.0	8.7	8.5	8.2	8.0	7.8	7.5
32.0	8.0	7.9	7.6	7.4	7.2	7.0	6.7	6.4
34.0	7.0	6.9	6.6	6.5	6.2	6.0	5.8	5.5
36.0	6.1	6.1	5.8	5.7	5.4	5.2	4.9	4.7
38.0	5.4	5.3	5.0	4.9	4.6	4.5	4.2	4.0
40.0	4.7	4.7	4.4	4.3	4.0	3.8	3.5	3.4
42.0	4.1	4.1	3.8	3.7	3.4	3.3	2.9	2.8
44.0	3.6	3.5	3.2	3.2	2.8	2.7	2.4	2.3
46.0	3.1	3.1	2.7	2.7	2.4	2.3	1.9	1.9 /45.6
48.0	2.7	2.6	2.3	2.3	1.9	1.9		
50.0	2.3	2.2	1.9	1.9				
52.0	1.9	1.9						

Unit: ton								
Boom length (m)	63							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)								
12.9	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	23.6 /13.5	23.4 /13.5
14.0	24.0	24.0	24.0	24.0	24.0	24.0	23.2	23.0
16.0	24.0	24.0	23.4	23.4	22.4	22.4	21.4	21.4
18.0	21.3	21.1	20.8	20.5	20.3	19.8	19.7	19.1
20.0	18.2	18.0	17.8	17.5	17.3	16.9	16.8	16.3
22.0	15.5	15.4	15.1	14.9	14.7	14.3	14.2	13.7
24.0	13.4	13.3	13.0	12.8	12.6	12.2	12.1	11.6
26.0	11.6	11.5	11.2	11.0	10.8	10.5	10.3	9.9
28.0	10.1	10.0	9.7	9.5	9.3	9.0	8.8	8.5
30.0	8.8	8.7	8.4	8.3	8.0	7.8	7.6	7.3
32.0	7.7	7.6	7.3	7.2	6.9	6.7	6.5	6.2
34.0	6.8	6.7	6.4	6.2	6.0	5.8	5.5	5.3
36.0	5.9	5.8	5.5	5.4	5.1	5.0	4.7	4.5
38.0	5.2	5.1	4.8	4.7	4.4	4.2	4.0	3.8
40.0	4.5	4.4	4.1	4.0	3.7	3.6	3.3	3.1
42.0	3.9	3.8	3.5	3.4	3.1	3.0	2.7	2.6
44.0	3.3	3.3	3.0	2.9	2.6	2.5	2.2	2.0
46.0	2.9	2.8	2.5	2.4	2.1	2.0	1.9 /45.2	1.9 /44.5
48.0	2.4	2.4	2.1	2.0	1.9 /47.0	1.9 /46.5		
50.0	2.0	2.0	1.9 /49.0	1.9 /48.5				
52.0	1.9 /50.5	1.9 /50.5						

Main Boom (Using Third Winch) (With Tower Boom Extensions)



Working Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius (m)
4.6	120.0											4.6
5.0	120.0	108.0 /5.2										5.0
5.5	109.9	108.0	84.0 /5.7									5.5
6.0	101.1	100.9	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	87.0	86.8	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	76.3	76.1	75.9	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.7	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.3	55.2	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.5	42.4	42.3	42.1	36.0	36.0	12.0
14.0	34.5	34.5	34.5	34.4	34.3	34.2	34.2	34.0	33.8	33.8	33.6	14.0
16.0	32.9 /14.5	28.8	28.7	28.7	28.6	28.4	28.4	28.2	28.0	28.0	27.8	16.0
18.0		26.3 /17.1	24.5	24.4	24.3	24.2	24.1	23.9	23.7	23.7	23.5	18.0
20.0			21.6 /19.7	21.1	21.0	20.9	20.8	20.6	20.4	20.4	20.2	20.0
22.0				18.6	18.4	18.3	18.2	18.0	17.8	17.8	17.5	22.0
24.0				18.2 /22.3	16.3	16.2	16.1	15.9	15.7	15.6	15.4	24.0
26.0					15.5 /24.9	14.4	14.3	14.1	13.9	13.9	13.6	26.0
28.0						13.3 /27.5	12.9	12.7	12.4	12.4	12.2	28.0
30.0							11.6	11.4	11.2	11.1	10.9	30.0
32.0							11.6 /30.1	10.3	10.1	10.0	9.8	32.0
34.0								10.0 /32.7	9.2	9.1	8.8	34.0
36.0									8.6 /35.3	8.3	8.0	36.0
38.0										7.6 /37.9	7.3	38.0
40.0											6.6	40.0
42.0											6.5 /40.5	42.0

Working Radius (m)	Boom length (m)						Unit: ton
	48	51	54	57	60	63	Working Radius (m)
10.0	36.0 /10.6	24.0 /11.2	24.0 /11.7				10.0
12.0	36.0	24.0	24.0	24.0 /12.3	24.0 /12.9	24.0 /13.5	12.0
14.0	33.6	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.8	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.5	23.3	23.1	23.0	22.8	22.2	18.0
20.0	20.1	20.0	19.8	19.7	19.7	19.4	20.0
22.0	17.5	17.4	17.2	17.0	17.0	16.8	22.0
24.0	15.4	15.3	15.0	14.9	14.9	14.6	24.0
26.0	13.6	13.5	13.2	13.1	13.1	12.9	26.0
28.0	12.1	12.0	11.8	11.6	11.6	11.4	28.0
30.0	10.8	10.7	10.5	10.3	10.3	10.1	30.0
32.0	9.8	9.6	9.4	9.2	9.2	9.0	32.0
34.0	8.8	8.7	8.4	8.3	8.2	8.0	34.0
36.0	8.0	7.8	7.6	7.4	7.4	7.2	36.0
38.0	7.2	7.1	6.8	6.7	6.6	6.4	38.0
40.0	6.6	6.4	6.2	6.0	6.0	5.7	40.0
42.0	6.0	5.8	5.6	5.4	5.4	5.1	42.0
44.0	5.7 /43.1	5.3	5.0	4.9	4.8	4.6	44.0
46.0		4.9 /45.7	4.6	4.4	4.3	4.1	46.0
48.0			4.1	4.0	3.9	3.6	48.0
50.0			4.1 /48.3	3.6	3.5	3.2	50.0
52.0				3.4 /50.9	3.1	2.9	52.0
54.0					2.9 /53.2	2.5	54.0
56.0						2.2 /55.8	56.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
- Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	

Main Boom with Aux. Sheave (Using Third Winch) (With Tower Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
4.6	120.0											4.6
5.0	119.5	108.0 /5.2										5.0
5.5	109.1	108.0	84.0 /5.7									5.5
6.0	100.2	100.0	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	86.2	86.0	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	75.4	75.2	75.1	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.0	55.1	55.0	55.0	54.9	54.8	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.1	42.0	41.9	41.7	36.0	36.0	12.0
14.0	34.2	34.2	34.1	34.1	33.9	33.8	33.7	33.6	33.4	33.4	33.1	14.0
16.0	32.6 /14.5	28.4	28.4	28.3	28.2	28.0	28.0	27.8	27.6	27.6	27.3	16.0
18.0		26.0 /17.1	24.1	24.1	23.9	23.8	23.7	23.5	23.3	23.3	23.0	18.0
20.0			21.3 /19.7	20.8	20.6	20.5	20.4	20.2	20.0	20.0	19.7	20.0
22.0				18.2	18.1	17.9	17.8	17.6	17.4	17.4	17.1	22.0
24.0				17.9 /22.3	16.0	15.8	15.7	15.5	15.3	15.2	15.0	24.0
26.0					15.1 /24.9	14.1	14.0	13.8	13.5	13.5	13.2	26.0
28.0						12.9 /27.5	12.5	12.3	12.1	12.0	11.7	28.0
30.0							11.3	11.1	10.8	10.7	10.5	30.0
32.0							11.2 /30.1	10.0	9.7	9.7	9.4	32.0
34.0								9.6 /32.7	8.8	8.7	8.5	34.0
36.0									8.3 /35.3	7.9	7.6	36.0
38.0										7.2 /37.9	6.9	38.0
40.0											6.3	40.0
42.0											6.1 /40.5	42.0


Radius (m)	Boom length (m)						Unit: ton
	48	51	54	57	60	63	Radius (m)
10.0	36.0 /10.6	24.0 /11.2	24.0 /11.7				10.0
12.0	36.0	24.0	24.0	24.0 /12.3	24.0 /12.9	24.0 /13.5	12.0
14.0	33.1	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.3	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.0	22.9	22.6	22.5	22.1	21.5	18.0
20.0	19.7	19.6	19.3	19.2	19.2	18.7	20.0
22.0	17.1	16.9	16.7	16.6	16.5	16.3	22.0
24.0	14.9	14.8	14.6	14.4	14.4	14.2	24.0
26.0	13.2	13.0	12.8	12.7	12.6	12.4	26.0
28.0	11.7	11.6	11.3	11.2	11.1	10.9	28.0
30.0	10.4	10.3	10.0	9.9	9.8	9.6	30.0
32.0	9.3	9.2	8.9	8.8	8.7	8.5	32.0
34.0	8.4	8.3	8.0	7.8	7.8	7.5	34.0
36.0	7.6	7.4	7.2	7.0	6.9	6.7	36.0
38.0	6.8	6.7	6.4	6.3	6.2	5.9	38.0
40.0	6.2	6.0	5.8	5.6	5.5	5.3	40.0
42.0	5.6	5.4	5.2	5.0	4.9	4.7	42.0
44.0	5.3 /43.1	4.9	4.6	4.5	4.4	4.1	44.0
46.0		4.5 /45.7	4.2	4.0	3.9	3.6	46.0
48.0			3.7	3.6	3.5	3.2	48.0
50.0			3.7 /48.3	3.2	3.1	2.8	50.0
52.0				3.0 /50.9	2.7	2.4	52.0
54.0					2.5 /53.2	2.1	54.0
56.0						1.9 /55.4	56.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
- Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	

Tower Specifications

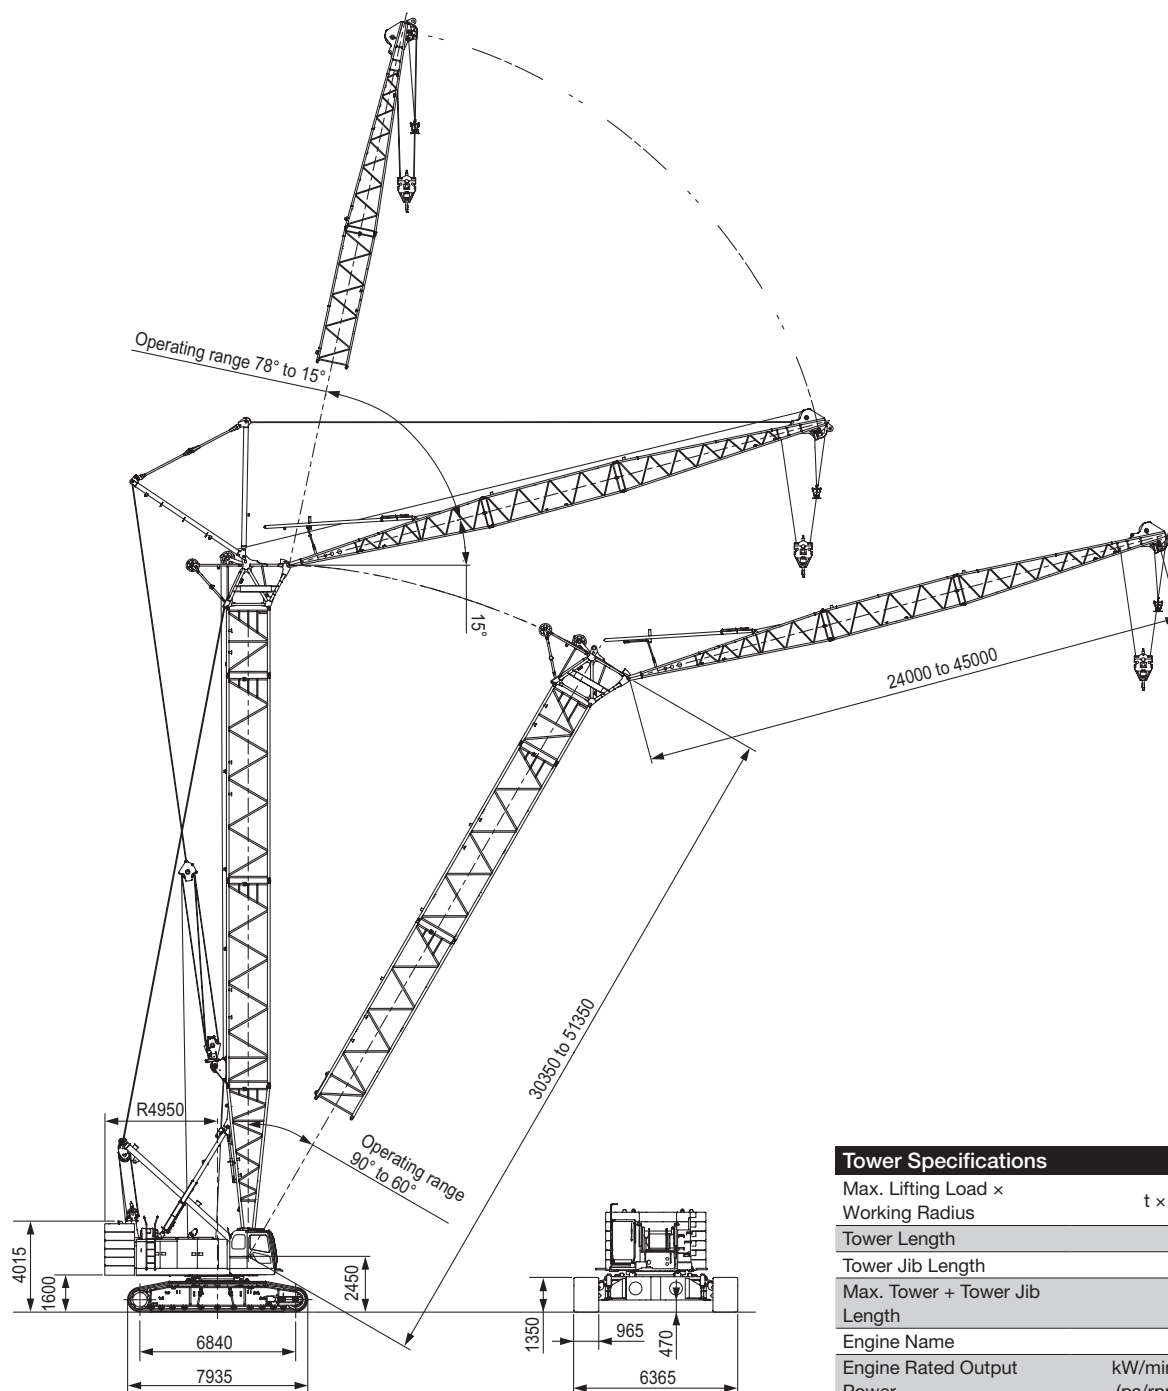Dimensions and Specifications



Tower Specifications

Max. Lifting Load × Working Radius	t × m	20 × 14.0
Tower Length	m	30.35 to 51.35
Tower Jib Length	m	24.00 to 45.00
Max. Tower + Tower Jib Length	m	51.35 + 45.00
Engine Name	ISUZU 6HK1 (Stage 3B)	
Engine Rated Output	kW/min ⁻¹	210 / 1,900
Power	(ps/rpm)	(285 / 1,900)
Ground Contact Pressure	kPa (kgf/cm ²)	99 (1.01) (Max. Tower + Tower Jib Length)
Overall Operating Weight	t	Approximately 137 (Max. Tower + Tower Jib Length)

Note :

- Speeds marked with "*" may vary depending on load applied.
- SI units are used for specifications. In parenthesis, conventional units are also indicated.

Tower and Tower Jib Configurations

Tower	
Tower Length (m)	Tower Boom Configurations
30.35	
33.35	
36.35	
39.35	
42.35	
45.35	
48.35	
51.35	

▽ indicates the midpoint pendant rope connection position.


Dimensions Not Shown In The Figure	
Symbols	Tower Boom Length (m)
1.85	1.85
3	3
6	6
7.5	7.5
9	9
9B	9
9 with Rail	9

Tower Jib	
Tower Jib Length (m)	Tower Jib Configurations
24	
27	
30	
33	
36	
39	
42	
45	

Dimensions Not Shown In The Figure	
Symbols	Tower Jib Length (m)
3	3
6	6
9	9

Working Ranges

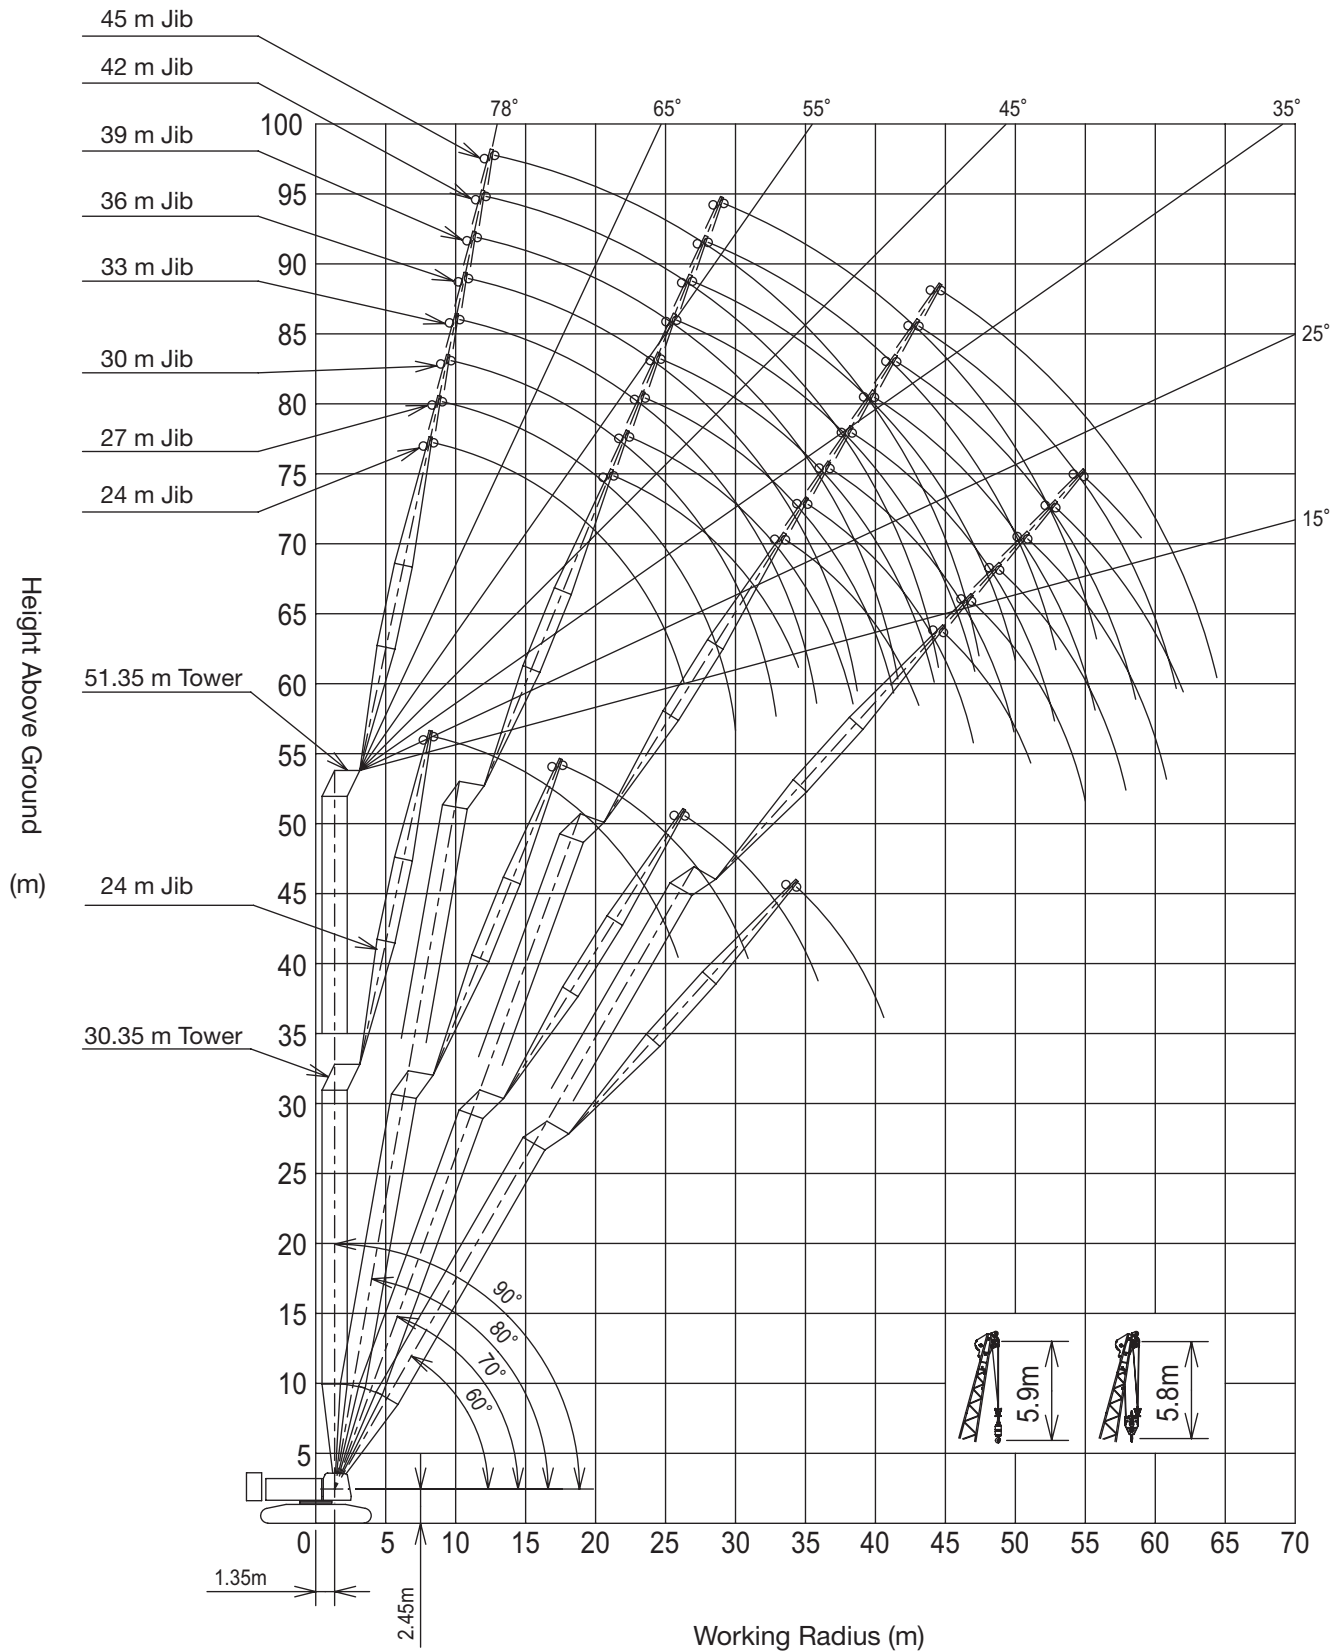Tower Boom



Gross Rated Load Table

30.35 m Tower



Unit: ton

Tower Length (m)	30.35				Tower Length (m)
Jib Length (m)	24				Jib Length (m)
Tower Angle (deg)	90	80	70	60	Tower Angle (deg)
Radius (m)					Radius (m)
9.3	35.0				9.2
10.0	33.5				10.0
12.0	31.2				12.0
14.0	26.4				14.0
16.0	22.3	18.4 / 17.4			16.0
18.0	19.2	17.7			18.0
20.0	16.8	15.5			20.0
22.0	15.0	13.8			22.0
24.0	13.1	12.4			24.0
26.0	8.5	11.2	10.2		26.0
28.0	7.1 / 26.6	10.2	9.3		28.0
30.0		9.4	8.5		30.0
32.0		8.7 / 31.6	7.9	6.6 / 33.9	32.0
34.0			7.3	6.5	34.0
36.0			6.7	6.1	36.0
38.0			6.6 / 36.6	5.7	38.0
40.0				5.3	40.0
42.0				5.1 / 41.3	42.0

33.35 m Tower

Unit: ton

Tower Length (m)	33.35								Tower Length (m)
Jib Length (m)	24				27				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)									Radius (m)
9.3	33.8 / 9.4								9.2
10.0	33.1				29.0 / 10.1				10.0
12.0	30.8				27.2				12.0
14.0	26.4				25.5				14.0
16.0	22.3				22.2				16.0
18.0	19.2	17.5			19.1	16.1 / 19.1			18.0
20.0	16.9	15.3			16.8	15.2			20.0
22.0	15.0	13.6			14.9	13.5			22.0
24.0	13.1	12.2			13.4	12.1			24.0
26.0	8.8	11.1	9.4 / 27.1		12.0	11.0			26.0
28.0	7.5 / 26.6	10.1	9.0		9.7	10.0	8.6 / 28.7		28.0
30.0		9.3	8.3		5.5 / 29.8	9.2	8.2		30.0
32.0		8.5	7.6			8.5	7.5		32.0
34.0		8.5 / 32.1	7.1	5.9 / 35.4		7.8	7.0		34.0
36.0			6.6	5.8		7.6 / 35.3	6.5	5.4 / 37.4	36.0
38.0			6.1 / 37.7	5.4			6.0	5.3	38.0
40.0				5.1			5.6	5.0	40.0
42.0				4.7			5.5 / 40.9	4.6	42.0
44.0				4.7 / 42.8				4.3	44.0
46.0								4.1	46.0

- The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
- The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
35	0.90
12	0.51

- Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
- The counterweight is 49.6 ton.
- 1 reeving line on 24m jib is not permitted.

36.35 m Tower



36.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)													Radius (m)
9.4	33.0												9.2
10.0	32.2				29.1 / 10.1				24.9 / 10.8				10.0
12.0	29.7				27.4				24.0				12.0
14.0	26.5				25.7				22.6				14.0
16.0	22.3				22.2				21.4				16.0
18.0	19.2	16.7 / 18.5			19.2	15.4 / 19.6			19.1				18.0
20.0	16.9	15.2			16.8	15.0			16.7	14.3 / 20.7			20.0
22.0	15.0	13.5			14.9	13.4			14.9	13.2			22.0
24.0	13.2	12.2			13.4	12.0			13.3	11.9			24.0
26.0	8.9	11.1			12.0	10.8			12.1	10.7			26.0
28.0	7.4 / 26.7	10.1	8.7 / 28.1		10.0	9.9	8.0 / 29.7		10.9	9.8			28.0
30.0		9.3	8.1		5.4 / 29.9	9.1	7.9		9.5	9.0	7.4 / 31.3		30.0
32.0		8.1	7.4			8.4	7.3		6.5	8.3	7.2		32.0
34.0		6.6 / 32.6	6.9			7.7	6.8		5.4 / 32.8	7.7	6.6		34.0
36.0			6.4	5.4 / 36.9		7.3 / 35.8	6.3			7.1	6.2		36.0
38.0			5.8	5.2			5.8	4.9 / 38.9		6.5	5.7		38.0
40.0			5.7 / 38.7	4.8			5.5	4.7		6.4 / 38.7	5.4	4.4 / 40.9	40.0
42.0				4.5			5.1 / 41.9	4.4			5.0	4.3	42.0
44.0				4.2				4.1			4.6	4.0	44.0
46.0				4.2 / 44.3				3.9			4.5 / 44.8	3.7	46.0
48.0								3.7 / 47.5				3.5	48.0
50.0												3.2	50.0
52.0												3.2 / 50.4	52.0

■ **39.35 m Tower**



Unit: ton													Tower Length (m)
Tower Length (m)	39.35												Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
9.4	31.1												9.3
10.0	30.3				28.8 / 10.1				24.8 / 10.8				10.0
12.0	28.2				26.8				23.9				12.0
14.0	26.5				25.1				22.5				14.0
16.0	22.3				22.2				21.3				16.0
18.0	19.3	16.0 / 19.0			19.2				19.1				18.0
20.0	16.9	15.0			16.8	14.8 / 20.1			16.7	13.7 / 21.2			20.0
22.0	15.0	13.3			14.9	13.2			14.9	13.1			22.0
24.0	13.2	12.0			13.4	11.9			13.3	11.7			24.0
26.0	9.1	10.8			12.0	10.7			12.1	10.6			26.0
28.0	7.7 / 26.7	9.9	8.2 / 29.1		10.2	9.8			10.9	9.7			28.0
30.0		9.1	7.8		5.5 / 29.9	9.0	7.5 / 30.7		9.5	8.9			30.0
32.0		8.4	7.2			8.3	7.1		6.7	8.2	6.9 / 32.3		32.0
34.0		7.9 / 33.2	6.7			7.7	6.6		5.6 / 32.8	7.6	6.5		34.0
36.0			6.2			7.1	6.1			7.0	6.0		36.0
38.0			5.8	4.8 / 38.4		7.0 / 36.4	5.7			6.5	5.6		38.0
40.0			5.4 / 39.7	4.6			5.3	4.4 / 40.4		6.3 / 39.3	5.2		40.0
42.0				4.3			4.9	4.2			4.9	4.0 / 42.4	42.0
44.0				4.0			4.8 / 42.9	3.9			4.6	3.8	44.0
46.0				3.8 / 45.8				3.7			4.2 / 45.8	3.5	46.0
48.0								3.4				3.3	48.0
50.0								3.3 / 49.0				3.1	50.0
52.0												2.9 / 51.9	52.0

Unit: ton						Tower Length (m)
Tower Length (m)	39.35					Tower Length (m)
Jib Length (m)	33					Jib Length (m)
Tower Angle (deg)	90	80	70	60	Tower Angle (deg)	Tower Angle (deg)
Radius (m)	90	80	70	60	Radius (m)	Radius (m)
10.0	22.0 / 10.8				10.0	
12.0	21.2				12.0	
14.0	20.0				14.0	
16.0	18.9				16.0	
18.0	17.9				18.0	
20.0	16.7				20.0	
22.0	14.8	12.7 / 22.4			22.0	
24.0	13.3	11.7			24.0	
26.0	12.0	10.5			26.0	
28.0	11.0	9.6			28.0	
30.0	9.9	8.8			30.0	
32.0	8.8	8.1	6.4 / 33.9		32.0	
34.0	7.4	7.5	6.4		34.0	
36.0	4.6 / 35.7	7.0	5.9		36.0	
38.0		6.5	5.5		38.0	
40.0		6.1	5.1		40.0	
42.0		5.6	4.8		42.0	
44.0		5.6 / 42.2	4.5	3.6 / 44.4	44.0	
46.0			4.2	3.5	46.0	
48.0			3.9	3.2	48.0	
50.0			3.9 / 48.7	3.0	50.0	
52.0				2.9	52.0	
54.0				2.6	54.0	
56.0				2.6 / 54.8	56.0	

■ 42.35 m Tower



Unit: ton													Tower Length (m)
Tower Length (m)	42.35												Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
9.5	28.7												9.3
10.0	28.2				26.6 / 10.2				24.6 / 10.9				10.0
12.0	26.2				24.9				23.7				12.0
14.0	24.8				23.4				22.1				14.0
16.0	22.3				22.2				20.9				16.0
18.0	19.3	15.3 / 19.5			19.2				19.1				18.0
20.0	16.9	14.8			16.8	14.2 / 20.6			16.7	13.1 / 21.8			20.0
22.0	15.0	13.2			15.0	13.1			14.9	12.9			22.0
24.0	13.2	11.8			13.4	11.7			13.3	11.6			24.0
26.0	9.2	10.7			12.0	10.6			12.1	10.5			26.0
28.0	7.9 / 26.7	9.8			10.2	9.7			10.9	9.6			28.0
30.0		9.0	7.6 / 30.1		5.9 / 29.9	8.9	7.0 / 31.7		9.5	8.8			30.0
32.0		8.3	7.0			8.2	6.9		6.9	8.1	6.4 / 33.3		32.0
34.0		7.7 / 33.7	6.5			7.6	6.4		5.9 / 32.8	7.5	6.3		34.0
36.0			6.0			7.0	5.9			6.9	5.8		36.0
38.0			5.6	4.4 / 39.9		6.8 / 36.9	5.5			6.5	5.4		38.0
40.0			5.2	4.3			5.1	4.0 / 41.9		6.0 / 39.8	5.0		40.0
42.0			5.1 / 40.7	4.1			4.8	3.9			4.7	3.6 / 43.9	42.0
44.0				3.8			4.5 / 43.9	3.7			4.4	3.5	44.0
46.0				3.6				3.5			4.1	3.3	46.0
48.0				3.3 / 47.3				3.2			4.0 / 46.8	3.1	48.0
50.0								3.0				2.9	50.0
52.0								3.0 / 50.5				2.8	52.0
54.0												2.6 / 53.4	54.0

Unit: ton													Tower Length (m)
Tower Length (m)	42.35												Tower Length (m)
Jib Length (m)	33				36								Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60					Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60					Radius (m)
10.0	16.8 / 10.9				15.1 / 11.5								10.0
12.0	16.2				15.1								12.0
14.0	15.3				14.2								14.0
16.0	14.4				13.4								16.0
18.0	13.7				12.8								18.0
20.0	13.1				12.2								20.0
22.0	12.6	12.2 / 22.9			11.7								22.0
24.0	12.2	11.5			11.2	11.4							24.0
26.0	11.9	10.4			10.9	10.3							26.0
28.0	11.0	9.5			10.6	9.4							28.0
30.0	9.9	8.7			10.0	8.6							30.0
32.0	8.8	8.0			9.1	7.9							32.0
34.0	7.5	7.4	6.0 / 34.9		8.1	7.3							34.0
36.0	4.6 / 35.7	6.9	5.7		7.1	6.8	5.5 / 36.5						36.0
38.0		6.4	5.3		5.2	6.3	5.2						38.0
40.0		6.0	4.9		4.7 / 38.6	5.9	4.9						40.0
42.0		5.6	4.6			5.5	4.5						42.0
44.0		5.5 / 42.7	4.3	3.2 / 45.9		5.2	4.2						44.0
46.0			4.1	3.2		4.9 / 45.6	4.0	3.0 / 47.9					46.0
48.0			3.8	3.0			3.7	2.9					48.0
50.0			3.6 / 49.7	2.8			3.5	2.8					50.0
52.0				2.7			3.3	2.6					52.0
54.0				2.5			3.3 / 52.6	2.4					54.0
56.0				2.3				2.3					56.0
58.0				2.3 / 56.3				2.2					58.0
60.0								1.9 / 59.2					60.0

■ **45.35 m Tower**



45.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
9.5	26.5												9.3
10.0	26.0				24.5 / 10.2				16.5 / 10.9				10.0
12.0	24.2				23.0				15.9				12.0
14.0	22.9				21.6				15.0				14.0
16.0	22.0				20.6				14.2				16.0
18.0	19.3				19.2				13.5				18.0
20.0	16.9	14.7			16.8	13.5 / 21.2			12.9				20.0
22.0	15.0	13.0			15.0	12.9			12.5	12.6 / 22.3			22.0
24.0	13.2	11.7			13.4	11.6			12.1	11.5			24.0
26.0	9.5	10.6			12.0	10.5			11.8	10.4			26.0
28.0	6.7 / 26.8	9.6			10.3	9.5			10.9	9.4			28.0
30.0		8.8	7.0 / 31.2		5.8	8.7			9.5	8.6			30.0
32.0		8.2	6.8			8.1	6.5 / 32.8		7.0	8.0			32.0
34.0		7.4	6.3			7.5	6.2		6.0 / 32.8	7.4	6.0 / 34.4		34.0
36.0		7.4 / 34.2	5.8			6.9	5.7			6.8	5.6		36.0
38.0			5.4			6.6 / 37.4	5.3			6.4	5.2		38.0
40.0			5.1	3.9 / 41.4			5.0			5.8	4.9		40.0
42.0			4.7 / 41.8	3.8			4.7	3.5 / 43.4		5.8 / 40.3	4.5		42.0
44.0				3.6			4.3	3.5			4.3	3.2 / 45.4	44.0
46.0				3.4			4.2 / 45.0	3.2			4.0	3.1	46.0
48.0				3.1				3.0			3.7 / 47.9	2.9	48.0
50.0				3.1 / 48.8				2.9				2.7	50.0
52.0								2.7				2.6	52.0
54.0												2.3	54.0
56.0												2.3 / 54.9	56.0

45.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	33				36				39				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
10.0	15.3 / 10.9				13.9 / 11.5								10.0
12.0	14.8				13.7				12.5 / 12.2				12.0
14.0	13.9				12.9				11.8				14.0
16.0	13.1				12.2				11.2				16.0
18.0	12.5				11.6				10.6				18.0
20.0	11.9				11.0				10.1				20.0
22.0	11.5	11.7 / 23.4			10.6				9.7				22.0
24.0	11.1	11.4			10.2	10.7 / 24.5			9.3	9.6 / 25.7			24.0
26.0	10.8	10.3			9.9	10.2			9.0	9.5			26.0
28.0	10.5	9.3			9.6	9.3			8.7	9.1			28.0
30.0	9.9	8.6			9.4	8.5			8.5	8.4			30.0
32.0	8.8	7.9			9.1	7.8			8.3	7.7			32.0
34.0	7.6	7.3	5.5 / 35.9		8.1	7.2			8.1	7.1			34.0
36.0	4.8 / 35.7	6.8	5.5		7.1	6.7	5.1 / 37.5		7.4	6.6			36.0
38.0		6.3	5.1		5.3	6.2	5.0		6.6	6.1	4.7 / 39.1		38.0
40.0		5.9	4.8		4.8 / 38.6	5.8	4.7		5.7	5.7	4.6		40.0
42.0		5.5	4.5			5.4	4.4		3.8 / 41.5	5.3	4.2		42.0
44.0		5.2 / 43.2	4.2			5.1	4.1			5.0	4.0		44.0
46.0			3.9	2.9 / 47.4		4.7	3.8			4.7	3.7		46.0
48.0			3.7	2.8		4.7 / 46.1	3.6	2.6 / 49.4		4.4	3.5		48.0
50.0			3.4	2.6			3.4	2.6		4.3 / 49.0	3.3	2.3 / 51.4	50.0
52.0			3.3 / 50.8	2.5			3.2	2.4			3.1	2.3	52.0
54.0				2.3			3.0 / 53.6	2.2			2.9	2.1	54.0
56.0				2.2				2.1			2.7	2.0	56.0
58.0				2.0 / 57.8				2.0			2.7 / 56.5	1.9	58.0
60.0								1.8				1.7	60.0
62.0								1.8 / 60.7				1.6	62.0
64.0												1.6 / 63.6	64.0

■ 48.35 m Tower



48.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
9.5	24.2												9.4
10.0	23.7				16.4 / 10.2				14.8 / 10.9				10.0
12.0	22.1				15.4				14.3				12.0
14.0	20.9				14.5				13.4				14.0
16.0	20.0				13.8				12.7				16.0
18.0	19.3				13.1				12.1				18.0
20.0	16.9	13.9 / 20.6			12.7	12.9 / 21.7			11.6				20.0
22.0	15.0	12.8			12.3	12.7			11.2	11.7 / 22.8			22.0
24.0	13.2	11.5			12.0	11.4			10.8	11.3			24.0
26.0	9.6	10.4			11.9	10.3			10.6	10.2			26.0
28.0	6.8 / 26.8	9.5			10.3	9.4			10.5	9.3			28.0
30.0		8.7			6.1	8.6			9.5	8.5			30.0
32.0		8.0	6.5 / 32.2			7.9	6.0 / 33.8		7.0	7.8			32.0
34.0		7.4	6.1			7.3	5.9		5.9 / 32.9	7.2	5.5 / 35.4		34.0
36.0		7.2 / 34.7	5.6			6.8	5.5			6.7	5.4		36.0
38.0			5.2			6.4 / 37.9	5.1			6.3	5.0		38.0
40.0			4.9				4.8			5.8	4.6		40.0
42.0			4.6	3.4 / 42.9			4.5			5.6 / 40.8	4.3		42.0
44.0			4.2 / 42.8	3.3			4.2	3.1 / 44.9			4.1		44.0
46.0				3.1			3.9	3.0			3.8	2.7 / 46.9	46.0
48.0				2.9				2.8			3.5	2.6	48.0
50.0				2.6				2.6			3.4 / 48.9	2.5	50.0
52.0				2.6 / 50.3				2.4				2.3	52.0
54.0								2.4 / 53.5				2.2	54.0
56.0												2.0	56.0
58.0												2.0 / 56.4	58.0

48.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	33				36				39				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
10.0	13.7 / 10.9				12.4 / 11.6								10.0
12.0	13.3				12.2				11.2 / 12.2				12.0
14.0	12.4				11.5				10.6				14.0
16.0	11.8				10.9				10.0				16.0
18.0	11.2				10.3				9.5				18.0
20.0	10.7				9.8				9.0				20.0
22.0	10.3	10.4 / 23.9			9.4				8.6				22.0
24.0	9.9	10.3			9.1	9.4 / 25.1			8.3				24.0
26.0	9.6	10.0			8.8	9.2			8.0	8.4 / 26.2			26.0
28.0	9.4	9.2			8.5	8.8			7.7	8.1			28.0
30.0	9.3	8.4			8.3	8.3			7.5	7.7			30.0
32.0	8.8	7.7			8.2	7.7			7.4	7.4			32.0
34.0	7.6	7.2			8.1	7.1			7.2	7.0			34.0
36.0	4.8 / 35.8	6.6	5.1 / 37.0		7.1	6.6			7.2	6.5			36.0
38.0		6.2	4.9		5.4	6.1	4.7 / 38.6		6.6	6.0			38.0
40.0		5.8	4.5		4.8 / 38.7	5.7	4.5		5.8	5.6	4.3 / 40.1		40.0
42.0		5.4	4.2			5.3	4.2		3.8 / 41.6	5.2	4.0		42.0
44.0		5.0 / 43.7	4.0			5.0	3.9			4.9	3.8		44.0
46.0			3.7			4.7	3.6			4.6	3.5		46.0
48.0			3.5	2.5 / 48.9		4.6 / 46.6	3.4			4.3	3.3		48.0
50.0			3.3	2.4			3.2	2.2 / 50.9		4.2 / 49.5	3.1		50.0
52.0			3.1 / 51.8	2.2			3.0	2.1			2.9	1.9 / 52.9	52.0
54.0				2.1			2.8	2.0			2.7	1.9	54.0
56.0				2.0			2.8 / 54.7	1.9			2.6	1.7	56.0
58.0				1.8				1.8			2.4 / 57.6	1.6	58.0
60.0				1.8 / 59.3				1.6				1.5	60.0
62.0								1.5				1.4	62.0
64.0								1.5 / 62.2				1.4 / 63.0	64.0

■ **48.35 m Tower**



Unit: ton

Tower Length (m)	48.35				Tower Length (m)
Jib Length (m)	42				Jib Length (m)
Tower Angle (deg) Radius (m)	90	80	70	60	Tower Angle (deg) Radius (m)
12.0	10.1 /12.9				12.0
14.0	9.7				14.0
16.0	9.2				16.0
18.0	8.7				18.0
20.0	8.3				20.0
22.0	7.9				22.0
24.0	7.6				24.0
26.0	7.3	7.4 /27.3			26.0
28.0	7.0	7.4			28.0
30.0	6.8	7.1			30.0
32.0	6.6	6.8			32.0
34.0	6.5	6.5			34.0
36.0	6.4	6.3			36.0
38.0	6.3	5.9			38.0
40.0	6.1	5.5	4.0 /41.7		40.0
42.0	5.5	5.2	3.9		42.0
44.0	4.1	4.8	3.7		44.0
46.0	3.8 /44.5	4.5	3.4		46.0
48.0		4.3	3.2		48.0
50.0		4.0	3.0		50.0
52.0		3.7	2.8		52.0
54.0		3.7 /52.4	2.6	1.7 /55.0	54.0
56.0			2.5	1.6	56.0
58.0			2.3	1.5	58.0
60.0			2.1	1.4	60.0
62.0			2.1 /60.5	1.4 /61.0	62.0

■ 51.35 m Tower



51.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	9.5	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	Radius (m)
21.7													9.4
21.2					14.8 / 10.2				13.3 / 10.9				10.0
					13.9				12.9				12.0
					13.1				12.1				14.0
					12.4				11.4				16.0
					11.8				10.9				18.0
					11.4				10.4				20.0
15.1	12.5				11.1	11.5 / 22.2			10.0	10.1 / 23.3			22.0
13.2	11.4				10.9	11.0			9.7	10.1			24.0
9.8	10.3				10.8	10.2			9.5	9.6			26.0
7.0 / 26.8	9.4				10.3	9.3			9.4	9.1			28.0
	8.6				6.3	8.5			9.4	8.4			30.0
	7.9	6.0 / 33.2			7.8				7.1	7.7			32.0
	7.3	5.8			7.2	5.5 / 34.8			6.1 / 32.9	7.1			34.0
	6.9 / 35.2	5.4			6.7	5.3				6.6	5.1 / 36.4		36.0
		5.0			6.2	4.9				6.2	4.8		38.0
		4.7			6.1 / 38.4	4.6				5.8	4.5		40.0
		4.4				4.3				5.3 / 41.3	4.2		42.0
		4.1 / 43.8	3.0 / 44.4			4.0					3.9		44.0
			2.9			3.7	2.7 / 46.4				3.6		46.0
			2.7			3.6 / 47.0	2.6				3.4	2.4 / 48.4	48.0
			2.5				2.4				3.2 / 49.9	2.3	50.0
			2.3 / 51.8				2.2					2.1	52.0
							2.0					2.0	54.0
							2.0 / 55.0					1.8	56.0
												1.7 / 57.9	58.0

51.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	33				36				39				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	Radius (m)
12.4 / 10.9					11.1 / 11.6				10.0 / 12.2				10.0
11.9					10.9				9.5				12.0
11.2					10.3				8.9				14.0
10.5					9.7				8.5				16.0
10.0					9.2				8.0				18.0
9.6					8.8				7.7				20.0
9.2					8.4				7.4				22.0
8.9	9.2 / 24.5				8.1	8.2 / 25.6			7.1	7.4 / 26.7			24.0
8.6	8.9				7.8	8.1			6.9	7.1			26.0
8.4	8.5				7.6	7.8			6.7	6.8			28.0
8.3	8.1				7.5	7.5			6.5	6.5			30.0
8.3	7.6				7.3	7.2			6.4	6.3			32.0
7.6	7.0				7.3	6.9			6.4	6.0			34.0
5.0 / 35.8	6.5				7.1	6.5			6.4	5.9			36.0
	6.1	4.7			5.5	6.0	4.3 / 39.6		6.4	5.5	4.0 / 41.2		38.0
	5.7	4.4			5.0 / 38.7	5.6	4.3		5.8	5.1	3.8		40.0
	5.3	4.1			5.2	4.0			3.8 / 41.6	4.8	3.6		42.0
	4.9	3.8			4.9	3.7				4.5	3.3		44.0
	4.9 / 44.2	3.6			4.6	3.5				4.3	3.1		46.0
		3.3			4.6 / 47.1	3.3				4.0	2.9		48.0
		3.1	2.1 / 50.4			3.1					2.8		50.0
		2.9	2.0			2.9	1.9 / 52.4				2.6	1.6 / 54.4	52.0
		2.9 / 52.8	1.9			2.7	1.8				2.4	1.5	54.0
			1.8			2.5 / 55.7	1.7				2.2	1.4	56.0
			1.6				1.6				2.2 / 58.6	1.4 / 59.0	58.0
			1.4				1.5						60.0
				1.4 / 60.8			1.4						62.0


■ **51.35 m Tower**



51.35							Unit: ton
Tower Length (m)							Tower Length (m)
Jib Length (m)	42			45			Jib Length (m)
Tower Angle (deg)	90	80	70	90	80	70	Tower Angle (deg)
Radius (m)							Radius (m)
12.0	9.0 /12.9			8.1 /13.5			12.0
14.0	8.7			7.9			14.0
16.0	8.2			7.5			16.0
18.0	7.8			7.1			18.0
20.0	7.4			6.7			20.0
22.0	7.0			6.4			22.0
24.0	6.7			6.1			24.0
26.0	6.4	6.5 /27.8		5.8			26.0
28.0	6.2	6.4		5.6	5.8 /28.9		28.0
30.0	6.0	6.2		5.4	5.7		30.0
32.0	5.9	5.9		5.3	5.4		32.0
34.0	5.7	5.7		5.1	5.2		34.0
36.0	5.6	5.5		5.0	5.0		36.0
38.0	5.6	5.3		4.9	4.8		38.0
40.0	5.6	5.1		4.9	4.6		40.0
42.0	5.5	5.0	3.6 /42.8	4.8	4.5		42.0
44.0	4.2	4.7	3.5	4.8	4.3	3.4 /44.4	44.0
46.0	3.9 /44.5	4.4	3.3	4.4	4.2	3.2	46.0
48.0		4.2	3.0	3.0 /47.4	4.1	3.0	48.0
50.0		3.9	2.8		3.9	2.8	50.0
52.0		3.7	2.7		3.6	2.6	52.0
54.0		3.6 /52.9	2.5		3.4	2.4	54.0
56.0			2.3		3.3 /55.8	2.3	56.0
58.0			2.2			2.1	58.0
60.0			2.1			2.0	60.0
62.0			1.9 /61.5			1.9	62.0
64.0						1.7	64.0
66.0						1.7 /64.4	66.0

Clamshell Specifications

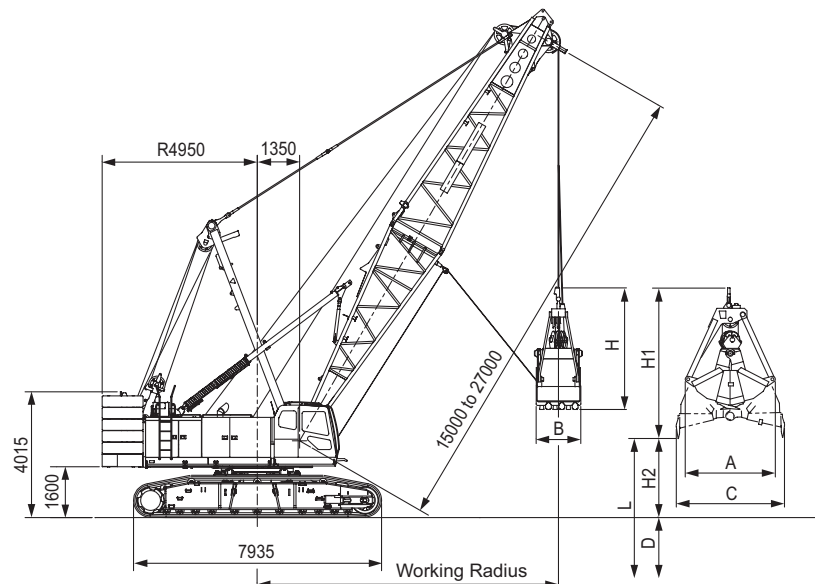Dimensions and Specifications



Working Ranges

Boom Length	m	15				18				21				24				27			
Boom Angle °		35	45	55	65	35	45	55	65	35	45	55	65	35	45	55	65	35	45	55	65
Working Radius	m	14.2	12.6	11	8.5	16.6	14.7	12.7	9.7	19.1	16.8	14.4	11.0	21.5	19.0	16.1	12.3	24.0	21.0	17.8	13.5
Gross Rated Load	t	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Lift L (D + H2)	m	39.4	40.5	41.5	42.3	41.1	42.6	43.9	45	42.8	44.7	45.7	47.7	44.5	46.8	47.4	50.4	46.2	48.9	49.1	53.1
Max. Digging Depth D	m	36																			
Bucket Dumping Height H2	m	3.4	4.5	5.5	6.3	5.1	6.6	7.9	9	6.8	8.7	9.7	11.7	8.5	10.8	11.4	14.4	10.2	12.9	13.1	17.1

Specifications

Clamshell Specifications		
Bucket Capacity	m ³	2.5
Allowed Maximum Gross Weight for Clamshell Bucket and Captured Load Combined	t	10
Boom Length	m	15 to 27
Maximum Digging Depth	m	36
Support Wire Rope Speed *	m/min	64
Opening/Closing Wire Rope Speed *	m/min	64
Boom Hoist Drum Wire Rope Speed (Raise) *	m/min	44
Boom Hoist Drum Wire Rope Speed (Lower) *	m/min	44
Ground Contact Pressure	kPa (kgf/cm ²)	89 (0.91) (w/ Basic Boom, 2.5 m ³ Clamshell Bucket)
Overall Operating Weight	t	Approximately 122 (w/ Basic Boom, 2.5 m ³ Clamshell Bucket)

NOTE :

- Speeds marked with "*" may vary depending on load applied.
- SI units are used for specifications. In parenthesis, conventional units are also indicated.
- Specifications other than those shown above are the same as those shown in the crane specifications section.

Clamshell Bucket

Capacity (m ³)	Weight (t)	A (mm)	B (mm)	C (mm)	H (mm)	H1 (mm)
2.5	5.5	2,880	1,400	3,450	4,180	5,130

Gross Rated Load Table

Working Radius (m)	Boom Length (m)				
	15	18	21	24	27
8.5	10.0				
9.0	10.0	10.0 / 9.8			
10.0	10.0	10.0	10.0 / 11.1		
12.0	10.0	10.0	10.0	10.0 / 12.3	10.0 / 13.6
14.0	10.0 / 14.2	10.0	10.0	10.0	10.0
16.0		10.0	10.0	10.0	10.0
18.0		10.0 / 16.7	10.0	10.0	10.0
20.0			10.0 / 19.1	10.0	10.0
22.0				10.0 / 21.6	10.0
24.0					10.0

- Max. clamshell rating is 10.0 t.
- Mass of bucket plus load should not exceed clamshell ratings shown above. Following data are for a general digging application buckets.












Bucket capacity	2.0 m ³	2.5 m ³
Bucket mass	4.5 t	5.5 t

- In case of clamshell application, a 15.0 m boom is recommended as minimum length of boom, and max. boom length shall not exceed 27.0 m.
- Apparent specific gravity of lifting material :
Earth 1.7 to 1.8 t/m³
Gravel 1.8 to 2.0 t/m³
- A 49.6 t counterweight is required for all capacities on these charts.
- Max. digging depth below ground shall be 36 m.









Weights and Dimensions of Disassembled Units

Weights and Dimensions List

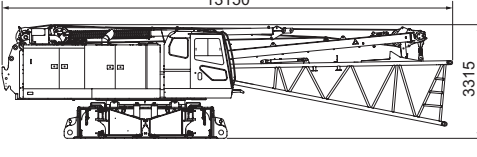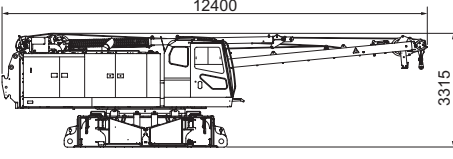







Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)		Weight (kg)
Base Crane with: Backstops Boom Base Mast Front Winch Wire Rope Jacks Upper & Lower Spreader Floats	1			39500
Base Crane with: Backstops Mast Front Winch Wire Rope Jacks Upper & Lower Spreader Floats	1			37300
Base Crane with: Boom Hoist Winch Wire Rope Front Winch Wire Rope Upper & Lower Spreader Without: Mast Jacks Floats	1			33100
Base Crane Without: Mast Wire Rope Jacks Upper & Lower Spreader Floats	1			30000
Crawler (Assembly)	2			14200
Jack Beams	4	 Width 330		420

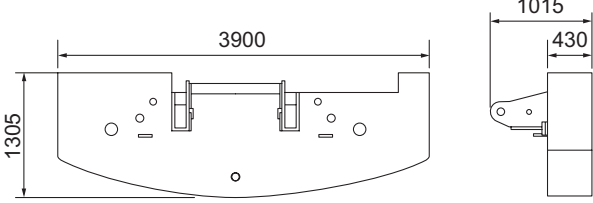
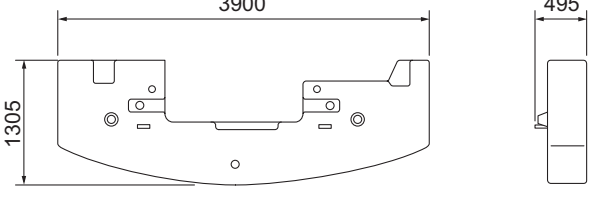
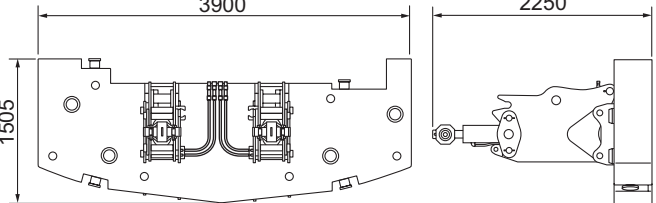
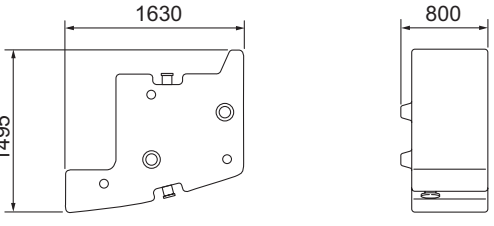
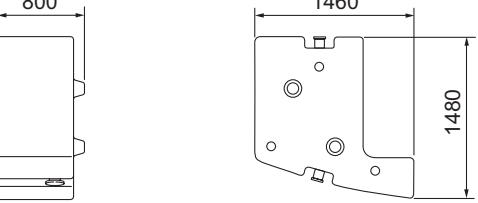
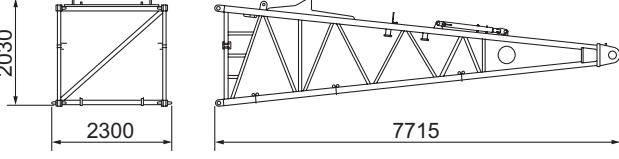
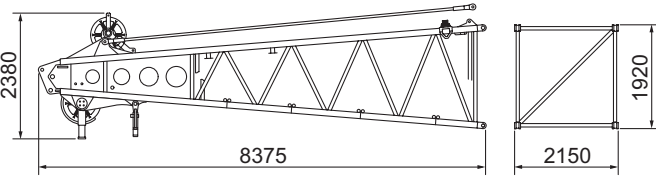
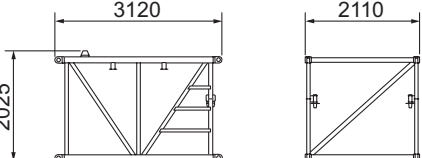
Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Counterweight (Base)	1		9100
Counterweight	5		8100
Counterweight with Self Assembly Unit (Base)	1		9100
Counterweight (For Counterweight with Self Assembly Unit)	3		6410
Counterweight (For Counterweight with Self Assembly Unit)	3		6780
Boom Base	1		2300
Boom Top	1		2200
3 m Boom Insert	1		470

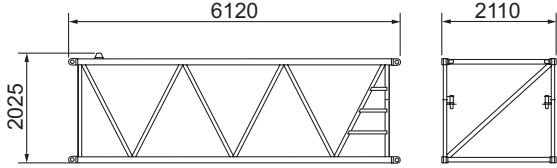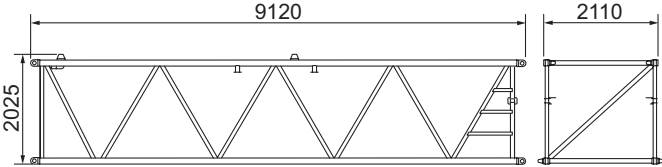
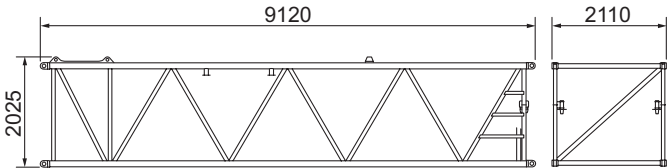
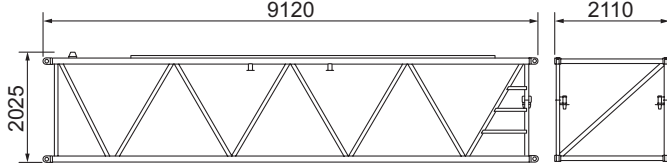
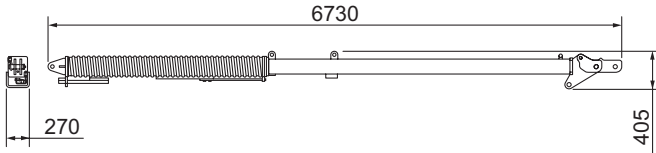
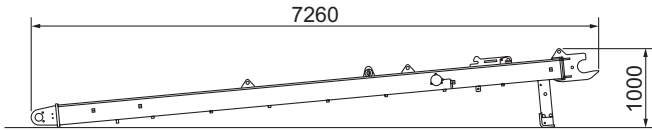
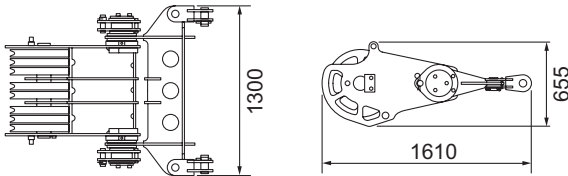
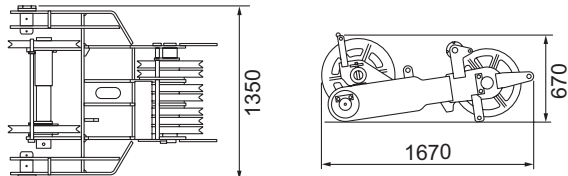
Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
6 m Boom Insert	1		760
9 m Boom Insert	1		1050
9 m (B) Boom Insert	1		1380
9 m Boom Insert (with Rail)	1		1180
Boom Backstops	2		490
Mast	1	 Width 1230	1480
Upper Spreader	1		810
Lower Spreader	1		870

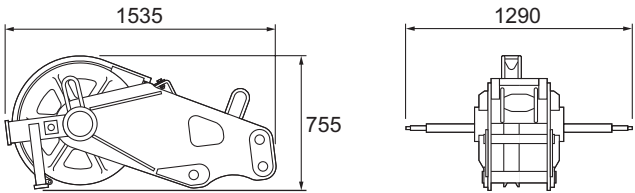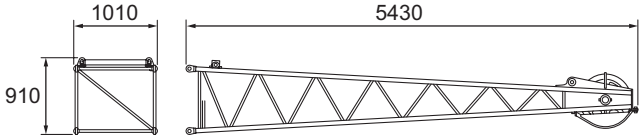
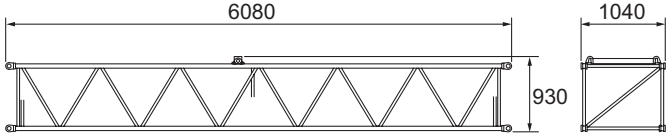




Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Aux. Sheave	1		350
Jib Base (with Jib Strut)	1		580
Jib Top	1		290
6 m Jib Insert	1		190
120 t Hook	1		1640
80 t Hook	1		1350
35 t Hook	1		900
12 t Hook	1		510

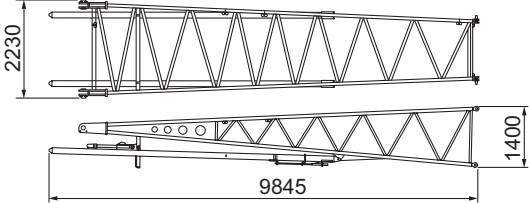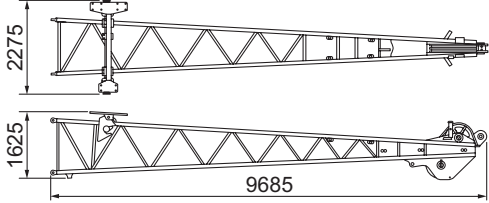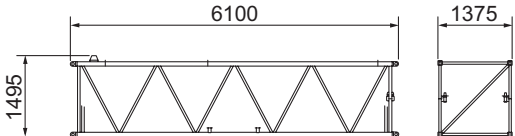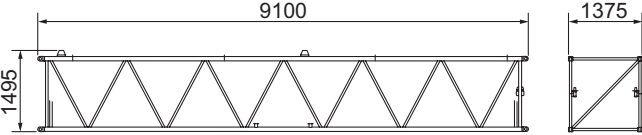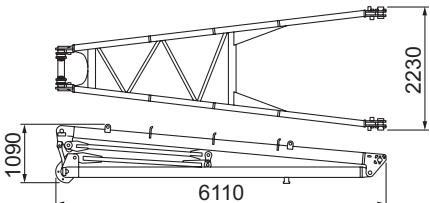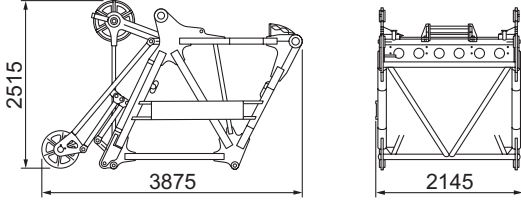Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Tower/Luffing Jib Base (with Jib Backstops)	1		1100
Tower/Luffing Jib Top (with Jib Catch)	1		1240
3 m Tower/Luffing Jib Insert	1		210
6 m Tower/Luffing Jib Insert	1		360
9 m Tower/Luffing Jib Insert	1		510
Compression Member	1		1200
Tower/Luffing Jib Top (with Link and Tower Guide Roller)	1		1300

Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)		Weight (kg)
Tower Guide Sheave	1			320
Tower Upper Spreader	1			400
Tower Lower Spreader	1			400

Equipment List

Standard and Optional Equipment

○ : Standard ● : Optional — : No setting

Item		Crane	Crane / Tower	Clamshell
Lower Structure	965 mm Shoe	○	○	○
	Jack	○	○	○
	Crawler Side Frame Connecting Unit	○	○	○
	Up/Down Steps	○	○	○
	Shoe Tension Unit (Hydraulic)	●	●	●
	Low Wear Shoe (Contiguous surface of roller)	●	●	●
Upper Structure	Cab Up/Down Catwalk	○	○	○
	Upper House Handrails (For catwalk)	○	○	○
	Under Cover (Bed lower surface)	○	○	○
	Working Light (× 2)	○	○	○
	Back Mirror (Left and right)	○	○	○
	Central Lubrication Unit (For turntable bearing)	○	○	○
	Drum Flange Cover	○	○	○
	Auto Idle Stop	○	○	○
	Eco Winch	○	○	○
	Drum Mirror	●	●	●
	Drum Light (Front winch)	●	●	●
	Winch Rope Retainer (Front winch)	●	●	●
	Winch Rope Retainer (Rear winch)	●	●	●
	Catwalk (Folding type, Left / Right)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Electric Fuel Pump	●	●	●
	Upper House Handrails (Folding type)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Winch with Front, Rear Free Mechanism	●	●	●
	Third Winch (Rope not included) (with Free mechanism)	●	● ^{*3}	-
Cab	Air Conditioner	○	○	○
	Sunvisor	○	○	○
	Sunshade	○	○	○
	Wiper with Washer (Front window, Cab roof window)	○	○	○
	Microphone & Loud-Speaker	●	●	●
	AM / FM Radio (with Clock)	○	○	○
	Room Lamp	○	○	○
	Cup Holder	○	○	○
	24 V Power Socket (× 2)	○	○	○
	Floor Mat	○	○	○
	Floor Carpet	●	●	●
	Level Gauge (Driver & lower)	○	○	○
	Accelerator Pedal (Right side)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Arm Chair Lever	○	○	○
	Cross Operation Lever (Lever lock not attached)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Front Operation Lever (with Lever lock)	●	●	●
	Standard Seat	○	○	○
	Seat with Suspension	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Travel Operation Pedal (Cannot be installed when free mechanism attached)	●	●	●
	Boom Hoist Operation Pedal ^{*1}	●	●	●
	Swing Brake Operation Pedal ^{*1}	●	●	●
	Fan	●	●	●
	Front/Rear Operation Lever, Brake Pedal Selector	●	●	●
	Fuel Burning Heater	●	●	●
	Accelerator Grip	○	○	○
	Drum Rotation Sensor (Front/Rear/Boom Hoist) ^{*2}	○	○	○
	Speed Control Dial (Front/Rear/Boom Hoist/Swing)	○	○	○
	Lifhammer	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}

*1 Cannot be installed at the same time.

*2 Cannot be equipped when the cross operation lever or front operation lever is installed.

*3 The third winch can only be used in the crane specification. It cannot be used in the tower specification.

*4 Europe specification machines only

○ : Standard ● : Optional — : No setting

Item			Crane	Crane / Tower	Clamshell
Attachment	15 m Basic Boom (Boom base: 7.5 m, Top: 7.5 m)		○	○	○
	3 m Boom Insert		●	●	●
	6 m Boom Insert		●	●	●
	9 m Boom Insert		●	●	●
	Parts set for 10 m crane jib [10 m Basic jib, Anti-two block, Jib mast]		●	●	-
	6 m Crane Jib Insert		●	●	-
	51.35 m Tower Boom (Tower/luffing (boom) base: 7.5 m, 3 m × 2, 9 m × 4, Tower/luffing (boom) top: 1.85 m)		-	○	-
	9 m Boom Insert (For tower, with upper spreader rail)		-	○	-
	9 m Boom Insert (For tower)		-	○	-
	45 m Tower Jib (Tower/luffing jib base: 9 m, 3 m, 6 m, 9 m × 2, Tower/luffing jib top: 9 m)		-	○	-
	Midpoint Pendant Rope (Required when the boom length is 66 m or longer)		●	●	-
	3 m Tower/Luffing Jib Insert		-	○	-
	6 m Tower/Luffing Jib Insert		-	○	-
	9 m Tower/Luffing Jib Insert		-	○	-
	Parts Set for Auxiliary Sheave [Auxiliary sheave, Auxiliary sheave anti-two block]		●	●	-
	120 t Hook (5 sheaves)		●	●	-
	80 t Hook (3 sheaves)		●	●	-
	35 t Hook (1 sheave)		●	●	-
	12 t Hook		●	●	-
Wire Rope	Front Winch (φ 26)	Mono Rope EP 3XF (40)	○	○	-
		P·S (19) + 39XP·7	●	●	-
		XP IWRC 6 X WS (31)	-	-	○ ^{*6}
	Rear Winch (φ 26)	Mono Rope EP 3XF (40)	●	●	-
		P·S (19) + 39XP·7	●	●	-
		IWRC 6 X P · WS (31)	-	○ ^{*7}	-
		XP IWRC 6 X WS (31)	-	-	○ ^{*8}
	Third Winch (φ 26)	Mono Rope EP 3XF (40)	●	●	-
		P·S (19) + 39XP·7	●	●	-
Safety Device	Boom Hoist Winch (φ 22.4)		○	○	○
	IWRC 6 X P · WS (31)		○	○	○
	Moment Limiter		○	○	○
	3 Color Percentage Indicator		●	●	●
	Gate Lock Lever		○	○	○
	Individual Winch Operation Lever Lock (Front, Rear, Hoist, Travel) ^{*5}		○	○	○
	Automatic Drum Lock (Boom Hoist)		○	○	○
	Winch Drum Lock (Front/Rear)		○	○	○
	Winch Drum Dead Turns Detective Device		○ ^{*9}	○ ^{*9}	○ ^{*9}
	Swing Lock		○	○	○
	Swing Alarm		○	○	○
	Travel Alarm		○	○	○
	Auto Slowdown (Slow stop)		○	○	○
	Boom Hoist Limiting Device		○	○	○
	Secondary Boom Over Hoist Prevent Device		○	○	○
	Voice Alarm		○	○	○
	Monitor Panel (Machine monitoring)		○	○	○
	Engine Start Interlock System		○	○	○
	Emergency Engine Stop Switch (In cab)		○	○	○
	Lifting Height Indication Device		○	○	○
	Anti-Two Block		○	○	-
	Tower Strut Overhoist Prevention Device		-	○	-
	Tower Jib Overhoist Prevention Device		-	○	-
	Secondary Tower Jib Overhoist Prevention Device		-	○	-
	Tower Jib Connection Detection Device		-	○	-
	Tower Jib Position Detection Device		-	○	-
	Moment Limiter (M/L) Mode Selector (In left house)		● / ○ ^{*9}	● / ○ ^{*9}	○
	Swing Restriction Unit		●	●	●
	Lowering Limiter		● / ○ ^{*9}	● / ○ ^{*9}	● / ○ ^{*9}
	Anemometer		●	○	-
	Obstacle Lights (Fixed lights)		●	●	-
	TW Jib Top Crane Boom Camera Monitor System (TV monitor)		-	●	-
	Drum and Rear View Monitor System (3 cameras)		●	●	●
	Cab Roof Window Guard		● / ○ ^{*9}	● / ○ ^{*9}	● / ○ ^{*9}

*5 An operation lever lock is not attached to the front, rear or hoist when the cross operation lever is installed.

*6 Opening/closing rope (φ 26 mm × 82 m). The standard length is 21 m for opening/closing and support ropes, and 12 m for excavation ropes.

*7 Required as a tower jib hoisting rope. In the crane jib specification, can also be used as a hoisting rope when using a crane jib or auxiliary sheave.

*8 Support rope (φ 26 mm × 70 m). The standard length is 21 m for opening/closing and support ropes, and 12 m for excavation ropes.

*9 Europe specification machines only

○ : Standard ● : Optional — : No setting

Item		Crane	Crane / Tower	Clamshell
Common parts	Boom Foot Pin Removal / Installation Cylinder	●	●	●
	Boom Back Stop	○	○	○
	Boom Angle Sensor	○	○	○
	Tower and Crane Boom Angle Sensor	-	○	-
	Boom Lifting Piece	○	○	○
	Assembly Pad ^{*10}	●	●	-
	Quick Draw for Side Frame Self Assembly ^{*11}	●	●	●
	Counterweight with Self Assembly Unit	●	●	●
	Skywalk (With Stanchion)	●	●	-
	Skywalk (Without Stanchion)	●	●	-
	Boom Top Under Surface Buffer (Protector)	●	●	●
	Load Table Sign (Whiteboard, boom base installation)	●	●	●
	Insertable Company Name Plate (Both side surfaces of the machine)	●	●	●
	Opening / Closing / Support Rope Stopper	-	-	○
	Hyd. Tagline (6 × Fi (29) φ 10 mm × 55 m)	● ^{*12}	● ^{*12}	○
	Reeving Winch (4 × F (30) φ 8 mm × 250 m)	● ^{*12}	● ^{*12}	-
	Reeving Winch Cum Hydraulic tagline	● ^{*12} For hydraulic tagline (6 × Fi (29) φ 10 mm × 55 m) For reeving (6 × Fi (29) φ 10 mm × 220 m)	● ^{*12} ● ^{*12}	-
	Reduction Counterweight Specification	● ^{*13}	● ^{*13}	-
	Sling Ropes for Disassembly and Assembly (For counterweights, Crawlers)	●	●	●
	Air Cleaner Double Element	○	○	○
Other	Additional Fuel Filter (Triple filter)	●	●	●
	Additional Spare Parts (Hydraulic oil filter)	●	●	●
	Additional Tools (Large hammer, Crowbar, Chisel)	●	●	●
Other	Standard Supplied Tools	○	○	○
	Standard Spare Parts	○	○	○

*10 The assembly pad is required for the following attachments.

- Crane Boom Longest Length 75m
- Crane Boom Length 72m + Aux. Sheave
- Crane Boom Length 63m + Crane Jib

It is not required for the tower attachment.

*11 When using the reeving winch or hydraulic tagline, remove the side frame self assembly quick draw.

*12 (1) Hydraulic tagline (maximum line pull: 2.9 kN (300 kg))

(2) Reeving winch unit (maximum line pull: 11.8 ZkN (1,200 kg))

(3) Reeving winch and hydraulic tagline

(Line pull: For hydraulic tagline (maximum line pull: 1.5 kN (150 kg)) /for reeving winch (maximum line pull: 2.9 kN (300 kg))

*13 The reduction counterweight specification can only be used for the crane specification, with the exception of the crane jib.

This image shows a full page of a worksheet designed for handwriting practice. It features 20 evenly spaced, horizontal dashed lines across the entire page, providing a guide for letter height and placement. The background is plain white, and there are no other markings or text present.

This image shows a blank sheet of white paper with horizontal dashed lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting or drawing. There are no margins, text, or other markings on the paper.

Handwriting practice lines consisting of 20 horizontal dashed lines.

- We are constantly improving our products and therefore reserve the right to change designs and specifications without notice.
- Units in this specification are shown under International System of Units; the figures in parenthesis are under Gravitational System of Units as old one.

Hitachi Sumitomo Heavy Industries Construction Crane Co.,Ltd.

9-3, Higashi-Ueno 6-chome, Taito-ku, Tokyo 110-0015, Japan
Phone: 81-3-3845-1387 Facsimile: 81-3-3845-1394

<http://www.hsc-crane.com>